

HSR/PRP

Hot-Swappable Line Module




Product Overview

The HSR/PRP line module is a hot-swappable industrial module. It supports both High-availability Seamless Redundancy (HSR) and Parallel Redundancy Protocol (PRP) protocols. The module may be inserted into slots 1 through 4 of the RAPTOR iMX350/iMX950.

The module has four combo ports which provides users the option of using either RJ45 or SFP interfaces for any HSR/PRP port.

The module supports up to two RedBoxes or a single QuadBox.

Features and Benefits

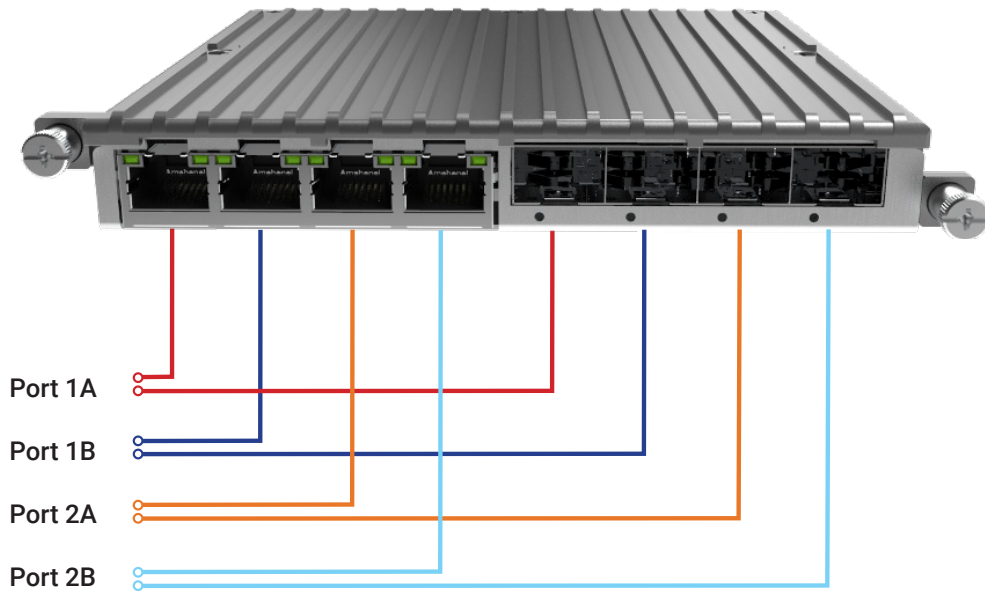


CONFIGURATION	DESCRIPTION
RedBox	Up to two RedBoxes supported. HSR, PRP and HSR-PRP coupling modes are supported
QuadBox	One HSR QuadBox supported

Features and Benefits


RedBox Architecture:

The following figure illustrates the RedBox architecture within the module and its connectivity to the switch backplane.

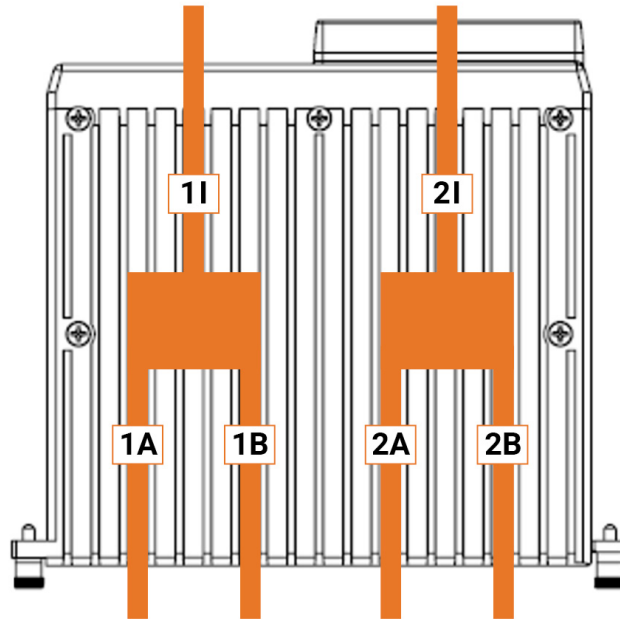

QuadBox Architecture:

The following figure illustrates the QuadBox architecture within the module. This configuration has no network connectivity to the switch backplane. Redundant network monitoring is supported.

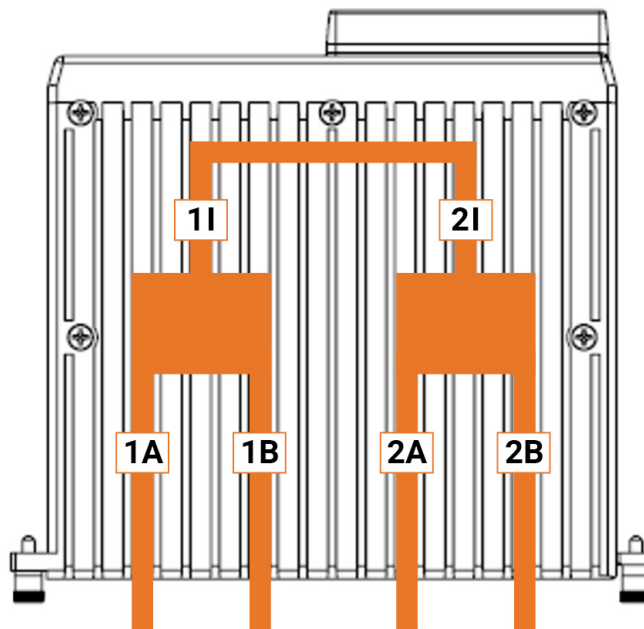

Product Specifications

Table 1. Compliance Specification

DESCRIPTION	SPECIFICATION	LEVEL
PRODUCT SAFETY TESTS		
IP RATING	IEC 61850-3 clause 6.6.2 IEC 60529 clause 6.11 ISO 20653:2013	IP40
PRODUCT SAFETY STANDARDS	IEC 62368-1	Product Safety Standard for Europe and North America
ELECTROMAGNETIC COMPATIBILITY (EMC) TESTS		
EMISSIONS AND IMMUNITY COMPLIANCE		
EUROPE	EN 55032:2012, CISPR 32:2012, Multimedia	Class A Equipment
	EN 55024:2010, CISPR 24:2010 , Multimedia	
NORTH AMERICA	FCC Part 15 Subpart B:2017, Multimedia	Class A Equipment
	ICES-003:2017, Multimedia	
IMMUNITY		
1 MHZ DAMPED OSCILLATORY WAVE	IEC 61850-3 clause 6.7.3 IEC 61000-4-18 IEEE 1613 clause 6 IEEE 1613.1 clause 5	2.5 kV CM, 1.0kV DM HV/Telec. 2.5 kV CM, 2.5kV DM Zone A
ELECTROSTATIC DISCHARGES	IEC 61850-3 clause 6.7.3 IEC 61000-4-2 IEEE 1613 clause 8 IEEE 1613.1 clause 8	8kV contact, 15kV air
RADIATED RADIO FREQUENCY MAGNETIC FIELD	IEC 61850-3 clause 6.7.3 IEC 61000-4-3 IEEE 1613 clause 7 IEEE 1613.1 clause 7	20 V/m
FAST TRANSIENT/BURST	IEC 61850-3 clause 6.7.3 IEC 61000-4-4 IEEE 1613 clause 6 IEEE 1613.1 clause 5	4kV
SURGE	IEC 61850-3 clause 6.7.3 IEC 61000-4-5 IEC 1613.1 clause 6	Signal Ports ± 2kV LE ± 1kV LL
CONDUCTED DISTURBANCE INDUCED BY RF FIELDS	IEC 61850-3 clause 6.7.3 IEC 61000-4-6 IEEE 1613.1 clause 9	0.15-80MHz at 10V 27, 68 MHz at 10V
CLIMATIC ENVIRONMENTAL TESTS		
DRY HEAT OPERATIONAL	IEC 61850-3 clause 6.9.3.1 IEC 60068-2-2, test Be	+85°C; 16 hours
	IEEE 1613 clause 3.1.1	+85°C
COLD OPERATIONAL	IEC 61850-3 clause 6.9.3.2 IEC 60068-2-1, test Ad	-40°C; 16 hours
	IEEE 1613 clause 3.1.1	-40°C
DRY HEAT STORAGE	IEC 61850-3 clause 6.9.3.3 IEC 60068-2-2, test Bb	+85°C; 16 hours
	IEEE 1613 clause 3.1.2	+85°C
COLD STORAGE	IEC 61850-3 clause 6.9.3.4 IEC 60068-2-1, test Ab	-40°C; 16 hours
	IEEE 1613 clause 3.1.2	-40°C
CHANGE OF TEMPERATURE	IEC 61850-3 clause 6.9.3.5 IEC 60068-2-14 test Nb	-40°C; +85°C 3 hours; 5 cycles

Product Specifications

DESCRIPTION	SPECIFICATION	LEVEL
DAMP HEAT, STEADY STATE	IEC 61850-3 clause 6.9.3.6 IEC 60068-2-78 test Cab	+40°C; 93%, 10 days
DAMP HEAT, CYCLIC	IEC 61850-3 clause 6.9.3.7 IEC 60068-2-30 test Db IEEE 1613 clause 3.1.3	+25°C; 55°C 97%; 93% 6 cycles + 55°C
MECHANICAL ENVIRONMENTAL TESTS		
VIBRATION RESPONSE	IEC 61850-3 clause 6.10.1 IEC 60255-21-1	0.5g, 1 sweep cycle/axis, 3 axis, freq range 10-150Hz
VIBRATION ENDURANCE	IEC 61850-3 clause 6.10.1 IEC 60255-21-1	1g, 20 sweep cycles/axis, 3 axis, freq range 10-150Hz
SHOCK RESPONSE	IEC 61850-3 clause 6.10.2 IEC 60255-21-2	5g, 11ms duration/pulse, 6 pulses/axis, 3 axis.
SHOCK WITHSTAND	IEC 61850-3 clause 6.10.2 IEC 60255-21-2	15g, 11ms duration/pulse, 6 pulses/axis, 3 axis.
BUMP	IEC 61850-3 clause 6.10.2 IEC 60255-21-2	10g, 16ms duration/pulse, 2000 pulses/axis, 3 axis.
SEISMIC (SINGLE AXIS SWEEP)	IEC 61850-3 clause 6.10.3 IEC 60255-21-3	Freq Range: 1-35Hz, Cross-over frequency 8-9Hz, Displacement 3.5mm [x], 1.5mm [y], Acceleration: 1.0g [x], 0.5g [y], Number of sweep cycles per axis 1, number of axis 3
VIBRATION	IEEE 1613 clause 9	V.S.3
SHOCK	IEEE 1613 clause 9	100 mm
ALTITUDE		
ALTITUDE	IEC 61850-3 section 4, table 1	Less than or equal to 2000m
COMMUNICATIONS STANDARD		
INDUSTRIAL COMMUNICATION NETWORKS – HIGH AVAILABILITY AUTOMATION NETWORKS – PART 3	IEC 62439-3	Parallel Redundancy Protocol (PRP) and High-availability Seamless Redundancy (HSR)

Ordering Information

PART #	DESCRIPTION
iRM-2RBX	iMX350/iMX950 hot-swappable line module, supports up to two RedBoxes or a single QuadBox



For more information, visit: is5com.com

toll free: +1-844-520-0588 | fax: +1-289-401-5206 | info@is5com.com

technical support: +1-844-475-8324 | support@is5com.com

5895 Ambler Drive. Mississauga, Ontario. L4W 5B7, Canada