

# iBiome - LLDP User Guide



Intelligent Cyber Secure Platform



Version: 1.10.06-1, Date: January 2022



© 2022 iS5 Communications Inc. All rights reserved.

# Copyright Notice

© 2022 iS5 Communications Inc. All rights reserved.

No Part of this publication may be reproduced in any form without the prior written consent of iS5 Communications Inc. (iS5).

## Trademarks

iS5Com is a registered trademark of iS5. All other trademarks belong to their respective owners.

## Regulatory Compliance Statement

Product(s) associated with this publication complies/comply with all applicable regulations. For more details, refer to the Technical Specifications.

## Warranty

iS5 warrants that all products are free from defects in material and workmanship for a specified warranty period from the invoice date (5 years for most products). iS5 will repair or replace products found to be defective within this warranty period including shipping costs. This warranty does not cover product modifications or repairs done by persons other than iS5-approved personnel, and this warranty does not apply to products that are misused, abused, improperly installed, or damaged by accident. Refer to the Technical Specifications for the actual warranty period(s) of the product(s) associated with this publication. Warranty certificate available at: <https://is5com.com/warranty>

## Disclaimer

Information in this publication is intended to be accurate. iS5 shall not be responsible for its use or infringements on third-parties because of the use of this publication. There may occasionally be unintentional errors on this publication. iS5 reserves the right to revise the contents of this publication without notice.

## Contact Information

iS5 Communications Inc. 5895 Ambler Dr., Mississauga, Ontario, L4W 5B7 Tel: 1+ 905-670-0004 // Fax: 1+ 289-401-5206 Website: <http://www.is5com.com/> Technical Support: E-mail: [support@is5com.com](mailto:support@is5com.com)  
Sales Contact: E-mail: [sales@is5com.com](mailto:sales@is5com.com)

# End User License Agreement (EULA)

## TERMS AND CONDITIONS FOR SOFTWARE PROGRAMS AND EMBEDDED SOFTWARE IN PRODUCTS

### 1) EULA

*All products which consist of or include software (including operating software for hardware supplied by Supplier and software in object code format that is embedded in any hardware) and/or any documentation shall be subject to the End User License Agreement (“EULA”) attached hereto as Exhibit A. Buyer shall be deemed to have agreed to be bound by all of the terms, conditions and obligations therein and shall ensure that all subsequent purchasers and licensees of such products shall be further bound by all of the terms, conditions and obligations therein. For software and/or documentation delivered in connection with these Terms and Conditions, that is not produced by Supplier and which is separately licensed by a third party, Buyer’s rights and responsibilities with respect to such software or documentation shall be governed in accordance with such third party’s applicable software license. Buyer shall, on request, enter into one or more separate “click-accept” license agreements or third party license agreements in respect thereto. Supplier shall have no further obligations with respect to such products beyond delivery thereof. Where Buyer is approved by Supplier to resell products, Buyer shall provide a copy of the EULA and applicable third party license agreements to each end user with delivery of such products and prior to installation of any software. Buyer shall notify Supplier promptly of any breach or suspected breach of the EULA or third party license agreements and shall assist Supplier in efforts to preserve Supplier’s or its supplier’s intellectual property rights including pursuing an action against any breaching third parties. For purposes of these terms and conditions: “software” shall mean scripts, programs, macros, computer programs, application programming and other interfaces, tools and other instructions and sets of instructions for hardware to follow, including SQL and other query languages, hypertext markup language (“html”) and other computer mark-up languages; “hardware” shall mean mainframes, personal computers, servers, client/server stations, network equipment, routers, semi-conductor chips, communication lines and other equipment; and “documentation” shall mean documentation supplied by Supplier relating to the development, use, installation, implementation, integration, configuration, operation, modification, maintenance or support of any software.*

### 2) INTELLECTUAL PROPERTY

*Buyer shall not alter, obscure, remove, cancel or otherwise interfere with any markings (including without limitation any trademarks, logos, trade names, or labelling applied by Supplier). Buyer acknowledges that Supplier is the sole owner of the trademarks used in association with the products and that Buyer has no right, title or interest whatsoever in such trademarks and any goodwill associated therewith and that all goodwill associated with such trademarks is owned by and shall enure exclusively to and for the benefit of Supplier. Further, Buyer shall not represent in any manner that it has acquired any ownership rights in such trademarks or other intellectual property of Supplier. Supplier will defend any claim against Buyer that any iS5Com branded product supplied under these Terms and Conditions infringes third party patents or copyrights (a “Patent Claim”) and will indemnify Buyer against the final judgment entered by a court of competent jurisdiction or any settlements arising out of a Patent Claim, provided that Buyer: (1) promptly notifies Supplier in writing of the Patent Claim; and (2) cooperates with Supplier in the defence of the Patent Claim, and grants Supplier full and exclusive control of the defence and settlement of the Patent Claim and any subse-*

quent appeal. If a Patent Claim is made or appears likely, Buyer agrees to permit Supplier to procure for Buyer the right to continue using the affected product, or to replace or modify the product with one that is at least functionally equivalent. If Supplier determines that none of those alternatives is reasonably available, then Buyer will return the product and Supplier will refund Buyer's remaining net book value of the product calculated according to generally accepted accounting principles. Supplier has no obligation for any Patent Claim related to: (1) compliance with any designs, specifications, or instructions provided by Buyer or a third party on Buyer's behalf; (2) modification of a product by Buyer or a third party; (3) the amount or duration of use which Buyer makes of the product, revenue earned by Buyer from services it provides that use the product, or services offered by Buyer to external or internal Buyers; (4) combination, operation or use of a product with non-Supplier products, software or business processes; or (5) use of any product in any country other than the country or countries specifically authorized by Supplier.

### 3) **EXPORT CONTROLS AND SANCTIONS**

- a) In these Term and Conditions, "**Export Controls and Sanctions**" means the export control and sanctions laws of each of Canada, the US and any other applicable country, territory or jurisdiction including the United Nations, European Union and the United Kingdom, and any regulations, orders, guides, rules, policies, notices, determinations or judgements issued thereunder or imposed thereby.
- b) Supplier products, documentation and services provided under these Terms and Conditions may be subject to Canadian, U.S. and other country Export Controls and Sanctions. Buyer shall accept and comply with all applicable Export Control and Sanctions in effect and as amended from time to time pertaining to the export, re-export and transfer of Supplier's products, documentation and services. Buyer also acknowledges and agrees that the export, re-export or transfer of Supplier products, documentation and services contrary to applicable Export Controls and Sanctions may be a criminal offence.
- c) For greater certainty, Buyer agrees that (i) it will not directly or indirectly export, re-export or transfer Supplier products, documentation and services provided under these Terms and Conditions to any individual or entity in violation of any aforementioned Export Controls and Sanctions; (ii) it will not directly or indirectly export, re-export or transfer any such products, documentation and services to any country or region of any country that is prohibited by any applicable Export Controls and Sanctions or for any of the following end-uses, or in any of the following forms unless expressly authorized by any applicable government permit issued under or otherwise expressly permitted by applicable Export Controls and Sanctions:
  - i) For use that is directly or indirectly related to the research, design, handling, storage, operation, detection, identification, maintenance, development, manufacture, production or dissemination of chemical, biological or nuclear weapons, or any missile or other delivery systems for such weapons, space launch vehicles, sounding rockets or unmanned air vehicle systems;
  - ii) Technical information relating to the design, development or implementation of the cryptographic components, modules, interfaces, or architecture of any software; or
  - iii) Source code or pseudo-code, in any form, of any of the cryptographic components, modules, or interfaces of any software.
- d) Buyer confirms that it is not (i) listed as a sanctioned person or entity under any Export Controls and Sanctions list of designated persons, denied persons or specially designated

nationals maintained by the Canadian Department of Foreign Affairs, Trade and Development, the Canadian Department of Public Safety and Emergency Preparedness, the U.S. Office of Foreign Assets Control of the U.S. Department of the Treasury, the U.S. Department of State, the U.S. Department of Commerce, United Nations Security Council, the European Union or any EU member state, HM's Treasury, or any other department or agency of any of the aforementioned countries or territories, or the United Nations or any other country's sanctions-related list; (ii) owned or controlled by such person or entity; or (iii) acting in any capacity on behalf of or for the benefit of such person or entity. Buyer also confirms that this applies equally to any of its affiliates, joint venture partners, subsidiaries and to the best of Buyer's knowledge, any of its agents or representatives.

## Exhibit A: End User License Agreement

IMPORTANT – READ CAREFULLY: i5Com Communications Inc. ("**i5Com**") licenses the i5Com Materials (as defined below) subject to the terms and conditions of this end user license agreement (the "**EULA**"). BY SELECTING "ACCEPT" OR OTHERWISE EXPRESSLY AGREEING TO THIS EULA, BY DOWNLOADING, INSTALLING OR USING THE SOFTWARE, OR BY USING THE HARDWARE (AS DEFINED BELOW), ALL OF THE TERMS AND CONDITIONS CONTAINED IN THIS EULA BECOME LEGALLY BINDING ON THE CUSTOMER. This End User License Agreement (the "**EULA**") supplements the Terms and Conditions or such other terms and conditions between i5Com or, if applicable, a reseller for i5Com, and the Customer (as defined below) (in either case, the "**Contract**").

### 1) DEFINITIONS

*"**Confidential Information**" means all data and information relating to the business and management of i5Com, including i5Com Materials, trade secrets, technology and records to which access is obtained hereunder by the Customer, and any materials provided by i5Com to the Customer, but does not include any data or information which: (a) is or becomes publicly available through no fault of the Customer; (b) is already in the rightful possession of the Customer prior to its receipt from i5Com; (c) is already known to the Customer at the time of its disclosure to the Customer by i5Com and is not the subject of an obligation of confidence of any kind; (d) is independently developed by the Customer; (e) is rightfully obtained by the Customer from a third party; (e) is disclosed with the written consent of i5Com; or (f) is disclosed pursuant to court order or other legal compulsion.*

- "**Customer**" means the licensee of the i5Com Software pursuant to the Contract.
- "**i5Com Documentation**" means Documentation supplied by or on behalf of i5Com under the Contract relating to the development, use, installation, implementation, integration, configuration, operation, modification, maintenance or support of i5Com Software, or i5Com Firmware.
- "**i5Com Firmware**" means i5Com Software in object code format that is embedded in i5Com Hardware.
- "**i5Com Hardware**" means Hardware supplied by or on behalf of i5Com under the Contract.
- "**i5Com Materials**" means, collectively, the i5Com Software and the i5Com Documentation.

- **“i5Com Software”** means Software supplied by or on behalf of i5Com under the Contract. For greater certainty, i5Com Software shall include all operating Software for i5Com Hardware, and i5Com Firmware.
- **“Documentation”** means written instructions and manuals of a technical nature.
- **“EULA”** means this End User License Agreement.
- **“Hardware”** means hardware, mainframes, personal computers, servers, client/server stations, network equipment, routers, semi-conductor chips, communication lines and other equipment.
- **“Intellectual Property Rights”** means any and all proprietary rights provided under: (i) patent law; (ii) copyright law (including moral rights); (iii) trade-mark law; (iv) design patent or industrial design law; (v) semi-conductor chip or mask work law; or (vi) any other statutory provision or common law principle applicable to this EULA, including trade secret law, which may provide a right in either Hardware, Software, Documentation, Confidential Information, ideas, formulae, algorithms, concepts, inventions, processes or know-how generally, or the expression or use of such Hardware, Software, Documentation, Confidential Information, ideas, formulae, algorithms, concepts, inventions, processes or know-how trade secret law; any and all applications, registrations, licenses, sub-licenses, franchises, agreements or any other evidence of a right in any of the foregoing; and all licenses and waivers and benefits of waivers of the intellectual property rights set out herein, all future income and proceeds from the intellectual property rights set out herein, and all rights to damages and profits by reason of the infringement of any of the intellectual property rights set out herein.
- **“Software”** means scripts, programs, macros, computer programs, application programming and other interfaces, tools and other instructions and sets of instructions for hardware to follow, including SQL and other query languages, hypertext markup language (“html”) and other computer mark-up languages.
- **“Third Party License Terms”** means additional terms and conditions that are applicable to Third Party Software.
- **“Third Party Software”** means Software owned by any third party, licensed to i5Com and sublicensed to the Customer.
- **“Update”** means a supplemented or revised version of i5Com Software which rectifies bugs or makes minor changes or additions to the functionality of i5Com Software and is designated by i5Com as a higher release number from, for example, 6.06 to 6.07 or 6.1 to 6.2.

## 2) LICENSE

### – 2.1 License Grant

*The i5Com hereby grants to the Customer, subject to any Third Party License Terms, a non-exclusive, non-transferable, non-sublicensable right and licence to use i5Com Materials solely in object code format, solely for the Customer’s own business purposes, solely in accordance with this EULA (including, for greater certainty, subject to Section 6.1 of this EULA) and the applicable i5Com Documentation, and, in the case of i5Com Firmware, solely on i5Com Hardware on which i5Com Firmware was installed, provided that Customer may only install i5Com Software on such number of nodes expressly set out in the Contract.*

### – 2.2 License Restrictions

*Except as otherwise provided in Section 2.1 above, the Customer shall not: (a) copy i55Com Materials for any purpose, except for the sole purpose of making an archival or back-up copy; (b) modify, translate or adapt the i55Com Materials, or create derivative works based upon all or part of such i55Com Materials; (c) assign, transfer, loan, lease, distribute, export, transmit, or sublicense i55Com Materials to any other party; (d) use i55Com Materials for service bureau, rent, timeshare or similar purposes; (e) decompile, disassemble, decrypt, extract, or otherwise reverse engineer, as applicable, i55Com Software or i55Com Hardware; (f) use i55Com Materials in a manner that uses or discloses the Confidential Information of i55Com or a third party without the authorization of such person; (g) permit third parties to use i55Com Materials in any way that would constitute breach of this EULA; or (h) otherwise use i55Com Materials except as expressly authorized herein.*

– **2.3 Updates and Upgrades**

*The license granted hereunder shall apply to the latest version of i55Com Materials provided to the Customer as of the effective date of this EULA, and shall apply to any Updates and Upgrades subsequently provided to the Customer by i55Com pursuant to the terms of this EULA. Customer shall only be provided with Updates and/or Upgrades if expressly set out in the Contract.*

– **2.4 Versions**

*In the event any Update or Upgrade includes an amended version of this EULA, Customer will be required to agree to such amended version in order to use the applicable i55Com Materials and such amended EULA shall be deemed to amend the previously effective version of the EULA.*

– **2.5 Third Party Software**

*Customer shall comply with any Third Party License Terms.*

3) **OWNERSHIP**

– **3.1 Intellectual Property**

*Notwithstanding any other provision of the Contract, i55Com and the Customer agree that i55Com is and shall be the owner of all Intellectual Property Rights in i55Com Materials and all related modifications, enhancements, improvements and upgrades thereto, and that no proprietary interests or title in or to the intellectual property in i55Com Materials is transferred to the Customer by this EULA. i55Com reserves all rights not expressly granted to the Customer under Section 2.1.*

– **3.2 Firmware**

*i55Com and the Customer agree that any and all i55Com Firmware in or forming a part of i55Com Hardware is being licensed and not sold, and that the words “purchase,” “sell” or similar or derivative words are understood and agreed to mean “license,” and that the word “Customer” as used herein are understood and agreed to mean “licensee,” in each case in connection with i55Com Firmware.*

– **3.3 Third Party Software**

*Certain of i55Com Software provided by i55Com may be Third Party Software owned by one or more third parties and sublicensed to the Customer. Such third parties retain ownership of and title to such Third Party Software, and may directly enforce the Customer’s obligations hereunder in order to protect their respective interests in such Third Party Software.*

4) **CONFIDENTIALITY**

– **4.1 Confidentiality**

*The Customer acknowledges that i55Com Materials contain Confidential Information of i55Com and that disclosure of such Confidential Information to any third party could cause great loss to i55Com. The Customer agrees to limit access to i55Com Materials to those employees or officers of the Customer who require access to use i55Com Materials as permitted by the Contract and this EULA and shall ensure that such employees or officers keep the Confidential Information confidential and do not use it otherwise than in accordance with the Contract and this EULA. The obligations set out in this Section 4 shall continue notwithstanding the termination of the Contract or this EULA and shall only cease to apply with respect to such part of the Confidential Information as is in, or passes into, the public domain (other than in connection with the Customer's breach of this EULA) or as the Customer can demonstrate was disclosed to it by a third person who did not obtain such information directly or indirectly from i55Com.*

– **4.2 Irreparable Harm**

*Without limiting any other rights or remedies available to i55Com in law or in equity, the Customer acknowledges and agrees that the breach by Customer of any of the provisions of this EULA would cause serious and irreparable harm to i55Com which could not adequately be compensated for in damages and, in the event of a breach by the Customer of any of such provisions, the Customer hereby consents to an injunction against it restraining it from any further breach of such provisions.*

– **4.3 Security**

*Any usernames, passwords and/or license keys ("**Credentials**") provided to you by i55Com shall be maintained by the Customer and its representatives in strict confidence and shall not be communicated to or used by any other persons. THE CUSTOMER SHALL BE RESPONSIBLE FOR ALL USE OF CREDENTIALS, REGARDLESS OF THE IDENTITY OF THE PERSON(S) MAKING SUCH USE, AND WITHOUT LIMITING THE GENERALITY OF THE FOREGOING, IS5COM SHALL HAVE NO RESPONSIBILITY OR LIABILITY IN CONNECTION WITH ANY UNAUTHORIZED USE OF CREDENTIALS.*

5) **LIMITATION OF LIABILITY**

– **5.1 Disclaimer**

*EXCEPT FOR THE EXPRESS WARRANTIES MADE BY IS5COM IN THE CONTRACT, (A) IS5COM MAKES NO AND HEREBY EXPRESSLY DISCLAIMS, AND THE PARTIES HERETO HEREBY EXPRESSLY WAIVE AND EXCLUDE TO THE FULLEST EXTENT PERMITTED BY APPLICABLE LAWS, AND THE CUSTOMER AGREES NOT TO SEEK OR CLAIM ANY BENEFIT THEREOF, IN EACH CASE, ALL WARRANTIES, CONDITIONS, REPRESENTATIONS OR INDUCEMENTS (AND THERE ARE NO OTHER WARRANTIES, CONDITIONS, REPRESENTATIONS OR INDUCEMENTS, ORAL OR WRITTEN, EXPRESS OR IMPLIED, STATUTORY OR OTHERWISE, OF ANY KIND WHATSOEVER SET OUT HEREIN) WITH RESPECT TO THE IS5COM MATERIALS, INCLUDING AS TO THEIR MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, DESIGN OR CONDITION, COMPLIANCE WITH THE REQUIREMENTS OF ANY APPLICABLE LAWS, CONTRACT OR SPECIFICATION, NON- INFRINGEMENT OF THE RIGHTS OF OTHERS, ABSENCE OF LATENT DEFECTS, OR AS TO THE ABILITY OF THE IS5COM MATERIALS TO MEET CUSTOMER'S REQUIREMENTS OR TO OPERATE OF ERROR*



FREE; AND (B) THE IS5COM MATERIALS ARE PROVIDED “**AS IS**” WITHOUT WARRANTY OR CONDITION OF ANY KIND.

– **5.2 Limitation of Liability**

*EXCEPT AS EXPRESSLY PROVIDED IN THE CONTRACT, IN NO EVENT SHALL IS5COM BE LIABLE TO THE CUSTOMER OR ANY THIRD PARTY FOR ANY DIRECT, INDIRECT, SPECIAL OR CONSEQUENTIAL DAMAGES ARISING UNDER OR IN CONNECTION WITH THIS EULA EVEN IF ADVISED OF THE POSSIBILITY THEREOF. THIS LIMITATION SHALL APPLY IRRESPECTIVE OF THE NATURE OF THE CAUSE OF ACTION, DEMAND OR CLAIM, INCLUDING BREACH OF CONTRACT, NEGLIGENCE, TORT OR ANY OTHER LEGAL THEORY, AND SHALL SURVIVE A FUNDAMENTAL BREACH OR BREACHES AND/OR FAILURE OF THE ESSENTIAL PURPOSE OF THIS EULA.*

6) **TERM**

– **6.1 Term**

*Customer’s right to use i55Com Materials shall terminate at such time as set out in the Contract or upon termination or expiration of the Contract, in each case at which time this EULA shall be deemed to terminate.*

– **6.2 Survival**

*Each of Sections 1, 2.4, 3, 4, 5, 6.2, and 7 shall survive termination of the EULA.*

7) **MISCELLANEOUS**

– **7.1 Miscellaneous**

*This EULA is (together with, as applicable, any click-wrap license agreement or Third Party License Terms pertaining to the use of i55Com Materials) the entire agreement between the Customer and i55Com pertaining to the Customer’s right to access and use i55Com Materials, and supersedes all prior or collateral oral or written representations or agreements related thereto. Notwithstanding anything to the contrary contained in the Contract, to the extent of any inconsistency between this EULA and the Contract, or any such applicable click-wrap agreement, this EULA shall take precedence over the Contract and such click-wrap agreement. In the event that one or more of the provisions is found to be illegal or unenforceable, this EULA shall not be rendered inoperative but the remaining provisions shall continue in full force and effect. The parties expressly disclaim the application of the United Nations Convention for the International Sale of Goods. This EULA shall be governed by the laws of the Province of Ontario, Canada, and federal laws of Canada applicable therein. In giving effect to this EULA, neither party will be or be deemed an agent of the other for any purpose and their relationship in law to the other will be that of independent contractors. Any waiver of any terms or conditions of this EULA: (a) will be effective only if in writing and signed by the party granting such waiver, and (b) shall be effective only in the specific instance and for the specific purpose for which it has been given and shall not be deemed or constitute a waiver of any other provisions (whether or not similar) nor shall such waiver constitute a continuing waiver unless otherwise expressly provided. The failure of either party to exercise, and any delay in exercising, any of its rights hereunder, in whole or in part, shall not constitute or be deemed a waiver or forfeiture of such rights, neither in the specific instance nor on a continuing basis. No single or partial exercise of any such right shall preclude any other or further exercise of such right or the exercise of any other right. Customer shall not assign or transfer this EULA or any of its rights or obligations hereunder, in whole or in part, without the prior written consent of*

*iS5Com. The division of this EULA into sections and the insertion of headings are for convenience of reference only and shall not affect the construction or interpretation of this EULA. References herein to Sections are to sections of this Agreement. Where the word “include”, “includes” or “including” is used in this EULA, it means “include”, “includes” or “including”, in each case, “without limitation”. All remedies provided for iS5Com under this EULA are non-exclusive and are in addition, and without prejudice, to any other rights as may be available to of iS5Com, whether in law or equity. By electing to pursue a remedy, of iS5Com does not waive its right to pursue any other available remedies. The parties acknowledge that they have required this Agreement to be written in English. Les parties aux présentes reconnaissent qu’elles ont exigé que la présente entente soit rédigée en anglais.*

– **7.2 Subject to Change**

*Terms and Conditions are subject to change. For the latest information please visit:*  
<https://is5com.com/terms-and-conditions/>

---

# GLOSSARY ENTRIES

## **802.1D**

IEEE 802.1D is the Ethernet MAC bridges standard which includes Bridging, Spanning Tree and others. It is standardized by the IEEE 802.1 working group. It includes details specific to linking many of the other 802 projects including the widely deployed 802.3 (Ethernet), 802.11 (Wireless LAN) and 802.16 (WiMax) standards.

Bridges using virtual LANs (VLANs) have never been part of 802.1D, but were instead specified in separate standard, 802.1Q originally published in 1998.

By 2014, all the functionality defined by IEEE 802.1D has been incorporated into either IEEE 802.1Q (Bridges and Bridged Networks) or IEEE 802.1AC (MAC Service Definition).

## **802.1Q**

IEEE 802.1Q, often referred to as DOT1Q or 1Q, is the networking standard that supports virtual LANs (VLANs) on an IEEE 802.3 Ethernet network. It is the most widely used encapsulation method for VLAN tagging.

## **802.1X**

IEEE 802.1X is an IEEE Standard for port-based Network Access Control (PNAC). 802.1X authentication requires a client, an authenticator, and an authentication server. The client is a device that wants to connect to the network.

## **802.1W**

IEEE 802.1W feature provides rapid traffic reconvergence for point-to-point links within a few milliseconds (0-500 milliseconds), following the failure of bridge or bridge point. This reconvergence occurs more rapidly than the reconvergence provided by the 802.1F spanning Tree Protocol (STP) or by RSTP.

## **AAA**

Authentication, Authorization and Accounting (AAA) functionalities. AAA are provided by TACACS+. TACACS+ is used because it provides independently separate and modular authentication, authorization, and accounting (AAA) facilities achieved by a single access control server (the TACACS+ daemon).

## **AARP**

AppleTalk Address Resolution Protocol (AARP). The AARP maps computers' physical hardware addresses to their temporarily assigned AppleTalk network addresses. AARP is functionally equivalent to Address Resolution Protocol (ARP). The AARP table permits management of the address mapping table on the managed device. This protocol allows Apple computers' AppleTalk hosts to generate their own network addresses

## **ABR**

Area Border Router (ABR)

## **ACK**

ACK stands for acknowledgment. ACK is one of the TCP flags.

---

TCP flags are various types of flag bits present in the TCP header. Each of them has its own significance. They initiate connections, carry data, and tear down connections. The commonly used TCP flags are SYN, ACK, RST, FIN, URG, PSH.

- SYN (synchronize): Packets that are used to initiate a connection.
- ACK (acknowledgment): Packets that are used to confirm that the data packets have been received, also used to confirm the initiation request and tear down requests.
- RST (reset): Signify the connection is down or maybe the service is not accepting the requests.
- FIN (finish): Indicate that the connection is being torn down. Both the sender and receiver send the FIN packets to gracefully terminate the connection.
- PSH (push): Indicate that the incoming data should be passed on directly to the application instead of getting buffered.
- URG (urgent): Indicate that the data that the packet is carrying should be processed immediately by the TCP stack

### **ACL**

An access-control list (ACL) is a list of permissions associated with a system resource (object). An ACL specifies which users or system processes are granted access to objects, as well as what operations are allowed on given objects. Each entry in a typical ACL specifies a subject and an operation. For instance, if a file object has an ACL that contains (Admin: read, write; guest 1: read), this would give Admin permission to read and write the file, and only give guest 1 permission to read it.

### **AES**

The Advanced Encryption Standard (AES) is a symmetric-key block cipher algorithm and U.S. government standard for secure and classified data encryption and decryption.

### **ARAP**

Apple Remote Access Protocol (ARAP); the Apple Remote Access Protocol (ARAP) sends traffic based on the AppleTalk protocol across PPP links and ISDN switched-circuit networks. ARAP is still pervasive in the Apple market, although the company is attempting to transition into an Apple-specific TCP stack for use over a PPP link.

### **ARP**

ARP (Address Resolution Protocol). The ARP is a communication protocol used for discovering the link layer address, such as a MAC address, associated with a given Internet layer address, typically an IPv4 address.

### **AS**

Autonomous System (AS)

### **ASBR**

Autonomous Border System Router (ASBR)

### **BDR**

BDR stands for Backup Designated Router.

### **BFD**

Bidirectional Forwarding Detection (BFD) is a super fast protocol that is able to detect link failures within milliseconds or even microseconds. BFD runs independent from any other (routing) protocols. Once it's up and running, you can configure protocols like OSPF, EIGRP, BGP, HSRP, MPLS LDP

---

etc. to use BFD for link failure detection instead of their own mechanisms. When the link fails, BFD will inform the protocol

### **BIDIR-PIM**

Bi-directional Sparse Mode (PIM-SM); Derived from PIM-SM, BIDIR-PIM builds and maintains a bidirectional RPT, which is rooted at the RP and connects the multicast sources and the receivers. Along the bidirectional RPT, the multicast sources send multicast data to the RP, and the RP forwards the data to the receivers. Each router along the bidirectional RPT needs to maintain only one (\*, G) entry, saving system resources.

Another difference between PIM sparse mode and PIM bidirectional mode is that with sparse mode traffic only flows down the shared tree. Using PIM bidirectional mode, traffic will flow up and down the shared tree. When the multicast packets arrive at the RP, they will be forwarded down the shared tree (if there are receivers) or dropped (when we don't have receivers).

### **BMS**

Best Master Clock (BMS); The ordinary clock executes the port state machine and BMC (Best Master Clock) algorithm to select the *PTP* port state.

### **BOOTP**

The Bootstrap Protocol (BOOTP) is a computer networking protocol used in Internet Protocol networks to automatically assign an IP address to network devices from a configuration server. The BOOTP was originally defined in RFC 951.

### **BPDU**

Bridge Protocol Data Units (BPDUs) are frames that contain information about the spanning tree protocol (STP). A switch sends BPDUs using a unique source MAC address from its origin port to a multicast address.

There are two kinds of BPDUs for 802.1D Spanning Tree:[

- Configuration BPDU, sent by root bridges to provide information to all switches.
- TCN (Topology Change Notification), sent by bridges towards the root bridge to notify changes in the topology, such as port up or port down.

### **BPS**

BPS (Bits-per-second)

### **BR**

Border Router (BR)

### **BSD**

Berkeley Software Distribution (BSD)


### **BSR**

The bootstrap router (BSR) ensures that all routers in the PIM domain have the same RP cache as the BSR. You can configure the BSR to help you select an RP set from BSR candidate RPs. The function of the BSR is to broadcast the RP set to all routers in the domain. You select one or more candidate BSRs to manage the RPs in the domain. Only one candidate BSR is elected as the BSR for the domain.

This figure shows the BSR mechanism. Router A, the software-elected BSR, sends BSR messages out all enabled interfaces (shown by the solid lines in the figure). The messages, which contain the RP set, are flooded hop by hop to all routers in the network. Routers B and C are candidate RPs that

send their candidate-RP advertisements directly to the elected BSR (shown by the dashed lines in the figure).

The elected BSR receives candidate-RP messages from all the candidate RPs in the domain. The bootstrap message sent by the BSR includes information about all of the candidate RPs. Each router uses a common algorithm to select the same RP address for a given multicast group.

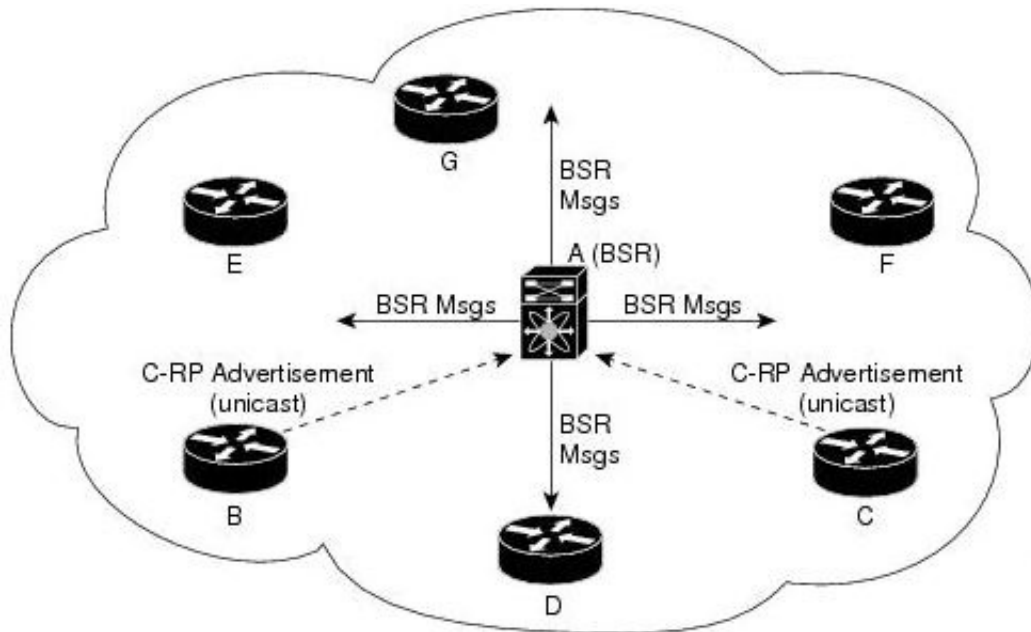

#### CA

Certificate Authorization (CA)

#### CBP

Customer Backbone Port (CBP)

#### CBS

Committed burst size (CBS). During periods of average traffic rates below the Committed information rate (CIR), any unused bandwidth capacity accumulates up to a maximum amount defined by the CBS. Short periods of bursting traffic (back-to-back traffic at averages rates that exceed the CIR) are also categorized as green provided that unused bandwidth capacity is available.

#### CEP

Customer Edge Port (CEP). The Customer Edge Port (CEP) and each Provider Edge Port are treated as separate Bridge Ports by the spanning tree protocol. If the C-VLAN component connects to the S-VLAN component with a single Provider Edge Port, and the associated service instance supports no more than two customer interfaces, then all frames (including Spanning Tree BPDUs) addressed to the Bridge Group Address may be relayed between the two Ports of the C-VLAN component without modification. Otherwise, the Spanning Tree Protocol Entity shall execute the Rapid Spanning Tree Protocol (RSTP, Clause 17 of IEEE Std 802.1D), as modified by the provisions of this subclause.

#### CFI

Canonical Format Identifier (CFI). If Drop Eligible Indicator (DEI) bit is enabled in 802.1ad header or has Canonical Format Identifier (CFI) bit enabled in 802.1q header on an arriving packet, such packets will be dropped using QoS.

---

**MS-CHAP**

CHAP stands for Challenge Handshake Authentication Protocol. MS-CHAP is the Microsoft version of the Challenge-Handshake Authentication Protocol, CHAP. The protocol exists in two versions, MS-CHAPv1 (defined in RFC 2433) and MS-CHAPv2 (defined in RFC 2759). MS-CHAPv2 provides mutual authentication between peers by piggybacking a peer challenge on the Response packet and an authenticator response on the Success packet.

**CIDR**

Classless Inter Domain Routing (CIDR).

**CIR**

Committed information rate (CIR) is defines the guaranteed bandwidth for traffic arriving at or departing from the interface under normal line conditions.

**CIST**

The Common and Internal Spanning Tree (CIST) is a collection of the ISTs in each MST region.

**CLI**

Command line interface (CLI) is a text-based interface that is used to operate software and operating systems while allowing the user to respond to visual prompts by typing single commands into the interface and receiving a reply in the same way

**CLKIWF**

CLKIWF is short for Clock InterWorking Function.

**CoS**

Output queue scheduling defines the class-of-service (CoS) properties of output queues. Based on certain types of traffic are preferred. The level of service is determined by the egress port queue to which the traffic is assigned. When traffic is queued for transmission, the rate at which it is serviced depends on how the queue is configured and possibly the amount of traffic present in other queues for that port.

Some traffic is classified for service (i.e., packet marking) before it arrives at the switch. If you decide to use these classifications, you can map this traffic to egress queues by setting the CoS in the Queue table.

**CPLD**

A Complex Programmable logic device (CPLD) is a logic device with completely programmable AND/OR arrays and macrocells. Macrocells are the main building blocks of a CPLD, which contain complex logic operations and logic for implementing disjunctive normal form expressions. AND/OR arrays are completely reprogrammable and responsible for performing various logic functions.

**CPU**

The central processing unit (CPU) is the primary component of a computer that processes instructions. It runs the operating system and applications, constantly receiving input from the user or active software programs. It processes the data and produces output.

**CRT**

CRT stands for "Internet security certificate.

**CSR**

Certificate Signing Request (CSR)

---

**CST**

common spanning tree (CST); The common spanning tree (CST) that interconnects the MST regions and single spanning trees

**CTS**

CTS stands for Clear to Send. Request to Send (RTS)/CTS Flow Control is another flow control mechanism that is part of the RS232 standard.

**CVID**

The C-VID registration table is as follows:

**Table 1:** C-VID registration table

<b>C-VID Registration Table</b>	<b>Description</b>
Cvid value	The value of the Customer VLAN id on the Customer edge port. (Table key)
Svid Value	The S-VLAN tag. Auto creates an S-VLAN component and the CNP and PNP and links the PEP of the C-VLAN component to the CNP.
Untagged-pep	A boolean indicating frames for this C-VLAN should be forwarded untagged through the Provider Edge Port (PEP).
Untagged-cep	A boolean indicating frames for this C-VLAN should be forwarded untagged through the Customer Edge Port (CEP).

**CVLAN**

Set of ports & inner VLANs (CVLAN); or C-VLAN or Customer Bridge (CB)

**DB9**

DB9 refers to a common connector type from the D-Subminiatures (D-Sub) connector family, which when introduced, was among the smallest connectors used on computer systems. DB9 houses 9 pins (for the male connector) or 9 holes (for the female connector). DB9 connectors were once very common on PCs and servers. Today, the DB9 has mostly been replaced by more modern interfaces such as USB, PS/2, Firewire, and others.

**DB25**

The DB25 connector is an analog socket, with 25 pins, from the D-Subminiatures (D-Sub) connector family. The prefix “D” represents the D-shape of the connector shell. The DB25 connector is mainly used in serial and parallel ports, allowing asynchronous data transmission according to the RS-232 standard (RS-232C).

**DCD**

DCD stands Data Carrier Detect. The description is modem connected to another.

**DEC**

Digital Equipment Corporation (DEC)



---

**DEI**

Drop Eligible Indicator (DEI). If DEI bit is enabled in 802.1ad header or has Canonical Format Identifier (CFI) bit enabled in 802.1q header on an arriving packet, such packets will be dropped using QoS.

**DES**

The Advanced Encryption Standard (AES) is a symmetric-key block cipher algorithm and U.S. government standard for secure and classified data encryption and decryption.

**DF**

Designated Forwarder (DF).

**DHCP**

Dynamic Host Configuration Protocol (DHCP)

**DITA**

Darwin Information Typing Architecture (DITA); the DITA specification defines a set of document types for authoring and organizing topic-oriented information, as well as a set of mechanisms for combining, extending, and constraining document types.

**D-LAG**

Distributed Link Aggregation (D-LAG or DLAG)

**DLF**

The Destination Lookup Failure (DLF). When a packet arrives at the device and the device doesn't have an entry for the destination MAC address in its MAC address table, the packet is classified as a Destination Lookup Failure (DLF)

**DM**

DM stands for Dense Mode. Protocol-Independent Multicast Dense Mode (PIM-DM) uses dense multicast routing.

**DNAT**

Destination network address translation (DNAT) is a technique for transparently changing the destination IP address of an end route packet and performing the inverse function for any replies.

**DNS**

Domain Name System

**DOT1Q**

IEEE 802.1Q, often referred to as DOT1Q or 1Q, is the networking standard that supports virtual LANs (VLANs) on an IEEE 802.3 Ethernet network. It is the most widely used encapsulation method for VLAN tagging.

**Dot1x**


Dot1x Authentication is enabled when dot1x system-auth-control is enabled, and aaa authentication dot1x default is local. If you enable authentication on a port by using the default setting of dot1x port-control, which is force-authorized, it disables 802.1X authentication and causes the port to transition to the authorized state without any authentication exchange required. The port transmits and receives normal traffic without 802.1X-based authentication of the client

**DR**

The Designated Router (DR) is the router that will forward the PIM join message from the receiver to the RP (rendezvous point).


**DS**

Differentiated Services (DS).

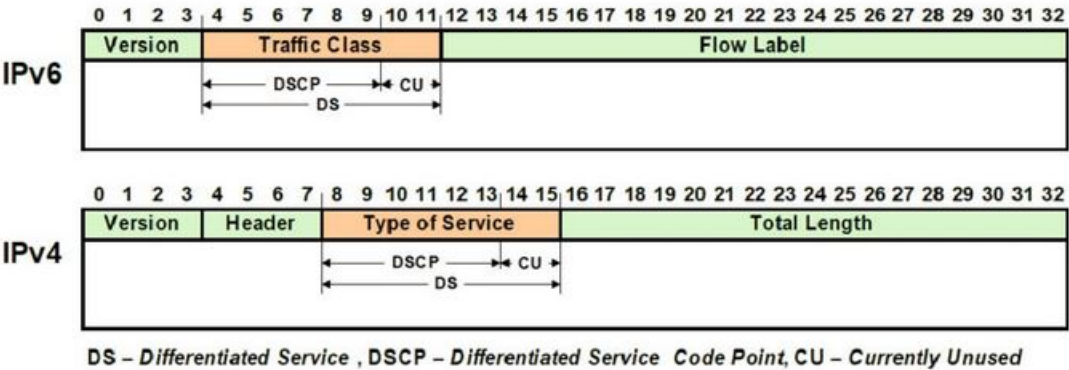

**DSCP**

A Differentiated Services Code Point (DSCP) is a packet header value that can be used to request (for example) high priority or best effort delivery for traffic.

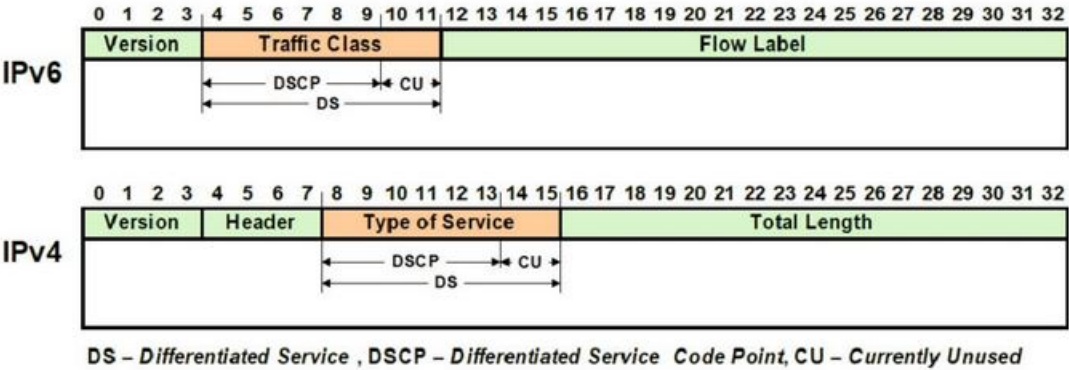

**DSR**

DSR stands Data Set Ready. The description is ready to communicate.

**DST**

Daylight Saving Time (DST) is a system of setting clocks ahead so that both sunrise and sunset occur at a later hour. The effect is additional daylight in the evening. Many countries observe DST, although most have their own rules and regulations for when it begins and ends. The dates of DST may change from year to year

**DTR**

DTR stands Data Terminal Ready. The description is ready to communicate.

**DUT**

Device under Test (DUT)

**DVMRP**

Distance Vector Multicast Routing Protocol (DVMRP)

**E2E**

End-to-end (E2E) transparent clock for Precision Time Protocol (PTP). With an E2Etransparent clock, only the residence time is included in the timestamp in the packet.

---

## **EAP**

Extensible Authentication Protocol (EAP) is an authentication framework frequently used in network and Internet connections. EAP is usually tunnelled over RADIUS between the Authenticator and the Authentication Server. 802.1x uses EAP.

EAP is an authentication framework, not a specific authentication mechanism. Commonly used modern methods capable of operating in wireless networks include EAP-TLS, EAP-SIM, EAP-AKA, LEAP and EAP-TTLS. Requirements for EAP methods used in wireless LAN authentication are described in RFC 4017.

The Lightweight Extensible Authentication Protocol (LEAP) method was developed by Cisco Systems prior to the IEEE ratification of the 802.11i security standard.

## **EAPOL**

Extensible Authentication Protocol (EAP) over LAN (EAPoL) is used between the Supplicant (software on your laptop) and the Authenticator (switch)

## **EBS**

The Excess Burst size (EBS) specifies how much data above the committed burst size (CBS) a user can transmit. The EBS is the size up to which the traffic is allowed to burst without being discarded. EBS allows for moderate periods of bursting traffic that exceeds both the committed information rate (CIR) and the committed burst size (CBS).

## **ECN**

Explicit Congestion Notification (ECN)

## **EGP**

Exterior Gateway Protocol (EGP) is a defunct routing protocol used in autonomous systems to exchange data between surrounding gateway sites. Border Gateway Protocol (BGP) supplanted EGP, widely utilized by research institutes, universities, government agencies, and commercial companies (BGP). EGP is built on poll instructions to request update answers and periodic message exchange polling for neighbor reachability.

## **EIR**

The excess information rate (EIR) specifies the rate above the CIR (committed information rate) at which traffic is allowed into the network and that may get delivered if the network is not congested. The EIR has an additional parameter associated with it called the excess burst size (EBS). The EBS is the size up to which the traffic is allowed to burst without being discarded.

## **ESD**

ElectroStatic Discharge (ESD) is the sudden flow of electricity between two electrically charged objects caused by contact, an electrical short or dielectric breakdown. A buildup of static electricity can be caused by tribocharging or by electrostatic induction. The ESD occurs when differently-charged objects are brought close together or when the dielectric between them breaks down, often creating a visible spark.

## **EXEC**

exec: Protocol

Commands that are invoked using the exec: protocol must be executable as standalone commands. Commands that are built into a command interpreter or other program cannot be executed directly, but must be executed (if possible) within the context of the application that provides them. For example, the following seed URL would not work on Microsoft Windows systems because the dir command is built into the Windows command interpreter (cmd.exe):

---

*exec: dir e:\data*

To use the exec protocol with commands that are built into the Windows command interpreter, you must do something as the following:

*exec: cmd /c dir 'e:\data'*

#### **EVB**

Edge Virtual Bridge (EVB) is an IEEE standard that involves the interaction between virtual switching environments in a hypervisor and the first layer of the physical switching infrastructure. The EVB enhancements are following 2 different paths – 802.1qbg and 802.1qbh.

#### **EVC**

Ethernet Virtual Connection (EVC).

#### **FCS**

A frame check sequence (FCS) is an error-detecting code added to a frame in a communication protocol. Frames are used to send payload data from a source to a destination.

#### **FDB**

Forwarding Database (FDB)

#### **FID**

Filtering ID (FID)

#### **FHRP**

First Hop Redundancy Protocol (FHRP)

#### **FPGA**

The Field Programmable Gate Array (FPGA) is a programmable logic device that can have its internal configuration set by the firmware.

#### **FTP**

The File Transfer Protocol (FTP) is a standard communication protocol used for the transfer of computer files from a server to a client on a computer network. FTP is built on a client–server model architecture using separate control and data connections between the client and the server.[1] FTP users may authenticate themselves with a clear-text sign-in protocol, normally in the form of a username and password, but can connect anonymously if the server is configured to allow it. For secure transmission that protects the username and password, and encrypts the content, FTP is often secured with SSL/TLS (FTPS) or replaced with SSH File Transfer Protocol (SFTP).

#### **GARP**

GARP (Generic Attribute Registration Protocol) is a local area network (LAN) protocol that defines procedures by which end stations and switches can register and deregister attributes, such as network identifiers or addresses, with each other. Every end station and switch thus has a record, or list, of all the other end stations and switches that can be reached at any given time.

When an attribute for an end station or switch is registered or deregistered according to GARP, the set of reachable end stations and switches, called participants, is modified according to specific rules. The defined set of participants at any given time, along with their attributes, is a subset of the network topology called the reachability tree. Data frames are propagated only to registered end stations. This prevents attempts to send data to end stations that are not reachable.

---

**GGP**

Gateway-to-Gateway Protocol (GGP) is an obsolete protocol defined for routing datagrams between Internet gateways. It was first outlined in 1982. The GGP was designed as an IP datagram service similar to the TCP and the UDP.

**GMRP**

GARP Multicast Registration Protocol (GMRP) is a Generic Attribute Registration Protocol (GARP) application that provides a constrained multicast flooding facility similar to IGMP snooping.

**GND**

Ground

**GPS**

Global Positioning System

**GR**

Graceful Restart (GR)

**GVRP**

GVRP (GARP VLAN Registration Protocol or Generic VLAN Registration Protocol) is a protocol that facilitates control of virtual local area networks (VLANs) within a larger network. GVRP conforms to the IEEE 802.1Q specification, which defines a method of tagging frame s with VLAN configuration data

**HA**

High Availability (HA)

**HDMI**

HDMI (High-Definition Multimedia Interface) is digital interface capable of transmitting high-quality and high-bandwidth streams of audio and video between devices

**HOL**

Head-Of-Line (HOL) blocking should be prevented on a port. HOL blocking happens when HOL packet of a buffer cannot be switched to an output port (i.e. HOL occurs when a line of packets is held up by the first packet).

**HTTP**

Hyper Text Transfer Protocol (HTTP)

**HTTPS**

Hyper Text Transfer Protocol Secure (HTTPS)

**IANA**

Internet Assigned Numbers Authority (IANA)

**ICMP**

Internet Control Message Protocol

**IDPR**

Inter-domain Routing Protocol (IDPR). The objective of IDPR is to construct and maintain routes, between source and destination administrative domains, that provide user traffic with the requested services within the constraints stipulated for the domains transited.

---

**IETF**

Internet Engineering Task Force (IETF) is an open standards organization, which develops and promotes voluntary Internet standards, in particular the technical standards that comprise the Internet protocol suite (TCP/IP).

**IGMP**

The Internet Group Management Protocol (IGMP) is a communications protocol used by hosts and adjacent routers on IPv4 networks to establish multicast group memberships. IGMP is an integral part of IP multicast and allows the network to direct multicast transmissions only to hosts that have requested them.

**IGP**

Interior Gateway Protocol (IGP) is a type of routing protocol used for exchanging routing table information between gateways (commonly routers) within an autonomous system (for example, a system of corporate local area networks). This routing information can then be used to route network-layer protocols like IP.

**IGRP**

Interior Gateway Routing Protocol (IGRP) is a proprietary distance vector routing protocol that manages the flow of routing information within connected routers in the host network or autonomous system. The protocol ensures that every router has routing tables updated with the best available path. IGRP also avoids routing loops by updating itself with the changes occurring over the network and by error management.

**IGS**

The Internet Group Management Protocol (IGMP) Snooping (IGS) is designed to prevent hosts on a local network from receiving traffic for a multicast group they have not explicitly joined. It provides switches with a mechanism to prune multicast traffic from links that do not contain a multicast listener (an IGMP client). Essentially, IGS is a layer 2 optimization for the Layer 3 IGMP.

**IKE**

Internet Key Exchange (IKE)

**IP**

Internet Protocol (IP).

**IPSec**

IPSec (Internet Protocol Security) is a suite of protocols that provides security to Internet communications at the IP layer. The most common current use of IPSec is to provide a Virtual Private Network (VPN), either between two locations (gateway-to-gateway) or between a remote user and an enterprise network (host-to-gateway); it can also provide end-to-end, or host-to-host, security.

**IPv4**

IPv4 and IPv6 are Internet protocol version 4 and Internet protocol version 6. IPv4 supports:

- IPv4 has a 32-bit address length
- IPv4 binary bits are separated by a dot(.) whereas IPv6 binary bits are separated by a colon(:).
- IPv4 is a numeric addressing method whereas IPv6 is an alphanumeric addressing method
- It Supports Manual and DHCP address configuration
- In IPv4 end to end, connection integrity is Unachievable
- It can generate  $4.29 \times 10^9$  address space

- 
- Fragmentation performed by Sender and forwarding routers
  - In IPv4 Packet flow identification is not available
  - In IPv4 checksum field is available
  - It has broadcast Message Transmission Scheme
  - In IPv4 Encryption and Authentication facility not provided
  - IPv4 has a header of 20-60 bytes.

#### **IPv6**

IPv6 stands for Internet protocol version 6. An IPv6 address consists of eight groups of four hexadecimal digits. An example of IPv6 address is as follows

3001:0da8:75a3:0000:0000:8a2e:0370:7334

there are different types of IPv6 addresses:

- Unicast addresses—it identifies a unique node on a network and usually refers to a single sender or a single receiver.
- Multicast addresses—it represents a group of IP devices and can only be used as the destination of a datagram.
- Anycast addresses—it is assigned to a set of interfaces that typically belong to different nodes.

#### **IRTP**

Internet Reliable Transaction Protocol (IRTP) is a transport level host to host protocol designed for an Internet environment. It provides reliable, sequenced delivery of packets of data between hosts and multiplexes / demultiplexes streams of packets from/to user processes representing ports.

#### **ISAKMP**

Internet Security Association and Key Management Protocol (ISAKMP)

#### **ISDN**

Integrated Services Digital Network (ISDN)

#### **ISL**

ISL stands for Inter-Switch Link which is one of the VLAN protocols. The ISL is proprietary of Cisco and is used only between Cisco switches. It operates in a point-to-point VLAN environment and supports up to 1000 VLANs and can be used over Fast Ethernet and Gigabit Ethernet links only.

#### **ISP**

Internet service provider (ISP)

#### **ISS**

Intelligent Switch Solution (ISS).

#### **IST**

The Internal Spanning Tree (IST) instance receives and sends BPDUs to the CST. The IST can represent the entire MST region as a CST virtual bridge to the outside world.

#### **IVL**

Independent VLAN Learning (IVL)

#### **IVR**

Inter VLAN Routing (IVR)

#### **IWF**

InterWorking Function (IWF).

---

**L2GP**

Layer 2 Gateway Port (L2GP)

**LA**

Link Aggregation

**LACP**

Link Aggregation Control Protocol

**LAG**


Link Aggregation Group

**LAN**

Local Area Network

**LC**

LC (Lucent Connector) is a miniaturized version of the fiber-optic SC (Standard Connector) connector. It looks somewhat like the SC, but is half the size with a 1.25mm ferrule instead of 2.5mm.

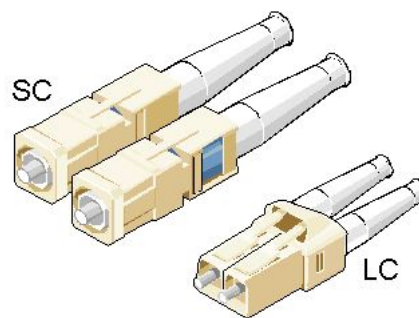

**SC and LC Connectors**

**LED**

Light-emitting diode (LED) is a widely used standard source of light in electrical equipment.

**LLDP**

Link Layer Discovery Protocol (LLDP)

**LM**

Line Module (LM)

**LSA**

Link State Advertisement (LSA)

**LSDB**

link state database (LSDB)

**LSR**

link state routing (LSR)

**MAC**

Media access control (MAC) is a sublayer of the data link layer in the seven-layer OSI network reference model. MAC is responsible for the transmission of data packets to and from the network-interface card, and to and from another remotely shared channel.



---

**MAU**

Medium Attachment Unit (MAU)

**MD5**

Message Digest Algorithm 5 (MD5) is a cryptographic hash algorithm that can be used to create a 128-bit string value from an arbitrary length string.

A hash function provides encryption using an algorithm and no key. A variable-length plaintext is “hashed” into a (typically) fixed-length hash value (often called a “message digest” or simply a “hash”). Hash functions are primarily used to provide integrity; if the hash of a plaintext changes, the plaintext itself has changed.

Common older hash functions include Secure Hash Algorithm 1 (SHA-1), which creates a 160-bit hash and Message Digest 5 (MD5), which creates a 128-bit hash.

Although there has been insecurities identified with MD5, it is still widely used, and its most common use is to verify the integrity of files.

**MDI**

Media Independent Interface (MDI) and Media Independent Interface with Crossover (MDIX) are basically ports on a computer and a network switch, router, or hub, respectively.

**MDIX**

Media Independent Interface with Crossover (MDIX) and Media Independent Interface (MDI) are basically ports on a computer and a network switch, router, or hub, respectively.

**MED**

Media Endpoint Discovery (MED); LLDP does not contain the capability of negotiating additional information such as PoE management and VLAN assignments. This capability was added as an enhancement known as Media Endpoint Discovery or MED, resulting in the enhanced protocol LLDP-MED. The MED enhancement has been standardized by the Telecommunications Industry Association in standard number ANSI/TIA-1057.

**MHRP**

Multipath Hybrid Routing Protocol (MHRP) is a multipath routing protocol for hybrid Wireless Mesh Network (WMN), which provides security and uses technique to find alternate path in case of route failure.

**MIB**

Management Information Base (MIB) is the hierarchical database used by the simple network management protocol (SNMP) to describe the particular device being monitored.

**MIB OID**

Management Information Base (MIB) is the hierarchical database used by the simple network management protocol (SNMP) to describe the particular device being monitored.

MIB Object Identifier (OID), as known as a MIB object identifier in the SNMP, is a number assigned to devices in a network for identification purposes. OID numbering is hierarchical. Using the IETF notation of digits and dots, resembling very long IP addresses, various registries such as ANSI assign high-level numbers to vendors and organizations. They, in turn, append digits to the number to identify individual devices or software processes.

**MIC**

Media redundancy Interconnection Client (MIC) is a member node of a MRP Interconnect ring.

---

**MIM**

Media redundancy Interconnection Manager (MIM) is a node in a MRP Interconnect ring which acts a redundancy manager.

**MLDS**

Multicast Listener Discovery Snooping (MLDS) constrains the flooding of IPv6 multicast traffic on VLANs. When MLDS is enabled on a VLAN, a device examines MLD messages between hosts and multicast routers and learns which hosts are interested in receiving traffic for a multicast group. On the basis of what it learns, the device then forwards multicast traffic only to those interfaces in the VLAN that are connected to interested receivers instead of flooding the traffic to all interfaces.

**MM**

MultiMode (MM) Mode is in optical fiber with a larger core than singlemode fiber. Typically, MM has a core diameter of 50 or 62.5  $\mu\text{m}$  and a cladding diameter of 125  $\mu\text{m}$ .

**MIC**

Media redundancy Interconnection Client (MIC) is a member node of a MRP Interconnect ring.

**MPLS**

Multiprotocol Label Switching (MPLS) is a routing technique in telecommunications networks that directs data from one node to the next based on short path labels rather than long network addresses, thus avoiding complex lookups in a routing table and speeding traffic flows. The labels identify virtual links (paths) between distant nodes rather than endpoints. MPLS can encapsulate packets of various network protocols, hence the "multiprotocol" reference on its name.

**MRA**

Media Redundancy Automanager (MRA). To configure a Media Redundancy Automanager (MRA), the node or nodes elect an MRM by a configured priority value.

**MRC**

Media Redundancy Client (MRC) is a member node of a MRP ring.

**MRM**

Media Redundancy Manager (MRM) is a node in the network which acts a redundancy manager.

**MRP**

Media Redundancy Protocol (MRP) is a networking protocol designed to implement redundancy and recovery in a ring topology.

**MSR**

- 1) MSR (MIB Save and Restore).
- 2) Model-Specific Register (*MSR*)

**MST**

MST (Multiple Spanning Tree) is the version of STP that allows multiple VLANs to a single instance. It is the standard based protocol defined with IEEE 802.1s. Unlike other spanning tree protocols, in which all the spanning tree instances are independent, MST establishes and maintains IST, CIST, and CST spanning trees.

**MSTI**

Multiple spanning trees, called MSTIs; inside an MST region, multiple spanning trees, called MSTIs, are calculated. Among these MSTIs, MSTI 0 is the IST.

---

**MSTP**

Multiple Spanning-Tree Protocol

**MTU**

Maximum Transmission Unit (MTU)

**MVLAN**

Multicast VLANs (MVLAN)

**NAP**

Network Access Protection (NAP)

**NAPT**

Network address port translation (NAPT) is a variation of the traditional NAT. NAPT extends the notion of translation one step further by also translating transport identifiers (e.g., TCP and UDP port numbers, ICMP query identifiers).

**NAS**

The Network Access Server (NAS) is the front line of authentication – it's the first server that fields network authentication requests before they pass through to the RADIUS. The NAS Identifier (NAS-ID) is a feature that allows the RADIUS server to confirm information about the sender of the authentication request.

**NAT**

Network address translation (NAT) is a method of mapping an IP address space into another by modifying network address information in the IP header of packets while they are in transit across a traffic routing device.

**NBMA**

NBMA (Non Broadcast Multi Access)

**NBNS**

NetBIOS Name Server where NetBIOS stands for Network Basic Input / Output System.

**NC**

NC (normally closed) is a closed (short) circuit creating a path for the current.

**ND**

Neighbor Discovery (ND); the Virtual Router Redundancy Protocol (VRRP) for IPv6 provides a much faster switchover to an alternate default router than can be obtained using standard neighbor discovery (ND) procedures.

**NETBIOS**

Network Basic Input / Output System (NETBIOS)

**NIP**

This set of fields are a vector of N IP unicast addresses, where the value N corresponds to the Number or Sources (N) field.

**NMS**

Network Management System (NMS)

**NO**

NO (normally open) is an open circuit not creating a path for the current.

**NPS**

Network Policy Server (NPS)

---

**NSSA**

Not-so-stubby Area (NSSA)

**NTP**

Network Time Protocol (NTP)

**NVP**

Network Voice Protocol (NVP) was a pioneering computer network protocol for transporting human speech over packetized communications networks. It was an early example of Voice over Internet Protocol technology.

**NVRAM**

Non-volatile random-access memory (NVRAM) is random-access memory that retains data without applied power. This is in contrast to dynamic random-access memory (DRAM) and static random-access memory (SRAM), which both maintain data only for as long as power is applied, or such forms of memory as magnetic tape, which cannot be randomly accessed but which retains data indefinitely without electric power.

**OID**

Object Identifier

**OSPF**

Open Shortest Path First routing protocol

**OUI**

organization unique identifiers (OUI)s. LLDP enables defining optional *TLV* units by using organization unique identifiers (OUIs) or organizationally-specific TLVs. An OUI identifies the category for a *TLV* unit depending on whether the OUI follows the IEEE 802.1 or IEEE 802.3 standard.

**P2P**

Peer-to-peer (P2P) transparent clock for Precision Time Protocol (PTP).

**PAE**

Port Access Entity (PAE). 802.1X-2001 defines two logical port entities for an authenticated port—the "controlled port" and the "uncontrolled port". The controlled port is manipulated by the 802.1X PAE (Port Access Entity) to allow (in the authorized state) or prevent (in the unauthorized state) network traffic ingress and egress to/from the controlled port. The uncontrolled port is used by the 802.1X PAE to transmit and receive EAPOL frames.

**PAP**

Password Authentication Protocol (PAP) is a password-based authentication protocol used by Point to Point Protocol (PPP) to validate users. PAP stops working after establishing the authentication; thus, it can lead to attacks on the network.

**PC**

Personal Computer

**PCB**

Provider Core Bridge (PCB) or S-VLAN Bridge; PCB integrates only one S-VLAN component. It is capable of providing single service on a port.

**PDU**

A Protocol Data Unit (PDU) is a single unit of information transmitted among peer entities of a computer network. A PDU is composed of protocol-specific control information and user data.

---

**P/E**

Program/Erase (P/E). Writing a byte to flash memory involves two steps: Program and Erase (P/E). P/E cycles can serve as a criterion for quantifying the endurance of a flash storage device.

**PEB**

Provider Edge Bridge (PEB); Provider Edge Bridge integrates one S-VLAN component with zero or many C-VLAN components as well as integrates each C-VLAN (up to 4094 C-VLANs) individually with a different S-VLAN (up to 4094 S-VLANs).

**PEM**

PEM (originally "Privacy Enhanced Mail") is the most common format for X.509 certificates, CSRs, and cryptographic keys. A PEM file is a text file containing one or more items in Base64 ASCII encoding, each with plain-text headers and footers (e.g. -----BEGIN CERTIFICATE----- and -----END CERTIFICATE-----). A single PEM file could contain an end-entity certificate, a private key, or multiple certificates forming a complete chain of trust. Most certificate files downloaded from SSL.com will be in PEM format

**PEP**

Provider Edge Port (PEP). The Customer Edge Port and each Provider Edge Port are treated as separate Bridge Ports by the spanning tree protocol. If the C-VLAN component connects to the S-VLAN component with a single Provider Edge Port, and the associated service instance supports no more than two customer interfaces, then all frames (including Spanning Tree BPDUs) addressed to the Bridge Group Address may be relayed between the two Ports of the C-VLAN component without modification. Otherwise, the Spanning Tree Protocol Entity shall execute the Rapid Spanning Tree Protocol (RSTP, Clause 17 of IEEE Std 802.1D), as modified by the provisions of this subclause.

**PHB**

PHB (Per Hop Behavior) is a term used in differentiated services (DiffServ) or multiprotocol label switching (MPLS). It defines the policy and priority applied to a packet when traversing a hop (such as a router) in a DiffServ network.

**PHY**

A PHY, an abbreviation for "physical layer", is an electronic circuit, usually implemented as an integrated circuit, required to implement physical layer functions of the OSI model in a network interface controller. A PHY connects a link layer device (often called MAC as an acronym for medium access control) to a physical medium such as an optical fiber or copper cable. A PHY device typically includes both physical coding sublayer (PCS) and physical medium dependent (PMD) layer functionality.[16]-PHY may also be used as a suffix to form a short name referencing a specific physical layer protocol, for example M-PHY. .

**PIM**

Protocol-Independent Multicast (PIM) is a family of multicast routing protocols for Internet Protocol (IP) networks that provide one-to-many and many-to-many distribution of data over a LAN, WAN or the Internet. It is termed protocol-independent because PIM does not include its own topology discovery mechanism, but instead uses routing information supplied by other routing protocols. PIM is not dependent on a specific unicast routing protocol; it can make use of any unicast routing protocol in use on the network. PIM does not build its own routing tables. PIM uses the unicast routing table for reverse-path forwarding.

There are four variants of PIM:

- 
- PIM Sparse Mode (PIM-SM) explicitly builds unidirectional shared trees rooted at a rendezvous point (RP) per group, and optionally creates shortest-path trees per source. PIM-SM generally scales fairly well for wide-area usage.
  - PIM Dense Mode (PIM-DM) uses dense multicast routing. It implicitly builds shortest-path trees by flooding multicast traffic domain wide, and then pruning back branches of the tree where no receivers are present. PIM-DM is straightforward to implement but generally has poor scaling properties. The first multicast routing protocol, DVMRP used dense-mode multicast routing. See the PIM Internet Standard RFC 3973.
  - Bidirectional PIM (Bidir-PIM) explicitly builds shared bi-directional trees. It never builds a shortest path tree, so may have longer end-to-end delays than PIM-SM, but scales well because it needs no source-specific state. See Bidirectional PIM Internet Standard RFC 5015, 70–73.
  - PIM Source-Specific Multicast (PIM-SSM) builds trees that are rooted in just one source, offering a more secure and scalable model for a limited number of applications (mostly broadcasting of content). In SSM, an IP datagram is transmitted by a source *S* to an SSM destination address *G*, and receivers can receive this datagram by subscribing to channel (*S,G*). See informational RFC 3569

### **Bidirectional (Bidir) PIM**

Bidirectional PIM (Bidir-PIM) explicitly builds shared bi-directional trees. It never builds a shortest path tree, so may have longer end-to-end delays than PIM-SM, but scales well because it needs no source-specific state. See Bidirectional PIM Internet Standard RFC 5015, 70–73.

### **PIM-DM**

Protocol-Independent Multicast Dense Mode (PIM-DM) uses dense multicast routing. It implicitly builds shortest-path trees by flooding multicast traffic domain wide, and then pruning back branches of the tree where no receivers are present. PIM-DM is straightforward to implement but generally has poor scaling properties.

### **PIM-SM**

Protocol-Independent Multicast Sparse Mode (PIM-SM) explicitly builds unidirectional shared trees rooted at a rendezvous point (RP) per group, and optionally creates shortest-path trees per source. PIM-SM generally scales fairly well for wide-area usage.

### **PING**

Packet Internet Groper (PING or Ping)

### **PIP**

Provider Instance Port (PIP)

### **PIR**

Peak Information Rate (PIR) is a burstable rate set on routers and/or switches that allows throughput overhead. Related to committed information rate (CIR) which is a committed rate speed guaranteed/capped.

### **PMBR**

*PIM* Multicast Border Router (PMBR)

### **PMTU**

Path Maximum Transmission Unit (PMTU)

---

**PNAC**

Port Based Network Access Control (PNAC), or 802.1X, authentication requires a client, an authenticator, and an authentication server. The client is a device that wants to connect to the network.

**PNP**

Provider Network Ports (PNP)

**PoE**

Power over Ethernet (PoE) is distributing power over an Ethernet network. Because the power and signal are on the same cable, PoE enables remote network devices such as ceiling-mounted access points, surveillance cameras and LED lighting to be installed far away from AC power sources.

**PPP**

Point-to-Point Protocol (PPP); The user or machine sends a request to a Network Access Server (NAS) to gain access to a particular network resource using access credentials. The credentials are passed to the NAS device via the data link layer (L2) protocol—for example, Point-to-Point Protocol (PPP) in the case of many dial up or DSL providers or posted in an HTTPS secure web form.

**PPVID**

Port and Protocol *VLAN* ID (PPVID)

**PS**

Power Supply

**PTP**

Precision Timing Protocol

**PVID**

Port *VLAN* ID (PVID)

**PVLAN**

Private *VLAN* (PVLAN); Private *VLAN*, also known as port isolation, is a technique in computer networking where a *VLAN* contains switch ports that are restricted such that they can only communicate with a given uplink. The restricted ports are called private ports

**PVRST**

Per *VLAN* Rapid Spanning-Tree

**PVRSTP**

Per *VLAN* Rapid Spanning-Tree Protocol

**PW**

An Ethernet pseudowire (PW) is used to carry Ethernet/802.3 Protocol Data Units (PDUs) over an MPLS network. See RFC 4448 for details.

**Q-in-Q**

802.1Q tunneling (Q-in-Q) is a technique often used by Ethernet providers as a layer 2 VPN for customers. During 802.1Q (or dot1q) tunneling, the provider will put an 802.1Q tag on all the frames that it receives from a customer with a unique *VLAN* tag. By using a different *VLAN* tag for each customer we can separate the traffic from different customers and also transparently transfer it throughout the service provider network.

**QoS**

Quality of Service (QoS) refers to traffic prioritization and resource reservation control mechanisms rather than the achieved service quality. QoS defines the ability to provide different priorities to

---

different applications, users, or data flows or the ability to guarantee a certain level of performance to a data flow.

**QRV**

Querier's Robustness Variable (QRV).

**RADIUS**

Remote Authentication Dial-In User Service

**RAM**

Random-access memory (RAM) is a form of computer memory that can be read and changed in any order, and typically is used to store working data and machine code.

**RARP**

The Reverse Address Resolution Protocol (RARP) is an obsolete computer communication protocol used by a client computer to request its Internet Protocol (IPv4) address from a computer network, when all it has available is its link layer or hardware address, such as a MAC address.

**RBAC**

Role Based Authentication (RBAC)

**RED**

Random early detection (RED) is where a single queue may have several different sets of queue thresholds.

**RIP**

**RIP** (Routing Information Protocol) sends routing-update messages at regular intervals and when the network topology changes. When a router receives a routing update that includes changes to an entry, it updates its routing table to reflect the new route. The metric value for the path is increased by 1, and the sender is indicated as the next hop. RIP routers maintain only the best route (the route with the lowest metric value) to a destination. After updating its routing table, the router immediately begins transmitting routing updates to inform other network routers about the change. These updates are sent independently of the regularly scheduled updates that RIP routers send. RIP uses a hop count as a way to determine network distance. Each host with a router in the network uses the routing table information to determine the next host to route a packet for a specified destination.

**RMON**

Remote network monitoring (RMON) is the process of monitoring network traffic on a remote Ethernet segment for detecting network issues such as dropped packets, network collisions, and traffic congestion

**RP**

Rendezvous point (RP)

**RPF**

RPF stands for Reverse Path Forwarding. PIM uses reverse-path forwarding (RPF) to prevent multicast routing loops by leveraging the unicast routing table on the virtual router. When the virtual router receives a multicast packet, it looks up the source of the multicast packet in its unicast routing table to see if the outgoing interface associated with that source IP address is the interface on which that packet arrived. If the interfaces match, the virtual router duplicates the packet and forwards it out the interfaces toward the multicast receivers in the group. If the interfaces don't match, the virtual router drops the packet. *This is called a RPF failure.*



---

**RPT**

Root Part Tree (RPT)

**RRD**

Route Redistribution (RRD)

**RSVP**

Resource Reservation Protocol (RSVP) is a transport layer protocol designed to reserve resources across a network using the integrated services model. RSVP operates over an IPv4 or IPv6 and provides receiver-initiated setup of resource reservations for multicast or unicast data flows.

**RS-232**

RS-232 is a short range connection between a single host and a single device (such as a PC to a modem) or another host (such as a PC to another PC). The standard uses a single TX line, a single RX line, numerous modem handshaking lines and a ground line with the option of DB9 and DB25 connectors. A minimal 3-wire RS-232 connection consists only the TX, RX, and ground lines, but if flow control is required a minimal 5-wire RS-232 is used adding the RTS and CTS lines. The RS-232 standard has been commonly used in computer serial ports and is still widely used in industrial communication devices.

**RS-422**

RS-422 was meant as a replacement for RS-232 as it offered much higher speeds, better immunity to noise and allow for longer cable lengths making it better suited to industrial environments. The standard uses the same signals as the RS-232 standard, but used differential twisted pair so requires double the number of wires as RS-232. Connectors are not specified in the standard so block or DB connectors are commonly used. RS-422 cannot implement a true multi-point communications network since there can be only one driver on each pair of wires. However, one driver can fan-out to up to ten receivers.

**RS-485**

RS-485 standard addresses some short coming of the RS-422 standard. The standard supports inexpensive local networks and multidrop communication links, using the same differential signalling over twisted pairs as RS-422. The main difference being that in RS-485 drivers use three-state logic allowing the individual transmitters to deactivate while not transmitting, while RS-422 the transmitter is always active therefore holding the differential lines. Up to 32 devices can be connected, but with repeaters a network with up to 256 devices can be achieved. RS-485 can be used in a full-duplex 4-wire mode or half-duplex 2-wire mode. With long wires and high baud-rates it is recommended that termination resistors are used at the far ends of the network for signal integrity

**RST**

RST stands for reset. RST is one of the TCP flags.

TCP flags are various types of flag bits present in the TCP header. Each of them has its own significance. They initiate connections, carry data, and tear down connections. The commonly used TCP flags are SYN, ACK, RST, FIN, URG, PSH.

- SYN (synchronize): Packets that are used to initiate a connection.
- ACK (acknowledgment): Packets that are used to confirm that the data packets have been received, also used to confirm the initiation request and tear down requests.
- RST (reset): Signify the connection is down or maybe the service is not accepting the requests.

- 
- **FIN (finish):** Indicate that the connection is being torn down. Both the sender and receiver send the FIN packets to gracefully terminate the connection.
  - **PSH (push):** Indicate that the incoming data should be passed on directly to the application instead of getting buffered.
  - **URG (urgent):** Indicate that the data that the packet is carrying should be processed immediately by the TCP stack.

**RSTP**

Rapid Spanning-Tree Protocol

**RTS**

Request to Send (RTS)/CTS Flow Control is another flow control mechanism that is part of the RS232 standard.

**RX**

Receive

**SA**

Security Associations (SA). A SA is a relationship between two or more entities that describes how the entities will utilize security services to communicate securely. In endpoint-to-endpoint Transport Mode, both end points of the IP connection implement IPSec.

**SEM**

State Event Machines (SEM)

**SFP**

SFP (Small Form-factor Pluggable) is a small transceiver that plugs into the SFP port of a network switch and connects to fibre channel and gigabit Ethernet (GbE) optical fiber cables at the other end. The SFP converts the serial electrical signals to serial optical signals and vice versa. SFP modules are hot swappable and contain ID and system information for the switch.

**SFTP**

SSH File Transfer Protocol (SFTP)

**SHA**

Secure Hash Algorithm is the name of a series of hash algorithms.

A hash function provides encryption using an algorithm and no key. A variable-length plaintext is “hashed” into a (typically) fixed-length hash value (often called a “message digest” or simply a “hash”). Hash functions are primarily used to provide integrity; the hash of a plaintext changes, the plaintext itself has changed.

Common older hash functions include Secure Hash Algorithm 1 (SHA-1), which creates a 160-bit hash and Message Digest 5 (MD5), which creates a 128-bit hash.

**SIP**

Session Initiation Protocol (SIP) is mostly well known for establishing voice and video calls over the Internet. To initiate such sessions, SIP uses simple request and response messages. For example, the INVITE request message is used to invite a user to begin a session and ACK confirms the user has received the request. The response code 180 (Ringing) means the user is being alerted of the call and 200 (OK) indicates the request was successful. Once a session has been established, BYE is used to end the communication.

---

**SISP**

Switch Instance Shared Port (SISP)

**SLA**

Service-level agreements (SLA).

**SLIP**

Serial Line Internet Protocol (SLIP); SLIP is the predecessor protocol of Point-to-Point Protocol (PPP). SLIP does not provide authentication, is a static IP addressing assignment, and data is transferred in synchronous form.

**SM**

State Machine

**SNAT**

Static Network Address Translation (SAT, SNAT) performs one-to-one translation of internal IP addresses to external ones.

**SNMP**

Simple Network Management Protocol

**SNTP**

Simple Network Time Protocol (SNTP)

**SPT**

Shortest path tree (SPT) is used for multicast transmission of packets with the shortest path from sender to recipients.

**SR**

State Refresh (SR) message. For a given (S,G) tree, SR messages will be originated by all routers that use an interface directly connected to the source as the RPF interface for the source. Ref: IETF "State Refresh in PIM-DM"

**SRM**

State Refresh Message (SRM). For a given (S,G) tree, SRM will be originated by all routers that use an interface directly connected to the source as the RPF interface for the source. Ref: IETF "State Refresh in PIM-DM"

**SSD**

SSD (Solid State Drive) is an all-electronic, non-volatile random access storage drive.

**SSH**

(Secure SHell) is a security protocol for logging into a remote server. SSH provides an encrypted session for transferring files and executing server programs on all platforms. Also serving as a secure client/server connection for applications such as database access and email, SSH supports a variety of authentication methods.

**SSL**

Secure Sockets Layer

**SSM**

Source-Specific Multicast (SSM)

**SST**

Single Spanning Tree (SST); SST is formed in either of the following situations:

- A switch running STP or RSTP belongs to only one spanning tree.

- 
- An MST region has only one switch.

**STP**

Spanning Tree Protocol (STP) is a Layer 2 protocol that runs on bridges and switches. The specification for STP is IEEE 802.1D. The main purpose of STP is provide path redundancy while preventing undesirable loops in the network.

**SVL**

Shared VLAN Learning (SVL)

**S-VLAN**

Stacked VLAN (S-VLAN)

**TAC**

Taxonomy Access Control (TAC) allows the user administrator to control access to nodes indirectly by controlling which roles can access which categories.

**TACACS**

Terminal Access Controller Access-Control System

**TAI**

International Atomic Time (TAI); if the port is in the master state, the local clock is synchronized to an external source of time traceable to TAI (International Atomic Time) and UTC (Universal Coordinated Time) such as GPS (Global Positioning System) system.

**TB**

Token Bucket (TB). The TB algorithm is based on an analogy of a fixed capacity bucket into which tokens, normally representing a unit of bytes or a single packet of predetermined size, are added at a fixed rate. When a packet is to be checked for conformance to the defined limits, the bucket is inspected to see if it contains sufficient tokens at that time. If so, the appropriate number of tokens, e.g. equivalent to the length of the packet in bytes, are removed ("cached in"), and the packet is passed, e.g., for transmission. The packet does not conform if there are insufficient tokens in the bucket, and the contents of the bucket are not changed.

**TC**

TC (Topology Change); once the Root Bridge is aware of a change in the topology of the network, it sets the Topology Change (TC) flag on the sent BPDUs.

**TCN**

TCN (Topology Change Notification), a kind of BPDU, is sent by bridges towards the root bridge to notify changes in the topology, such as port up or port down.

**TCP**

Transmission Control Protocol

**TFTP**

Trivial File Transfer Protocol

**TLS**

Transport Layer Security (TLS), the successor of the now-deprecated Secure Sockets Layer (SSL), is a cryptographic protocol designed to provide communications security over a computer network.

**TLV**

type, length, and value (TLV) traces


---

**TN**

Telnet (TN) is a networking protocol and software program used to access remote computers and terminals over the Internet or a TCP/IP computer network. Upon providing correct login and sign-in credentials, a user may access a remote system's privileged functionality. Telnet sends all messages in clear text and has no specific security mechanisms.

**TOS**

Type of Service (TOS). IP packets have a field called the Type of Service field (also known as the TOS byte).

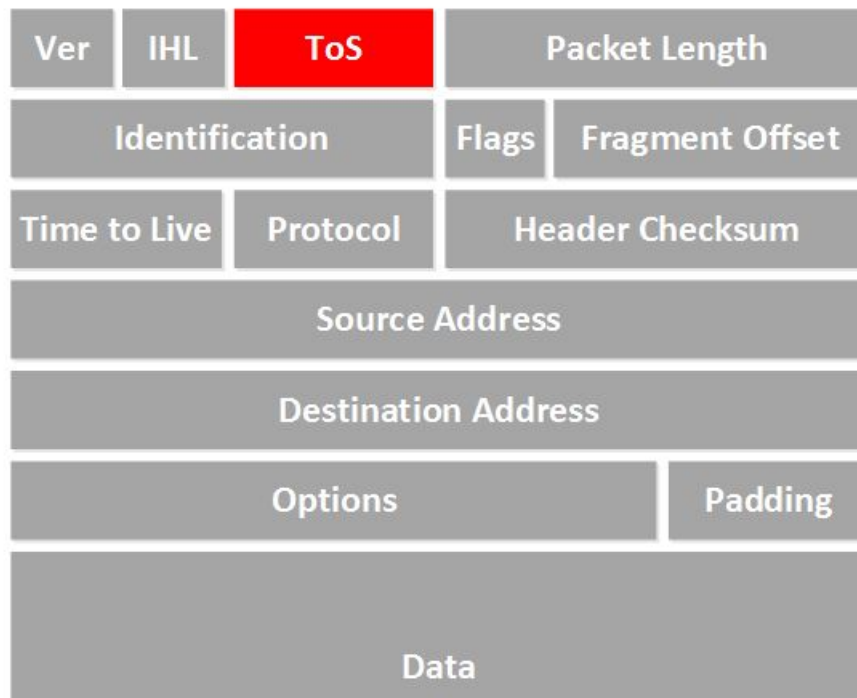**TPID**

Tag Protocol Identifier (TPID)

**TTL**

TTL (time to live). Under IP, TTL is an 8-bit field. In the IPv4 header, TTL is the 9th octet of 20. In the IPv6 header, it is the 8th octet of 40. The maximum TTL value is 255, the maximum value of a single octet. A recommended initial value is 64.

**TX**

Transmit

**UAP**

Uplink Access Port (UAP); when a tagged LLDP is enabled, the LLDP packets with destination address as 'nearest bridge address (01-80-c2-00-00-0E)' will be replicated for all S-Channels emulated over that UAP.

**UART**

UART (Universal Asynchronous Transmitter Receiver) is the most common protocol used for full-duplex serial communication. It is a single LSI (large scale integration) chip designed to perform asynchronous communication. This device sends and receives data from one system to another system.

---

**UDP**

User Datagram Protocol

**UFD**

Uplink failure detection (UFD)

**URM**

Unified Route Map (URM)

**USM**

USM stands for User based Security Model; USM (User based Security Model) and VACM (View-based Access Control Model) are the main features added as a part of the SNMPv3 specification. USM provides both encryption and authentication of the SNMP PDUs, while VACM specifies a mechanism for defining access policies for different users with different MIB trees.

**UTC**

Coordinated Universal Time (UTC); If the port is in the master state, the local clock is synchronized to an external source of time traceable to TAI (International Atomic Time) and UTC (Universal Coordinated Time) such as GPS (Global Positioning System) system.

**UTP**

Unshielded Twisted Pair (UTP) is a pair of wires that are twisted around each other to minimize interference. Ethernet cables are common example of UTP wires.

**UUID**

A Universally Unique IDentifier (UUID) is a 128-bit domain UUID unique to a MRP domain/ring. All MRP instances belonging to the same ring must have the same domain ID.

**VACM**

VACM stands for View-based Access Control Model; USM (User based Security Model) and VACM (View-based Access Control Model) are the main features added as a part of the SNMPv3 specification. USM provides both encryption and authentication of the SNMP PDUs, while VACM specifies a mechanism for defining access policies for different users with different MIB trees.

**Varbind**

A Variable Binding (Varbind) represents a set of Oid/Value pairs. Individual Variable Bindings are stored in the Vb class. Individual Variable Bindings are stored in the Vb class.

Create a variable binding and add the Object identifier in string format:

```
Vb vb = new Vb("1.3.6.1.2.1.1.1.0")
```

Create a variable binding and add the Object identifier in Oid format:

```
Oid oid = new Oid("1.3.6.1.2.1.1.1.0");
```

```
Vb vb = new Vb(oid);
```

**VFI**

Virtual Forwarding Interface (VFI)

**VID**

Management VLAN ID (VID)

**VINES**

Virtual Integrated Network Service (VINES)

**VLAN**

Virtual Local Area Network (VLAN) is a logical subgroup within a local area network that is created via software rather than manually moving cables in the wiring closet.

---

**VPN**

Virtual Private Network (*VPN*)

**VRF**

Virtual Routing and Forwarding (VRF). In IP-based computer networks, VRF is a technology that allows multiple instances of a routing table to co-exist within the same router at the same time. One or more logical or physical interfaces may have a VRF and these VRFs do not share routes; therefore, the packets are only forwarded between interfaces on the same VRF. VRFs are the TCP/IP layer 3 equivalent of a VLAN. Because the routing instances are independent, the same or overlapping IP addresses can be used without conflicting with each other.

**VRRP**

**VRRP** (Virtual Router Redundancy Protocol) is an election protocol that dynamically assigns responsibility for one or more virtual router(s) to the VRRP router(s) on a LAN, allowing several routers on a multi-access link to utilize the same virtual IP address. A VRRP router is configured to run the VRRP protocol in conjunction with one or more other routers attached to a LAN. In a VRRP setup, one router is elected as the virtual router master, and the other routers are acting as backups in case of the failure of the virtual router master. VRRP is designed to eliminate the single point of failure inherent in the static default routed environment

**VSA**

Vendor Specific Attribute (VSA)

**WAN**

A wide area network is a telecommunications network that extends over a large geographic area for the primary purpose of computer networking.

**Web UI**

Web User Interface (Web UI) is a control panel in a device presented to the user via the Web browser. Network devices such as gateways, routers, and switches typically have such control panel that is accessed by entering the IP address of the device into a Web browser in a computer on the same local network.

**WRED**

*WRED* (Weighted Random Early Detection) is a queueing discipline for a network scheduler suited for congestion avoidance. It is an extension to random early detection (RED) where a single queue may have several different sets of queue thresholds.

**WRR**

Weighted Round Robin (WRR) is one of the scheduling algorithms used by the device. In WRR, there is a number of queues and to every queue is assigned weight ( $w$ ). In a classical WRR, the scheduler cycles over the queues, and when a queue with weight  $w$  is visited, the scheduler can send consequently a burst of up to  $w$  packets. This works well for packets with the same size.

**XNS**

Xerox Network Systems (XNS)

---

# Contents

	<b>iBiome - LLDP User Guide . . . . .</b>	<b>i</b>
	<b>Copyright Notice . . . . .</b>	<b>ii</b>
	<b>End User License Agreement (EULA) . . . . .</b>	<b>iii</b>
<b>Chapter: 1</b>	<b>Introduction . . . . .</b>	<b>1</b>
	Purpose and Scope . . . . .	3
	CLI Document Convention . . . . .	3
	CLI Command Modes . . . . .	4
	User Exec Mode . . . . .	6
	Privileged Exec Mode . . . . .	6
	Global Configuration Mode . . . . .	6
	Interface Configuration Mode . . . . .	6
	Port Channel Interface Configuration . . . . .	7
	VLAN Interface Configuration Mode . . . . .	7
	MRP Interface Configuration Mode . . . . .	7
	UFD Configuration Mode . . . . .	8
	DHCP Pool Configuration Mode . . . . .	8
	Privilege Levels and Command Access . . . . .	8
	Configuration Terminal Access . . . . .	12
<b>Chapter: 2</b>	<b>Protocol Description . . . . .</b>	<b>14</b>
<b>Chapter: 3</b>	<b>LLDP Configuration . . . . .</b>	<b>15</b>
	Configuration Topology . . . . .	15
	LLDP TOPOLOGY . . . . .	15
	LLDP-V2 TOPOLOGY . . . . .	16
	LLDP-MED TOPOLOGY . . . . .	17
	Tagged LLDP TOPOLOGY . . . . .	17
	Configuration Guidelines . . . . .	17



Default Configurations . . . . .	.18
LLDP Port Specific Configuration Objects . . . . .	.19
Starting and Shutting down LLDP . . . . .	.19
Enabling LLDP . . . . .	.20
LLDP Global Configuration . . . . .	.27
Configuring LLDP Admin Status . . . . .	.28
Enabling LLDP Basic Optional TLVs . . . . .	.30
Enabling IEEE 802.1 Organizationally Specific TLVs . . . . .	.33
Enabling Particular VLAN Name . . . . .	.35
Enabling Particular PPVID . . . . .	.43
Enabling IEEE 802.3 Organizationally Specific TLVs . . . . .	.50
Disabling LLDP Basic Optional TLVs . . . . .	.53
Disabling IEEE 802.1 Organizationally Specific TLVs . . . . .	.55
Disabling IEEE 802.3 Organizationally Specific TLVs . . . . .	.58
Configuring the LLDP chassis-ID-subtype . . . . .	.60
Configuring the LLDP port-ID-subtype . . . . .	.62
Enable/Configure LLDP Notification Status/Type . . . . .	.64
Clearing LLDP Traffic Counters . . . . .	.67
Clearing LLDP Remote Table . . . . .	.68
Show LLDP Errors . . . . .	.68
Configuring LLDP Trace Options . . . . .	.69
Configuration of LLDP Neighbor MAC Address for LLDP Session . . . . .	.70
Configuration of LLDP Multiple Neighbor MAC Address . . . . .	.73
Configuration of LLDP Management VID . . . . .	.75
Configuration of LLDP VID Digest . . . . .	.80

## Chapter: 4

### LLDP-MED Configuration . . . . . 85

Enabling LLDP-MED Organizationally Specific TLVs . . . . .	.85
Enabling LLDP-MED Capability TLV . . . . .	.85
CLI Configuration . . . . .	.85
Enabling LLDP-MED Capability TLV for Destination MAC Address . . . . .	.88
Disabling LLDP-MED Capability TLV . . . . .	.90
CLI Configuration . . . . .	.91
Disabling LLDP-MED Capability TLV for Destination MAC Address . . . . .	.94
Enabling Network Policy TLV . . . . .	.96
CLI Configuration . . . . .	.96
Enabling LLDP-MED Network TLV for Destination MAC Address . . . . .	.99
Disabling Network Policy TLV . . . . .	.101
Disabling LLDP-MED Network TLV for Destination MAC Address . . . . .	.104
Enabling Inventory Management TLV . . . . .	.107
CLI Configuration . . . . .	.107
Enabling LLDP-MED Network Policy TLV for Destination MAC Address . . . . .	.110
Disabling Inventory Management TLV . . . . .	.112
CLI Configuration . . . . .	.112
Disabling LLDP-MED Inventory Management TLV for Destination MAC Address . . . . .	.115

dress . . . . . 115

---

Enabling Location Identification TLV . . . . .	117
CLI Configuration . . . . .	117
Enabling Location Identification TLV for Destination MAC Address 120	
Disabling Location Identification TLV . . . . .	123
Disabling Location Identification TLV for Destination MAC Address 125	
Enabling Extended Power-Via-MDI TLV . . . . .	127
CLI Configuration . . . . .	127
Enabling Extended Power-Via-MDI TLV for Destination MAC Address 130	
Disabling Extended Power-Via-MDI TLV . . . . .	132
Disabling Extended Power-Via-MDI TLV for Destination MAC Address 134	
Configuring Location Identification Information—Elin Location subtype 137	
Enabling of Elin Location Subtype . . . . .	137
CLI Configuration . . . . .	137
Disabling of Elin Location Subtype . . . . .	139

<b>Chapter: 5</b>	<b>Configuring Tagged LLDP . . . . .</b>	<b>.142</b>
	Enabling Tagged LLDP . . . . .	142
	CLI Configuration . . . . .	142
	Disabling Tagged LLDP . . . . .	143
	CLI Configuration . . . . .	144

# MAP TITLE

## 1. Introduction


The Link Layer Discovery Protocol (*LLDP*) is a vendor-neutral link layer protocol in the Internet Protocol Suite used by network devices for advertising their identity, capabilities, and neighbors at Layer 2 on an IEEE 802 local area network, principally wired Ethernet. The protocol’s multi-vendor support enables network discovery of devices and management tools such as Simple Network Management Protocol ( *SNMP*) in a network made up of devices from different manufacturers.

*LLDP* uses attributes called *TLVs* (Type, Length, Value). The *TLVs* include the following codes:

- **Type code** is used to specify what kind of information is included in this *TLV*. For example, for *LLDP*, a code of 2 means the *TLV* has information about the Port ID.
- **Length** indicates the length of the field containing the value, in bytes.
- **Value**—this field contains the value of the *TLV*. If the Type code is 2, then you can expect to see the Port ID in this field.

*TLVs* for *LLDP* exist within the *LLDP* frame structure. An example of an *LLDP* frame is shown below:

**Figure 1:** LLDP Frame Example

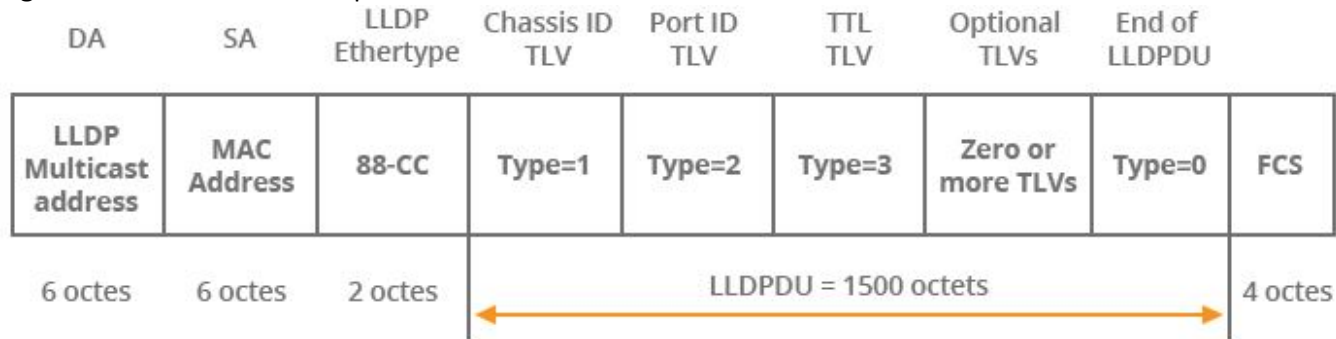

In the *LLDP PDU* of 1500 octets, the mandatory *TLVs* that all *LLDP PDU* ( *LLDP* data units) carry are as follows:

- Chassis ID *TLV*, type 1
- Port ID *TLV* type 2
- *TTL* (Time to Live) *TLV* type 3
- End of *LLDP PDU* with type 0 (this *TLV* always goes at the end to indicate the end of the frame).

*LLDP* enables defining optional *TLV* units by using organization unique identifiers (*OUI*)s or organizationally-specific *TLVs*. An *OUI* identifies the category for a *TLV* unit depending on whether the *OUI* follows the IEEE 802.1 or IEEE 802.3 standard. These *TLVs* are IEEE 802.1 or IEEE 802.3 organizationally-specific.

The optional *TLVs* are basic and organizationally -specific. The following table lists all optional *TLVs* with their names, units, and description.


TLV Group	TLV Name	TLV units	Description
Basic management	basic-tlv	port-descr, sys-name, sys-descr, sys-capab, and mgmt-addr	Specifies the system name, port description, system capability, system description, and management address to be advertised.
Organizationally - specific 802.1 OUI	dot1-tlv	vlan-name, port-vlan-id, protocol-vlan-id, vid-usage-digest, link-aggregation, mgmt-vid	Specifies advertising of <i>VLAN</i> ID, protocol <i>VLAN</i> name, port <i>VLAN</i> ID, link aggregation, VID usage digest, and management VID.
Organizationally - specific 802.3 OUI	dot3-tlv	max-framesize, macphy-config, and link-aggregation	Specifies advertising of maximum frame size, <i>MAC</i> or <i>PHY TLV</i> , and link aggregation.

If the *LLDP PDU* includes optional *TLVs*, they will be inserted between the Time-To-Live *TLV* and End-of-LLDPDU *TLV*.

The transmission status of the optional *TLVs* is disabled by default and they have to be enabled. See sections “Enabling LLDP Basic Optional *TLVs*” and “Enabling IEEE 802.1 Organizationally Specific *TLVs*”.

The next image shows an Wireshark capture of *LLDP* frame which illustrates all available *TLVs*.

**Figure 2:** Wireshark Screen Capture of an LLDP

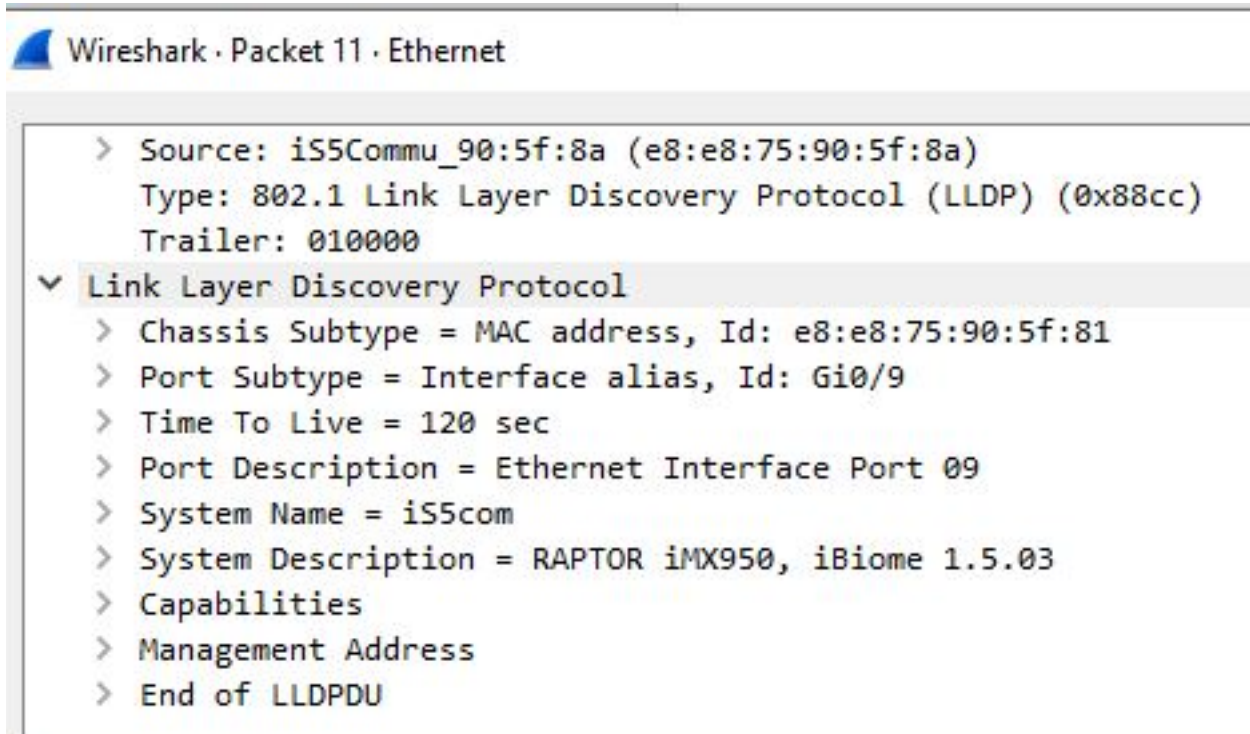

Custom *TLVs* can also be created by using type number 127 where each vendor can specify their own information within the value field.

The device's *LLDP* Admin Status can be configured or it can be configured if a device is to send or receive *LLDP* packets on a particular interface using the "no lldp transmit" and "no lldp receive" Interface Mode commands (refer to section Configuring *LLDP* Admin Status).

## LLDP-MED

*LLDP* does not contain the capability of negotiating additional information such as PoE management and *VLAN* assignments. This capability was added as an enhancement known as Media Endpoint Discovery or *MED*, resulting in the enhanced protocol *LLDP-MED*.

The *MED* enhancement has been standardized by the Telecommunications Industry Association in standard number ANSI/TIA-1057.

This chapter describes the purpose and scope of the document, acronyms, and general configurations used in this document.

## 1.1. Purpose and Scope

The IS5Com *LLDP* (Link Layer Discovery Protocol) source code product provides an efficient Layer 2 neighbor discovery mechanism as required by the Industry Standards. It allows devices to advertise information about them to peer devices on the same *LAN* and to learn information about peer devices. This document explains the configuration of *LLDP* as a part of IS5Com *ISS* (Intelligent Switch Solution).

The reader is expected to have a basic knowledge of the protocol as a prerequisite.

## 1.2. CLI Document Convention

To provide a consistent user experience, this *CLI* document convention adhere to the Industry Standard *CLI* syntax.

In addition, the font and format are updated to show *DITA* / Structured Framemaker 2019 layout.

Convention	Usage	DESCRIPTION
<i>Italics</i>	User inputs for <i>CLI</i> command	<code>configure terminal</code>
Font as shown	Syntax of the <i>CLI</i> command	<code>configure terminal</code>
< >	Parameter inside the brackets < > indicate the Input fields of syntax	<code>&lt;integer (100-1000)&gt;</code>


Convention	Usage	DESCRIPTION
[ ]	Parameter inside [ ] indicate optional fields of syntax	show split-horizon [all]
{ }	Grouping parameters in the syntax	ip address <ip-address> [secondary {node0   node1}]
	Separating grouped parameters in the syntax	set http authentication-scheme {default  basic  digest}
Font & format as shown	Example & CLI command outputs	<pre> iS5comm# show split-horizon interface 1    Ingress Port VlanId      StorageType   Egress List   =====   =====   Gi0/1          -          Volatile   Gi0/2,Gi0/3,Gi0/6 </pre>
Note	Notes	<b>NOTE:</b> All commands are case-sensitive

## 1.3. CLI Command Modes

The *CLI* Modes are as follows.

The hierarchical structure of the command modes is as shown on the figure below.

**Figure 3:** CLI Command Modes

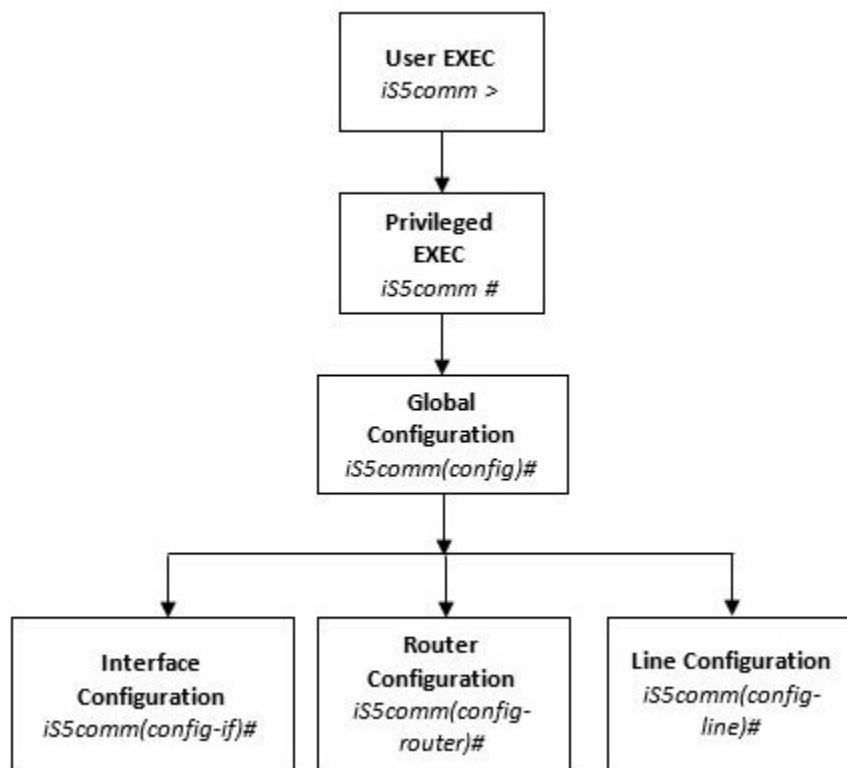

## User Exec Mode

Prompt	Access method	Exit Method
iS5comm>	This is the initial mode to start a session.	logout

## Privileged Exec Mode

Prompt	Access method	Exit Method
iS5comm#	The User EXEC mode command <code>enable</code> is used to enter the Privileged EXEC Mode	To return from the Privileged EXEC mode to User EXEC mode, the command <code>disable</code> is used.

## Global Configuration Mode

Prompt	Access method	Exit Method
iS5comm(config) #	The Privileged EXEC mode command <code>configure terminal</code> is used to enter the Global Configuration Mode.	To return from the Global Configuration Mode to Privileged Mode, the command <code>exit</code> is used.

## Interface Configuration Mode

Prompt	Access method	Exit Method
iS5comm(config-if) #	The Global Configuration mode command <code>interface &lt;interface-type&gt;&lt;interface-id&gt;</code> is used to enter the Interface Configuration Mode.	To return from the Interface Configuration mode to Global Configuration Mode, the command <code>exit</code> is used. To exit from the Interface Configuration mode to Privileged EXEC Mode, the command <code>end</code> is used.



## Port Channel Interface Configuration

Prompt	Access method	Exit Method
<code>iS5comm(config-if) #</code>	The Global Configuration mode command <code>interface port &lt;port channel-id&gt;</code> is used to enter the Port Channel Interface Configuration Mode.	To return from the Port Channel Interface Configuration mode to Global Configuration Mode, the command <code>exit</code> is used. To exit from the Port Channel Interface Configuration mode to Privileged EXEC Mode, the command <code>end</code> is used.

## VLAN Interface Configuration Mode

Prompt	Access method	Exit Method
<code>iS5comm(config-if) #</code>	The Global Configuration mode command <code>interface vlan &lt;vlan id&gt;</code> is used to enter the VLAN Interface Configuration Mode.	To return from the VLAN Interface Configuration mode to Global Configuration Mode, the command <code>exit</code> is used. To exit from the VLAN Interface Configuration mode to Privileged EXEC Mode, the command <code>end</code> is used.

## MRP Interface Configuration Mode

Prompt	Access method	Exit Method
<code>iS5comm(config-mrp) #</code>	The Global Configuration mode command <code>mrp ringid 1s</code> is used to enter the MRP Interface Configuration Mode.	To return from the MRP Interface Configuration mode to Global Configuration Mode, the command <code>exit</code> is used. To exit from the MRP Interface Configuration mode to Privileged EXEC Mode, the command <code>end</code> is used.

## UFD Configuration Mode

Prompt	Access method	Exit Method
<code>iS5comm(config-if) #</code>	The Global Configuration mode command <code>ufd group &lt;group-id (1-65535)&gt;</code> is used to enter the UFD Interface Configuration Mode.	To return from the UFD Configuration mode to Global Configuration Mode, the command <code>exit</code> is used. To exit from the UFD Configuration mode to Privileged EXEC Mode, the command <code>end</code> is used.

## DHCP Pool Configuration Mode

Prompt	Access method	Exit Method
<code>iS5comm(dhcp-config) #</code>	The Global Configuration mode command <b>(config) # ip dhcp pool</b> <i>&lt;pool number (1-2147483647)&gt;</i> is used to enter the UFD Interface Configuration Mode.	To return from the DHCP Pool Configuration Mode to Global Configuration Mode, the command <code>exit</code> is used. To exit from the DHCP Pool Configuration Mode to Privileged EXEC Mode, the command <code>end</code> is used.

## Privilege Levels and Command Access

The following table will list out the commands available for the different user levels in Privileged and User Exec levels.

Command	First Param	Guest	Tech	Admin	Description
archive	download-sw		x	x	Downloads software image
clear					Clears the specified parameters
	alarm	x	x	x	Alarm related information
	au-message	x	x	x	Address update messages related information
	cfa	x	x	x	CFA module related information
	interfaces	x	x	x	Protocol specific configuration of the interface
	meter-stats	x	x	x	Specific configuration for meter
	poe	x	x	x	PoE related configuration

Command	First Param	Guest	Tech	Admin	Description
	screen	x	x	x	Screen information
	ip		x	x	IP related configuration
	line		x	x	Configures line information
	logs		x	x	Log information
	protocol		x	x	Clears the specified protocol counters
	spanning-tree		x	x	Spanning tree related configuration
	tcp		x	x	TCP related configuration
clock	set		x	x	Sets the system clock value
config-restore					Configures the restore option
	flash		x	x	File in flash to be used for restoration
	norestore		x	x	No configuration restore
	remote		x	x	Remote location configuration
configure	terminal		x	x	Configures the terminal
copy			x	x	Various copy options
debug					Configures trace for the protocol
	ip	x	x	x	IP related configuration
	show	x	x	x	Show mempool status
	sntp	x	x	x	SNTP related configuration
	crypto		x	x	Crypto related information
	cybsec		x	x	Cybsec related information
	dot1x		x	x	PNAC related configuration
	etherchannel		x	x	Etherchannel related information
	firewall		x	x	Firewall related configuration
	garp		x	x	GARP related configuration
	interface		x	x	Configures trace for the interface management
	lacp		x	x	LACP related configuration
	lldp		x	x	LLDP related configuration

Command	First Param	Guest	Tech	Admin	Description
	lns		x	x	LCD notification server
	nat		x	x	Network Address Translation related configuration
	np		x	x	NPAPI configuration
	ptp		x	x	Precision time protocol related configuration
	qos		x	x	QOS related configuration
	security		x	x	Security related configuration
	spanning-tree		x	x	Spanning tree related protocol configuration
	ssh		x	x	SSH related configuration
	tacm		x	x	Transmission and admission control related configuration
	vlan		x	x	VLAN related configuration
display firewall rules				x	Display firewall rules
dot1x	clear	x	x	x	Clear dot1x configuration
	initialize		x	x	State machine and fresh authentication configuration
	re-authenticat e		x	x	Re-authentication
dump					Display memory content from the given memory location
	mem		x	x	Dump memory
	que		x	x	Show the queue related information
	sem		x	x	Show the semaphore related information
	task		x	x	Show the task related information
egress bridge			x	x	
end			x	x	Exit to the privileged Exec (#) mode

Command	First Param	Guest	Tech	Admin	Description
erase			x	x	Clears the contents of the startup configuration
exit		x	x	x	Logout
factory reset				x	Reset to factory default configuration
factory reset	users			x	Reset all users on switch
firmware			x	x	Upgrades firmware
generate	tech		x	x	Generate the tech report of various system resources and protocol states for debugging
help		x	x	x	Displays help for commands
ip	igmp snooping clear counters	x	x	x	Clears the IGMP snooping statistics
	clear counters		x	x	Clear operation
	dhcp		x	x	DHCP related configuration
	pim		x	x	PIM related configuration
	ssh		x	x	SSH related information
listuser			x	x	List the user, mode and groups
lock			x	x	Lock the console
logout		x	x	x	Logout
memtrace			x	x	Configures memtrace
no ip					IP related information
	dhcp		x	x	DHCP related configuration
	ssh		x	x	SSH related information
no debug					Configures trace for the module
	ip	x	x	x	Stops debugging on IGMP or PIM
	sntp	x	x	x	Stops debugging on SNTP related configurations
	additional options...		x	x	Stops debugging for other options
ping					

Command	First Param	Guest	Tech	Admin	Description
	A.B.C.D	x	x	x	Ping host
	ip dns host name	x	x	x	Ping host
	ip A.B.C.D	x	x	x	Ping host
	vrf	x	x	x	Ping vrf instance
readarpfromH ardware ip	A.B.C.D		x	x	Reads the arp for the given IP
readregister			x	x	Reads the value of the register from the hardware
release dhcp			x	x	Performs release operation
reload			x	x	Restarts the switch
renew dhcp			x	x	Performs renew operation
run script			x	x	Runs CLI commands
shell				x	Shell to Linux prompt
show		x	x	x	Shows configuration or information
sleep		x	x	x	Puts the command prompt to sleep
ssl				x	Configures secure sockets layer related parameters
snmpwalk mib					Allows the user to view Management Information Base related configuration.
	name	x	x	x	
	oid	x	x	x	
traceroute					Traces route to the destination IP
	A.B.C.D		x	x	
write			x	x	Writes the running-config to a flash file
writeregister			x	x	writes in the specified register

## Configuration Terminal Access

The Guest user level does not have access to the configuration terminal.

The Administration level has access to all commands in the configuration terminal.

The Technical level has access to all commands in the configuration terminal with the following exceptions listed below.

- bridge-mode
- enableuser
- mst
- password
- traffic

## 2. Protocol Description

*LLDP* allows stations attached to an IEEE 802 *LAN* (Local Area Network) to advertise its own information to other stations attached to the same IEEE 802 *LAN* and to learn about the other stations.

The information advertised includes:

- Major capabilities provided by the system incorporating that station.
- The management address or addresses of the entity or entities that provide management of those capabilities.
- The identification, of the station's point of attachment to the IEEE 802 *LAN*, required by those management entity or entities.

The advertised information is learnt and stored by recipients in a standard Management Information Base (*MIB*), thus allowing the *NMS* (Network Management System) to access the information using the *SNMP* (Simple Network Management Protocol).



# Configuring LLDP


## 3. LLDP Configuration

The following sections describe the configuration of *LLDP*.

### 3.1. Configuration Topology

#### LLDP TOPOLOGY

Figure 1: LLDP Topology

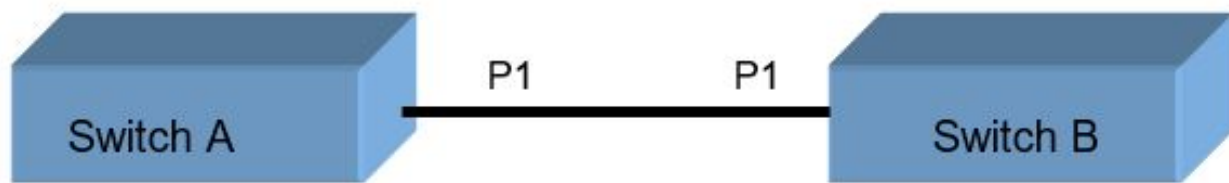

#### Switch A:


- Create interface P1 and make it operational (UP)
- Assign *MAC* (Media Access Control) Address: 00:01:02:03:04:01
- Assign Default *VLAN* (Virtual Local Area Network) *IP* (Internet Protocol) address: 12.0.0.1

#### Switch B:

- Create interface P1 and make it operationally UP
- Assign *MAC* Address: 00:02:02:03:04:01
- Assign Default *VLAN* IP address: 12.0.0.2

## LLDP-V2 TOPOLOGY

**Figure 2:** LLDP-V2 Topology

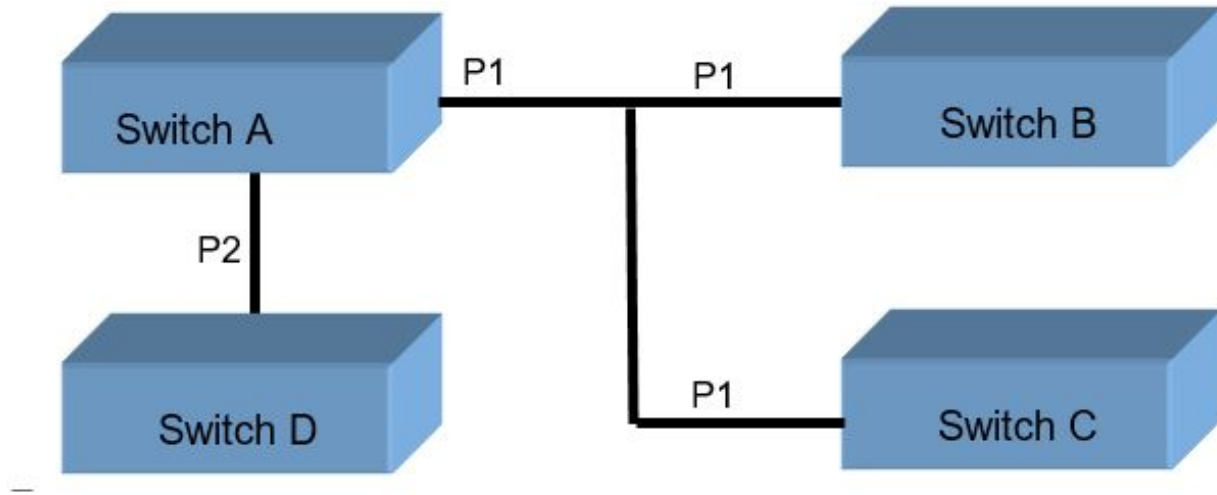

**Switch A:**

- Create interface P1 and make it operationally UP
- Assign MAC (Media Access Control) Address : 00:01:02:03:04:01
- Assign Default VLAN (Virtual Local Area Network) IP (Internet Protocol) address: 12.0.0.1

**Switch B:**

- Create interface P1 and make it operationally UP
- Assign MAC Address D2: 00:02:02:03:04:01
- Assign Default VLAN IP address: 12.0.0.2

**Switch C:**


- Create interface P1 and make it operationally UP
- Assign MAC Address D3: 00:03:02:03:04:01
- Assign Default VLAN IP address: 12.0.0.3

**Switch D:**

- Create interface P1 and make it operationally UP
- Assign MAC Address D4: 00:04:02:03:04:01
- Assign Default VLAN IP address: 12.0.0.4

## LLDP-MED TOPOLOGY

Figure 3: LLDP-MED Topology

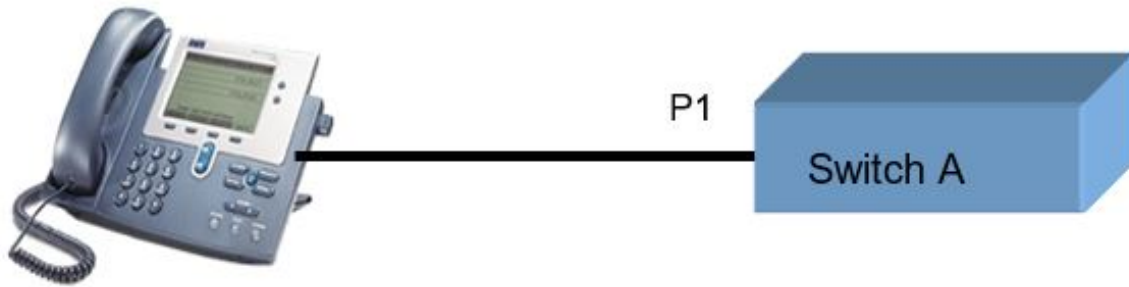


### Switch A:

- Create interface P1 and make it operationally UP
- Assign MAC (Media Access Control) Address: 00:01:02:03:04:01
- Assign Default VLAN (Virtual Local Area Network) IP (Internet Protocol) address: 12.0.0.1

## Tagged LLDP TOPOLOGY

Figure 4: Tagged LLDP Topology

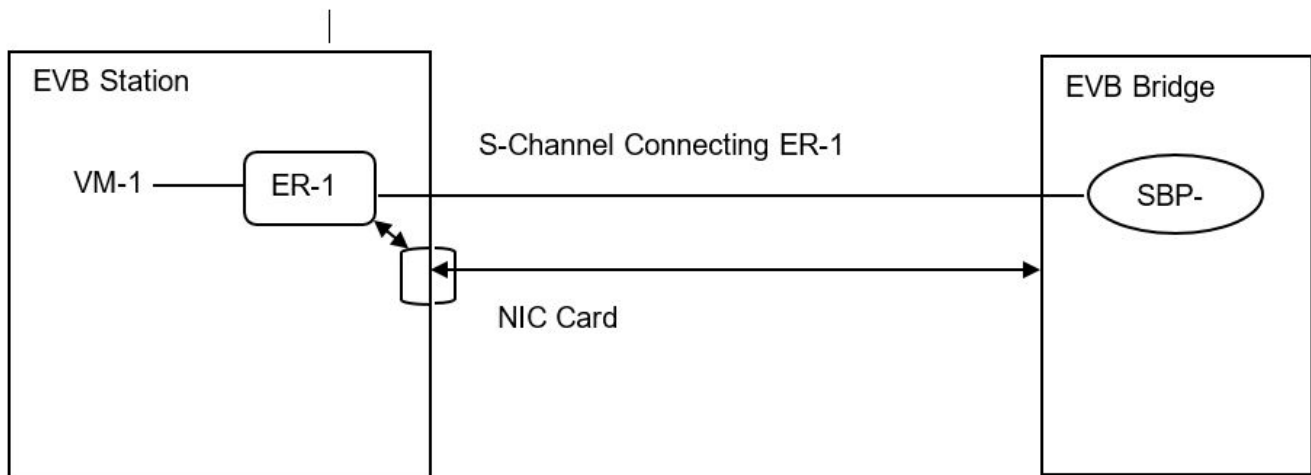

## 3.2. Configuration Guidelines

The guidelines for the configuration of *LLDP* are as follows:

- 1) *LLDP* System Control Status must be with **Start** setup before making further *LLDP* configuration.
- 2) For a particular *VLAN*, *VLAN* name is configured before enabling its *VLAN* name for transmission.

- 3) At least one IP interface must be created and is operational, before enabling management address *TLV* (Type, Length, Value) for transmission and before configuring the chassis ID (Identifier) subtype as **nw-addr**.
- 4) For Management address *TLV*, *VLAN* name *TLV*, and Port and Protocol *VLAN* ID *TLVs*, an option is provided in corresponding names and Protocol groups. New Management address, *VLAN* name or Protocol group configured after enabling the transmission of the corresponding *TLVs* is not transmitted automatically. The newly configured Management address, *VLAN* name or Protocol group must be enabled for transmission using the *CLI* command that is provided for enabling a particular Management address, *VLAN* name, or Protocol group.

### 3.3. Default Configurations

The table shows the default *LLDP* configuration.

Parameter	Default Setting	Note
<i>LLDP</i> System Control Status	Start	
<i>LLDP</i> Module Status	Disabled	
<i>LLDP</i> Message Transmit Interval	30	
<i>LLDP</i> Hold-time Multiplier	4	
<i>LLDP</i> Re-Initialization Delay	2	
<i>LLDP</i> Tx-Delay	2	
<i>LLDP</i> Notification Interval	5	
<i>LLDP</i> Chassis ID subtype	MAC Address	
<i>LLDP</i> Chassis ID	MAC Address of Default <i>VLAN</i>	

## LLDP Port Specific Configuration Objects

Parameter	Default Setting	Note
LLDP Port ID subtype	Interface Alias	
LLDP Port ID	Interface Alias of the port	
LLDP Admin Status	Transmit And Receive (TxAndRx)	
LLDP Notification Status	Disabled	
LLDP Notification Type	Mis-Configuration Notification Type	
Optional TLVs transmission status	Disabled	
LLDP Trace Input	Critical trace is enabled	

Optional TLVs include the following

- Basic Optional TLVs
- IEEE 802.1 Organizationally Specific TLVs and
- IEEE 802.3 Organizationally Specific TLVs

## 3.4. Starting and Shutting down LLDP

This section describes how to start and shut down the *LLDP*. *LLDP* System Control status must be in Start state for making any configurations in *LLDP*.

CONTEXT: At Switch A:

1. *LLDP* System Control status is set to **Start** by default. Shut down *LLDP* by executing the following commands.

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Shut down *LLDP*.

```
iS5comm(config)# shutdown lldp
```

- Exit the Global Configuration Mode

```
iS5comm(config)# exit
```

- View the *LLDP* system control status by executing the following command

```
iS5comm# show lldp
```

```
% Lldp Module is shutdown
```

2. After shutting it down, start *LLDP* by executing the following commands.

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
-   Start LLDP.
iS5comm(config)# no shutdown lldp
-   Exit the Global Configuration Mode
iS5comm(config)# exit
```

**NOTE:** Once *LLDP* System Control status is set to **Start**, *LLDP* global configuration objects are set with default values.

- View the *LLDP* system control status by executing the following command

```
iS5comm# show lldp
LLDP is disabled
Transmit Interval           : 30
Holdtime Multiplier         : 4
Reinitialization Delay      : 2
Tx Delay                    : 2
Notification Interval       : 5
Chassis Id SubType          : Mac Address
Chassis Id                  : e8:e8:75:90:5f:81
LLDP Tag Status             : disabled
Configured Management Ipv4 Address : 0.0.0.0
Configured Management Ipv6 Address : ::
```

## 3.5. Enabling LLDP

This section describes the configuration of *LLDP* Module status, which is set to Disabled by default.

CONTEXT: At Switch A and Switch B:

1. Enable *LLDP* by executing the following commands.

FOR EXAMPLE: Type the following:

```
-   Enter the Global Configuration Mode.
iS5comm# configure terminal
-   Enable LLDP.
iS5comm(config)# set lldp enable
-   Exit the Global Configuration Mode.
iS5comm(config)# exit
-   View the LLDP module status by executing the following command.
iS5comm# show lldp
LLDP is enabled
LLDP Version                : v1
Transmit Interval           : 30
Holdtime Multiplier         : 4
```

```

Reinitialization Delay      : 2
Tx Delay                    : 2
Notification Interval       : 5
Chassis Id SubType          : Mac Address
Chassis Id                  : e8:e8:75:90:5f:81
LLDP Tag Status             : disabled
Configured Management Ipv4 Address : 0.0.0.0
Configured Management Ipv6 Address : ::

```

**NOTE:** Enabling of *LLDP* (that is Configuring *LLDP* module status as Enabled) initiates the transmission of *LLDPDUs* (LLDP Data Units) with mandatory *TLVs* (Chassis-ID TLV, Port-ID TLV, TTL (Time To Live) TLV and End of LLDPDU TLV) on all ports that are operationally UP.

- View the current status of the *LLDP* Transmit State Event Machine and Receive State Event machine by executing the following command

```
iS5comm# show lldp interface
```

```
Gi0/1:
```

```

Tx State      : Enabled
Rx State      : Enabled
Tx SEM State   : INITIALIZE
Rx SEM State   : WAIT PORT OPERATIONAL
Notification Status : Disabled
Notification Type : Mis-configuration
DestinationMacAddr : 01:80:c2:00:00:0e

```

```
iS5comm# show lldp local
```

```
Capability Codes :
```

```

(R) Router, (B) Bridge, (T) Telephone, (C) DOCSIS Cable Device,
W) WLAN Access Point, (P) Repeater, (S) Station, (O) Other

```

```

Chassis Id SubType      : Mac Address
Chassis Id              : e8:e8:75:90:5f:81
System Name             : iS5com
System Description      : RAPTOR iMX950, iBiome 1.5.03
System Capabilities Supported : B,R
System Capabilities Enabled  : B,R

```

```
-LLDP-MED Info
```

```
Device Class      : Network Connectivity
```

```
LLDP-MED Inventory Info
```

```
Hardware Revision      : 1531-0001-B05
```

```

Firmware Revision      : 6.7.2
Software Revision      : 6.2.0
Serial Number          :
Manufacturer Name      : iS5Com
Model Name             :
Asset Id               : DummyId

```

## LLDP-MED PoE Info

```

Power Device Type      : PSE Device
Power Source           : Primary

```

## Gi0/1 :

```

Port Id SubType        : Interface Alias
Port Id                : Gi0/1
Port Description       : Ethernet Interface Port 01
Enabled Tx Tlvs        : Port Description, System Name,
System Description, System Capability,
Management Address

```

## Extended 802.3 TLV Info

## -MAC PHY Configuration &amp; Status

```

Auto-Neg Support & Status : Not Supported, Enabled
Advertised Capability Bits : 0000
Operational MAU Type      : 0
-Link Aggregation
Capability & Status       : Not Capable, Not In Aggregation
Aggregated Port Id       : 0
-Maximum Frame Size      : 1500

```

## Extended 802.1 TLV Info

```
-Port VLAN Id          : 1
```

## -Port &amp; Protocol VLAN Id

Protocol VLAN Id	Support	Protocol VLAN Status	TxStatus
0	Supported	Enabled	Disabled

## -Vlan Name

Vlan Id	Vlan Name	TxStatus
Disabled		-----1

```
LLDP-MED Admin Status : Disabled
```



```

-LLDP-MED Capability TLV
LLDP-MED Tx Supported      : MedCapability, NetworkPolicy,
LocationIdentity,
Ex-PowerViaMDI-PSE, Inventory
LLDP-MED Tx Enabled       :

-LLDP-MED Network Policy TLV
Application Type           :
Unknown Policy Flag       :
VlanType                  :
VlanID                    :
Priority                   :
Dscp                      :

-LLDP-MED Location TLV Info
Location Subtype          :
Location Info             :

-LLDP-MED Ex-PowerViaMDI TLV Info
Power Priority             : Critical
Power Value               : 1000

```

```

-----

iS5comm# show lldp traffic
Total Frames Out          : 746
Total Tagged Frames Out   : 0
Total Entries Aged        : 0
Total Frames In           : 30
Total Frames Received In Error : 0
Total Frames Discarded    : 0
Total TLVS Unrecognized   : 0
Total TLVS Discarded      : 0
Total PDU length error Drops : 0
Total LLDP-MED Frames Out : 0
Total LLDP-MED Frames In  : 0
Total LLDP-MED Frames Discarded : 0
Total LLDP-MED TLVs Discarded : 29
Total Media Capability TLVs Discarded : 29
Total Network Policy TLVs Discarded : 0
Total Inventory TLVs Discarded : 0

```

```

Total Location TLVs Discarded      : 0
Total Ex-PowerViaMDI TLVs Discarded : 0
Med-Capability TLV Discard Reason  : Not Applicable
Nw-Policy TLV Discard Reason       : Not Applicable
Inventory TLV Discard Reason        : Not Applicable
Location-ID TLV Discard Reason      : Not Applicable
Ex-PowerViaMDI TLV Discard Reason   : Not Applicable

```

## 2. At Switch B:

- View the brief information about the neighbors by executing the following command.

```
iS5comm# show lldp neighbors
```

Capability Codes:

(R) Router, (B) Bridge, (T) Telephone, (C) DOCSIS Cable Device,  
(W) WLAN Access Point, (P) Repeater, (S) Station, (O) Other

Chassis ID	Local Intf	Hold-time	Capability	Port Id
-----	-----	-----	-----	-----
a8:74:1d:87:e3:ee	Gi0/2	120	B,R	Gi0/20

Total Entries Displayed: 1

- View the information about a particular remote entry (particular neighbor) using MSAP (MAC service Access Point) ID by executing the following command

```
iS5comm# show lldp neighbors chassis-id 00:01:02:03:04:01 port-id Slot0/1
detail
```

Capability Codes:

(R) Router, (B) Bridge, (T) Telephone, (C) DOCSIS Cable Device,  
(W) WLAN Access Point, (P) Repeater, (S) Station, (O) Other

Chassis Id SubType: Mac Address

Chassis Id : e8:e8:75:90:0b:01

Port Id SubType: Interface Alias

Port Id: Slot0/1

Port Description: Not Advertised

System Name: Not Advertised

System Desc: Not Advertised

Local Intf: Gi0/1

Time Remaining: 101 Seconds

System Capabilities Tlv: Not Advertised

Management Address: Not Advertised

Extended 802.3 TLV Info

-MAC PHY Configuration & Status

Auto Negotiation Tlv: Not Advertised

```
-Link Aggregation
Link Aggregation Tlv: Not Advertised
-Maximum Frame Size Tlv: Not Advertised
Extended 802.1 TLV Info
-Port VLAN Tlv: Not Advertised
-Port & Protocol VLAN Id
Protocol Vlan Tlv: Not Advertised
-Vlan Name
Vlan Name Tlv: Not Advertised
```

```
-----
Total Entries Displayed: 1
```

– **View the remote table statistics by executing the following command**

```
iS5comm# show lldp statistics
Remote Table Last Change Time: 20700
Remote Table Inserts: 1
Remote Table Deletes: 0
Remote Table Drops: 0
Remote Table Ageouts: 0
Remote Table Updates: 0
```

3. **Disable *LLDP* by executing the following commands**

FOR EXAMPLE: At Switch A and Switch B:

– **Enter the Global Configuration Mode.**

```
iS5comm# configure terminal
```

– **Disable *LLDP*.**

```
iS5comm(config)# set lldp disable
```

– **Exit the Global Configuration Mode**

```
iS5comm(config)# exit
```

– **At Switch A: View the *LLDP* module status using the following command.**

```
iS5comm# show lldp
LLDP is disabled
Transmit Interval: 30
Holdtime Multiplier: 4
Reinitialization Delay: 2
Tx Delay: 2
Notification Interval: 5
Chassis Id SubType: Mac Address
```

Chassis Id: 00:01:02:03:04:01

- View the current status of the *LLDP* Transmit State Event Machine and Receive State Event machine by executing the following command.

```
iS5comm# show lldp interface
Gi0/1:
Tx State: Enabled
Rx State: Enabled
Tx SEM State: INITIALIZE
Rx SEM State: INITIALIZE
Notification Status: Disabled
Notification Type: Mis-configuration
```

```
iS5comm# show lldp traffic
Total Frames Out: 0
Total Entries Aged: 0
Total Frames In: 0
Total Frames Received In Error: 0
Total Frames Discarded: 0
Total TLVS Unrecognized: 0
Total TLVs Discarded: 0
```

#### At Switch B:

- View the information about the neighbors by executing the following command.

```
iS5comm# show lldp neighbors
Capability Codes:
(R) Router, (B) Bridge, (T) Telephone, (C) DOCSIS Cable Device,
(W) WLAN Access Point, (P) Repeater, (S) Station, (O) Other
Chassis IDLocal IntfHold-timeCapabilityPort Id
-----
Total Entries Displayed: 0
```

**NOTE:** Disabling of *LLDP* (i.e. configuring *LLDP* module status as Disabled) stops *LLDP* transmission and reception and clears remote table information and *LLDP* traffic counters.

## 3.6. LLDP Global Configuration

This section describes configuration of *LLDP* global objects. These global objects are system-specific objects, which is common for all interfaces in the system.

CONTEXT: At Switch A:

1. Change the global configuration of *LLDP* by executing the following commands.

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Enable *LLDP* Global Configuration.

```
iS5comm(config)# lldp transmit-interval 15
```

```
iS5comm(config)# lldp holdtime-multiplier 2
```

```
iS5comm(config)# lldp reinitialization-delay 5
```

```
iS5comm(config)# lldp tx-delay 3
```

```
iS5comm(config)# lldp notification-interval 10
```

```
iS5comm(config)# lldp chassis-id-subtype local "switch"
```

- Exit the Global Configuration Mode.

```
iS5comm(config)# exit
```

- View the *LLDP* system control status by executing the following command.

```
iS5comm# show lldp
```

LLDP is enabled

LLDP Version : v1

Transmit Interval : 15

Holdtime Multiplier : 2

Reinitialization Delay : 5

Tx Delay : 3

Notification Interval : 10

Chassis Id SubType : Local

Chassis Id : switch

LLDP Tag Status : disabled

Configured Management Ipv4 Address : 0.0.0.0

Configured Management Ipv6 Address : ::

2. Reset the Global Configuration of *LLDP* to default values by executing the following commands.

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Enable *LLDP* Global Configuration.

```
iS5comm(config)# no lldp transmit-interval
```

```
iS5comm(config)# no lldp holdtime-multiplier
```

```

iS5comm(config)# no lldp reinitialization-delay
iS5comm(config)# no lldp tx-delay
iS5comm(config)# no lldp notification-interval
iS5comm(config)# lldp chassis-id-subtype mac-addr
-   Exit the Global Configuration Mode
iS5comm(config)# exit
-   View the LLDP status by executing the following command.
iS5comm# show lldp
LLDP is enabled
LLDP Version                : v1
Transmit Interval           : 30
Holdtime Multiplier         : 4
Reinitialization Delay      : 2
Tx Delay                    : 2
Notification Interval       : 5
Chassis Id SubType          : Mac Address
Chassis Id                  : e8:e8:75:90:5f:81
LLDP Tag Status             : disabled
Configured Management Ipv4 Address : 0.0.0.0
Configured Management Ipv6 Address : ::

```

### 3.7. Configuring LLDP Admin Status

**CONTEXT:** This section describes the configuration of *LLDP* Admin Status, which is set to TxAndRx (Transmit And Receive) by default. The *LLDP* Admin Status is changed to change *LLDP* operational mode. *LLDP* Admin Status can be configured to any of the following values:

- TxAndRx (Default) - Transmit And Receive
- TxOnly - Transmit Only
- RxOnly - Receive Only
- Disabled

1. Shut down *LLDP* by executing the following commands.

**FOR EXAMPLE:** Type the following:

- **At Switch A and Switch B:** view the *LLDP* system control status by executing the following command

```

iS5comm# show lldp interface
Gi0/1:
Tx State                : Enabled
Rx State                : Enabled
Tx SEM State            : INITIALIZE

```

```

Rx SEM State      : WAIT PORT OPERATIONAL
Notification Status : Disabled
Notification Type  : Mis-configuration
DestinationMacAddr : 01:80:c2:00:00:0e

```

## 2. Configure *LLDP* Admin Status by executing the following commands.

FOR EXAMPLE: At Switch A:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Configure *LLDP* admin status as Transmit Only (TxOnly).

```

iS5comm(config)# interface gigabitethernet 0/1
iS5comm(config-if)# no lldp receive
iS5comm(config-if)# exit

```

- Exit the Global Configuration Mode

```
iS5comm(config)# exit
```

- View the *LLDP* admin status by executing the following command

```

iS5comm# show lldp interface gigabitethernet 0/1
Gi0/1:

```

```

Tx State          : Enabled
Rx State          : Disabled
Tx SEM State      : INITIALIZE
Rx SEM State      : WAIT PORT OPERATIONAL
Notification Status : Disabled
Notification Type  : Mis-configuration
DestinationMacAddr : 01:80:c2:00:00:0e

```

FOR EXAMPLE: At Switch B:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Configure *LLDP* admin status as Receive Only (RxOnly).

```

iS5comm(config)# interface gigabitethernet 0/1
iS5comm(config-if)# no lldp transmit

```

- Exit the Global Configuration Mode

```
iS5comm(config)# exit
```

- View the *LLDP* admin status by executing the following command

```

iS5comm# show lldp interface gigabitethernet 0/1
Gi0/1:

```

```

Tx State          : Disabled
Rx State          : Enabled
Tx SEM State      : INITIALIZE
Rx SEM State      : Enabled

```

```
Notification Status : Disabled
Notification Type   : Mis-configuration
```

### 3. Set *LLDP* Admin Status to Disabled by executing the following commands

FOR EXAMPLE: At Switch A and Switch B:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Configure *LLDP* Admin Status as Disabled.

```
iS5comm(config)# interface gigabitethernet 0/1
```

```
iS5comm(config-if)# no lldp transmit
```

```
iS5comm(config-if)# no lldp receive
```

```
iS5comm(config-if)# exit
```

- Exit the Global Configuration Mode

```
iS5comm(config)# exit
```

- View the *LLDP* Admin Status by executing the following command.

```
iS5comm# show lldp interface gigabitethernet 0/1
```

```
Gi0/1:
```

```
Tx State           : Disabled
```

```
Rx State           : Disabled
```

```
Tx SEM State       : INITIALIZE
```

```
Rx SEM State       : INITIALIZE
```

```
Notification Status : Disabled
```

```
Notification Type   : Mis-configuration
```

## 3.8. Enabling LLDP Basic Optional TLVs

CONTEXT:

At Switch A:

This section describes the configuration of the basic optional *TLVs*, whose transmission status is set to Disabled by default. They are as follows:

- Port Description
- System Name
- System Description
- System Capabilities
- Management Address

At Switch A and Switch B:



**NOTE:** Configure the *LLDP* module status as enabled. Refer to section “Enabling LLDP” for configuring *LLDP* module status.

1. Enable basic optional *TLVs* by executing the following commands.

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Configure the basic optional *TLVs*, where “basic-tlv” stands for selecting configuring the basic optional *TLVs*.

```
iS5comm(config)# interface gigabitethernet 0/1
```

```
iS5comm(config-if)# lldp tlv-select basic-tlv port-descr
```

```
iS5comm(config-if)# lldp tlv-select basic-tlv sys-name
```

```
iS5comm(config-if)# lldp tlv-select basic-tlv sys-descr
```

```
iS5comm(config-if)# lldp tlv-select basic-tlv sys-capab
```

```
iS5comm(config-if)# lldp tlv-select basic-tlv mgmt-addr all
```

- Exit the Interface Configuration Mode

```
iS5comm(config-if)# end
```

2. **At Switch A**, view the *LLDP* system control status by executing the following command

FOR EXAMPLE: `iS5comm# show lldp local gigabitethernet 0/1`

```
Port Id SubType           : Interface Alias
```

```
Port Id                   : Gi0/1
```

```
Port Description          : Ethernet Interface Port 01
```

```
Enabled Tx Tlvs          : Port Description, System Name,  
System Description, System Capability,  
Management Address
```

```
Extended 802.3 TLV Info
```

```
-MAC PHY Configuration & Status
```

```
Auto-Neg Support & Status : Not Supported, Enabled
```

```
Advertised Capability Bits : 0000
```

```
Operational MAU Type      : 0
```

```
-Link Aggregation
```

```
Capability & Status       : Not Capable, Not In Aggregation
```

```
Aggregated Port Id       : 0
```

```
-Maximum Frame Size      : 1500
```

```
Extended 802.1 TLV Info
```

```
-Port VLAN Id            : 1
```

```
-Port & Protocol VLAN Id
```

```
Protocol VLAN Id      Support      Protocol VLAN Status      TxStatus
```

```
-----
```

0	Supported	Enabled	Disabled
-Vlan Name			
Vlan Id	Vlan Name		TxStatus
-----	-----		-----
1			Disabled

```

LLDP-MED Admin Status      : Disabled-LLDP-MED Capability TLV
LLDP-MED Tx Supported      : MedCapability, NetworkPolicy,
LocationIdentity,
Ex-PowerViaMDI-PSE, Inventory
LLDP-MED Tx Enabled        :

```

```
-LLDP-MED Network Policy TLV
```

```

Application Type           :
Unknown Policy Flag        :
VlanType                   :
VlanID                     :
Priority                   :
Dscp                       :

```

```
-LLDP-MED Location TLV Info
```

```

Location Subtype           :
Location Info              :

```

```
-LLDP-MED Ex-PowerViaMDI TLV Info
```

```

Power Priority              : Critical
Power Value                 : 1000

```

```
is5comm# show lldp local mgmt-addr
```

```
Management AddressTxEnabledPorts
```

```
-----
12.0.0.1 Gi0/1
```

- At Switch B, view the information about neighbors learnt by executing the following command.

FOR EXAMPLE: Perform the following.

```
is5comm# show lldp neighbors gigabitethernet 0/1 detail
```

Capability Codes:

(R) Router, (B) Bridge, (T) Telephone, (C) DOCSIS Cable Device,  
(W) WLAN Access Point, (P) Repeater, (S) Station, (O) Other

Chassis Id SubType: Mac Address

```

Chassis Id: E8:E8:75:90:5F:81
Port Id SubType: Interface Alias
Port Id: Gi0/1
Port Description: Ethernet Interface Port 01
System Name : iS5com
System Description : RAPTOR iMX 950, iBiome :1.5.03
Local Intf: Gi0/1
Time Remaining: 96 Seconds
System Capabilities Supported: B,RSystem Capabilities Enabled: B,R
Management Addresses:
IfId SubType Address OID
-----
1009 IPv4 12.0.0.11 3 6 1 2 1 2 2 1 1

Extended 802.3 TLV Info
-MAC PHY Configuration & Status
Auto Negotiation Tlv: Not Advertise
-Link Aggregation
Link Aggregation Tlv: Not Advertised
-Maximum Frame Size Tlv: Not Advertised

Extended 802.1 TLV Info
-Port VLAN Tlv: Not Advertised
-Port & Protocol VLAN Id
Protocol Vlan Tlv: Not Advertised
-Vlan NameVlan Name Tlv: Not Advertised
-----
Total Entries Displayed : 1

```

### 3.9. Enabling IEEE 802.1 Organizationally Specific TLVs

#### CONTEXT:

This section describes how to enable IEEE 802.1 organizationally-specific *TLVs*, whose transmission status is set to Disabled by default. They are as follows:

- Port *VLAN* ID
- *VLAN* name
- Port and Protocol *VLAN* ID (*PPVID*)

**At Switch A and Switch B:**

**NOTE:** Configure the *LLDP* module status as enabled. Refer to section “Enabling LLDP” for details.

1. Configure *VLAN* name as *vlan1* by executing the following commands.

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Configure *VLAN* name as *vlan1*.

```
iS5comm(config)# vlan 1
```

```
iS5comm(config-vlan)# ports gigabitethernet 0/1
```

```
iS5comm(config-vlan)# name vlan1
```

```
iS5comm(config-vlan)# end
```

2. Enable IEEE 802.1 Organizationally Specific *TLVs* by executing the following commands.

FOR EXAMPLE: Perform the following.

Type the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Enable IEEE 802.1 Organizationally Specific *TLVs*.

```
iS5comm(config)# interface gigabitethernet 0/1
```

The parameter to be used in the next command are:

- *tlv-select*—for configuring *TLVs*
- *dot1tlv*— enter this to continue configuring *vlanname*, *PVID*, etc.

```
iS5comm(config-if)# lldp tlv-select dot1tlv protocol-vlan-id all
```

```
iS5comm(config-if)# lldp tlv-select dot1tlv vlan-name all
```

```
iS5comm(config-if)# lldp tlv-select dot1tlv port-vlan-id
```

```
iS5comm(config-if)# end
```

3. Verify the configuration of the additional *TLVs* - see Extended 802.1 *TLV* Info section.

FOR EXAMPLE: Perform the following:

```
iS5comm# show lldp local gigabitethernet 0/1
```

```
Port Id SubType           : Interface Alias
```

```
Port Id                   : Gi0/1
```

```
Port Description          : Ethernet Interface Port 01
```

```
Enabled Tx Tlvs           : Port Description, System Name,
```

```
System Description, System Capability, Management Address, Port Vlan
```

Extended 802.3 TLV Info

-MAC PHY Configuration & Status

```
Auto-Neg Support & Status : Not Supported, Enabled
```

```
Advertised Capability Bits : 0000
```

```
Operational MAU Type      : 0
```

```

-Link Aggregation
Capability & Status           : Not Capable, Not In Aggregation
Aggregated Port Id           : 0
-Maximum Frame Size           : 1500

Extended 802.1 TLV Info
Port VLAN Id                  : 1
-Port & Protocol VLAN Id

Protocol VLAN Id      Support      Protocol VLAN Status      TxStatus
-----
0                     Supported    Enabled                     Disabled

-Vlan Name
Vlan Id      Vlan Name      TxStatus
-----
1            vlan1          Enabled

```

## Enabling Particular VLAN Name

*VLAN* name *TLV* transmission status is Disabled by default. That is if a new *VLAN* with configured *VLAN* name or the existing *VLAN* name is changed, the *TLV* transmission status of the *VLAN* name is Disabled by default.

### NOTE: Scenario 1:

If a new *VLAN* is configured with *VLAN* name, *VLAN* name is not transmitted by default (that is the *TLV* transmission status of the newly configured *VLAN* is Disabled).

1. At Switch A: Create *VLAN* with *VLAN* ID as 2 and interface gigabitethernet 0/1 as member port. Configure *VLAN* name as vlan2.

FOR EXAMPLE:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Configure *VLAN* name as vlan2.

```
iS5comm(config)# vlan 2
```

```
iS5comm(config-vlan)# ports gigabitethernet 0/1
```

```
iS5comm(config-vlan)# name vlan2
```

```
iS5comm(config-vlan)# end
```

- View the *TLV* transmission status of the *VLAN* names in the local system information by executing the following command.

FOR EXAMPLE: iS5comm# show lldp local gigabitethernet 0/1

```
Port Id SubType           : Interface Alias
```

```

Port Id                               : Gi0/1
Port Description                       : Ethernet Interface Port 01
Enabled Tx Tlvs                     : Port Description, System Name,
System Description, System Capability,
Management Address

Extended 802.3 TLV Info
-MAC PHY Configuration & Status
Auto-Neg Support & Status             : Not Supported, Enabled
Advertised Capability Bits            : 0000
Operational MAU Type                 : 0
-Link Aggregation
Capability & Status                   : Not Capable, Not In Aggregation
Aggregated Port Id                   : 0
-Maximum Frame Size                  : 1500

Extended 802.1 TLV Info
-Port VLAN Id                        : 1
-Port & Protocol VLAN Id
Protocol VLAN Id      Support      Protocol VLAN Status      TxStatus
-----
0                     Supported    Enabled                  Disabled
-Vlan Name
Vlan Id      Vlan Name      TxStatus
-----
1            vlan1          Enabled
2            vlan2          Disabled

LLDP-MED Admin Status                : Disabled-LLDP-MED Capability TLV
LLDP-MED Tx Supported                : MedCapability, NetworkPolicy,
LocationIdentity,
Ex-PowerViaMDI-PSE, Inventory
LLDP-MED Tx Enabled                  :

-LLDP-MED Network Policy TLV
Application Type                      :
Unknown Policy Flag                   :
VlanType                             :
VlanID                               :
Priority                              :

```

```

Dscp                                     :

-LLDP-MED Location TLV Info
Location Subtype                       :
Location Info                         :

-LLDP-MED Ex-PowerViaMDI TLV Info
Power Priority                         : Critical
Power Value                           : 1000

```

```

-----
iS5comm# show lldp local mgmt-addr
Management AddressTxEnabledPorts
-----

```

```
12.0.0.1 Gi0/1
```

**NOTE:** see above that the TxStatus for VLAN2 is disabled.

- Enable IEEE 802.1 Organizationally Specific TLVs by executing the following commands.

FOR EXAMPLE: perform the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Enable the configured VLAN name (vlan2) for transmission by executing the following commands.

```

iS5comm(config)# interface gigabitethernet 0/1
iS5comm(config-if)# lldp tlv-select dot1tlv vlan-name 2
iS5comm(config-vlan)# end

```

- View the TLV transmission status of the VLAN names in the local system information by executing the following command.

FOR EXAMPLE: Perform the following:

```

iS5comm# show lldp local gigabitethernet 0/1
Port Id SubType                       : Interface Alias
Port Id                               : Gi0/1
Port Description                       : Ethernet Interface Port 01
Enabled Tx Tlvs                     : Port Description, System Name,
System Description, System Capability,
Management Address

```

```

Extended 802.3 TLV Info
-MAC PHY Configuration & Status
Auto-Neg Support & Status             : Not Supported, Enabled
Advertised Capability Bits            : 0000
Operational MAU Type                  : 0

```

```

-Link Aggregation
Capability & Status           : Not Capable, Not In Aggregation
Aggregated Port Id           : 0
-Maximum Frame Size           : 1500

Extended 802.1 TLV Info
-Port VLAN Id                 : 1
-Port & Protocol VLAN Id
Protocol VLAN Id      Support      Protocol VLAN Status      TxStatus
-----
0                     Supported    Enabled                  Disabled
-Vlan Name
Vlan Id      Vlan Name      TxStatus
-----
1            vlan1          Enabled
2            vlan2          Enabled

LLDP-MED Admin Status           : Disabled-LLDP-MED Capability TLV
LLDP-MED Tx Supported           : MedCapability, NetworkPolicy,
LocationIdentity,
Ex-PowerViaMDI-PSE, Inventory
LLDP-MED Tx Enabled             :

-LLDP-MED Network Policy TLV
Application Type                 :
Unknown Policy Flag              :
VlanType                         :
VlanID                           :
Priority                         :
Dscp                             :

-LLDP-MED Location TLV Info
Location Subtype                 :
Location Info                    :

-LLDP-MED Ex-PowerViaMDI TLV Info
Power Priority                   : Critical
Power Value                     : 1000
-----
iS5comm# show lldp local mgmt-addr

```



Management Address	TxEnabledPorts
-----	-----
12.0.0.1	Gi0/1

**NOTE:** see above that both VLAN 1 and VLAN2 have “Enabled” TxStatus.

- At Switch B, view the neighbor information learnt on interface gigabitethernet 0/1, by executing the following command.

FOR EXAMPLE: perform the following:

```
iS5comm# show lldp neighbors gigabitethernet 0/1 detail
```

Capability Codes:

(R) Router, (B) Bridge, (T) Telephone, (C) DOCSIS Cable Device,  
(W) WLAN Access Point, (P) Repeater, (S) Station, (O) Other

Chassis Id SubType: Mac Address

Chassis Id: E8:E8:75:90:5F:81

Port Id SubType: Interface Alias

Port Id: Gi0/1

Port Description: Ethernet Interface

System Name : iS5com

System Description : RAPTOR iMX 950, iBiome :1.5.03

Local Intf: Gi0/1

Time Remaining: 116 Seconds

System Capabilities Supported: B,R

System Capabilities Enabled: B,R

Extended 802.3 TLV Info

-MAC PHY Configuration & Status

Auto-Neg Support & Status : Not Supported, Enabled

Advertised Capability Bits : 0000

Operational MAU Type : 0

-Link Aggregation

Capability & Status : Not Capable, Not In Aggregation

Aggregated Port Id : 0

-Maximum Frame Size : 1500

Extended 802.1 TLV Info

-Port VLAN Id : 1

-Port & Protocol VLAN Id

Protocol VLAN Id	Support	Protocol VLAN Status	TxStatus
-----	-----	-----	-----

0	Supported	Enabled	Disabled
-Vlan Name			
Vlan Id	Vlan Name	TxStatus	
-----	-----	-----	
1	vlan1	Enabled	
2	vlan2	Enabled	

**NOTE: Scenario 2:**

We are going to delete the *VLAN* whose name is enabled for transmission, and then, view the configuration information.

3. Delete VLAN whose name is enabled for transmission and view the local system information and neighbor's detail.

FOR EXAMPLE: Perform the following:

At Switch A:

- Delete VLAN 2 by executing the following commands.

```
iS5comm# configure terminal
iS5comm(config)# no vlan 2
iS5comm(config)# end
```

- View the local system information by executing the following command.

```
iS5comm# show lldp local gigabitethernet 0/1
Port Id SubType           : Interface Alias
Port Id                   : Gi0/1
Port Description          : Ethernet Interface Port 01
Enabled Tx Tlvs           : Port Description, System Name,
System Description, System Capability,
Management Address
```

Extended 802.3 TLV Info

-MAC PHY Configuration & Status

```
Auto-Neg Support & Status : Not Supported, Enabled
Advertised Capability Bits : 0000
Operational MAU Type      : 0
```

-Link Aggregation

```
Capability & Status       : Not Capable, Not In Aggregation
Aggregated Port Id       : 0
-Maximum Frame Size      : 1500
```

Extended 802.1 TLV Info

```
Port VLAN Id             : 1
```

-Port & Protocol VLAN Id

Protocol VLAN Id	Support	Protocol VLAN Status	TxStatus
-----	-----	-----	-----
0	Supported	Enabled	Disabled

-Vlan Name

Vlan Id	Vlan Name	TxStatus
-----	-----	-----
1	vlan1	Enabled

**NOTE:** The entry corresponding to VLAN 2 is not displayed anymore.

At Switch B:

- View the neighbor information learnt on interface gigabitethernet 0/1, by executing the following command.

```
iS5comm# show lldp neighbors gigabitethernet 0/1 detail
```

Capability Codes:

(R) Router, (B) Bridge, (T) Telephone, (C) DOCSIS Cable Device,  
(W) WLAN Access Point, (P) Repeater, (S) Station, (O) Other

Chassis Id SubType: Mac Address

Chassis Id: E8:E8:75:90:5F:81

Port Id SubType: Interface Alias

Port Id: Gi0/1

Port Description: Ethernet Interface

System Name : iS5com

System Description : RAPTOR iMX 950, iBiome :1.5.03

Local Intf: Gi0/1

Time Remaining: 116 Seconds

System Capabilities Supported: B,R

System Capabilities Enabled: B,R

Extended 802.3 TLV Info

-MAC PHY Configuration & Status

Auto-Neg Support & Status : Not Supported, Enabled

Advertised Capability Bits : 0000

Operational MAU Type : 0

-Link Aggregation

Capability & Status : Not Capable, Not In Aggregation

Aggregated Port Id : 0

```
-Maximum Frame Size           : 1500
```

```
Extended 802.1 TLV Info
```

```
Port VLAN Id                  : 1
```

```
-Port & Protocol VLAN Id
```

Protocol VLAN Id	Support	Protocol VLAN Status	TxStatus
-----	-----	-----	-----
0	Supported	Enabled	Disabled

```
-Vlan Name
```

Vlan Id	Vlan Name	TxStatus
-----	-----	-----
1	vlan1	Enabled

**NOTE:** The entry corresponding to VLAN 2 is not displayed anymore.

4. Recreate *VLAN* with *VLAN* ID as 2 and interface gigabitethernet 0/1 as member port, and configure *VLAN* name as vlan2 by executing the following command.

FOR EXAMPLE:

At Switch A

- Create *VLAN* with *VLAN* ID as 2 and interface gigabitethernet 0/1 as member port, and configure *VLAN* name as vlan2 by executing the following commands.

```
iS5comm# configure terminal
iS5comm(config)# vlan 2
iS5comm(config-vlan)# ports gigabitethernet 0/1
iS5comm(config-vlan)name vlan2
iS5comm(config-switch-vlan)# end
```

- View the TLV transmission status of the *VLAN* names in the local system information by executing the following command.

```
iS5comm# show lldp local gigabitethernet 0/1
Port Id SubType           : Interface Alias
Port Id                   : Gi0/1
Port Description          : Ethernet Interface Port 01
Enabled Tx Tlvs         : Port Description, System Name,
System Description, System Capability,
Management Address
```

```
Extended 802.3 TLV Info
```

```
-MAC PHY Configuration & Status
```

```
Auto-Neg Support & Status   : Not Supported, Enabled
Advertised Capability Bits  : 0000
Operational MAU Type       : 0
```

```

-Link Aggregation
Capability & Status           : Not Capable, Not In Aggregation
Aggregated Port Id           : 0
-Maximum Frame Size          : 1500

Extended 802.1 TLV Info
-Port VLAN Id                 : 1
-Port & Protocol VLAN Id
Protocol VLAN Id      Support      Protocol VLAN Status      TxStatus
-----
0                     Supported    Enabled                  Disabled
-Vlan Name
Vlan Id      Vlan Name      TxStatus
-----
1            vlan1          Enabled
2            vlan2          Disabled

```

**NOTE:** Vlan 2 is shown now.

## Enabling Particular PPVID

### CONTEXT:

Port and Protocol *VLAN ID (PPVID) TLV* transmission status is Disabled by default. That is if a new *PPVID* is configured, the *TLV* transmission status of the *VLAN* name is Disabled by default.

1. Create and map a protocol group to *VLAN 2*.

At Switch A:

**FOR EXAMPLE:** Create and map a protocol group 10 to *VLAN 2*, and view the *TLV* transmission status of the newly configured *PPVID TLV* in the local system information by executing the following commands.

```

- Enter the Global Configuration Mode.
iS5comm# configure terminal
- Create a protocol group 10.
iS5comm(config)# map protocol ip enet-v2 protocols-group 10
- Enter Interface Configuration Mode.
iS5comm(config)# interface gigabitethernet 0/1
- For the specified interface, map the protocol group 10 to a VLAN ID 2.
iS5comm(config-if)# switchport map protocols-group 10 vlan 2
iS5comm(config)# end
- View the configuration.
iS5comm# show lldp local gigabitethernet 0/1
Port Id SubType           : Interface Alias

```

```

Port Id                               : Gi0/1
Port Description                       : Ethernet Interface Port 01
Enabled Tx Tlvs                       : Port Description, System Name,
System Description, System Capability,
Management Address

Extended 802.3 TLV Info
-MAC PHY Configuration & Status
Auto-Neg Support & Status             : Not Supported, Enabled
Advertised Capability Bits            : 0000
Operational MAU Type                  : 0
-Link Aggregation
Capability & Status                   : Not Capable, Not In Aggregation
Aggregated Port Id                    : 0
-Maximum Frame Size                   : 1500

```

```

Extended 802.1 TLV Info
-Port VLAN Id                         : 1

Port & Protocol VLAN Id
Protocol VLAN Id      Support      Protocol VLAN Status      TxStatus
-----
2                      Supported   Enabled                     Disabled
-Vlan Name
Vlan Id      Vlan Name                      TxStatus
-----
1            vlan1                          Enabled
2            vlan2                          Disabled

```

**NOTE:** Protocol VLAN ID of 2 is displayed as supported, enabled and not transmitting.

2. Enable the transmission of protocol VLAN ID TLV by executing the following commands.
  - Enter the Global Configuration Mode.
 

```
iS5comm# configure terminal
```
  - Enter Interface Configuration Mode
 

```
iS5comm(config)# interface gigabitethernet 0/1
```
  - For the specified interface, enable the transmission of protocol VLAN ID TLV, where "port-vlan-id" stands for port VLAN identifier TLV.
 

```
iS5comm(config-if)# lldp tlv-select dot1tlv protocol-vlan-id 2
iS5comm(config)# end
```
  - View the configuration.
 

```
iS5comm# show lldp local gigabitethernet 0/1
```

```
Port Id SubType                : Interface Alias
```

```

Port Id                : Gi0/1
Port Description       : Ethernet Interface Port 01
Enabled Tx Tlvs        : Port Description, System Name,
System Description, System Capability,
Management Address

```

#### Extended 802.3 TLV Info

##### -MAC PHY Configuration & Status

```

Auto-Neg Support & Status : Not Supported, Enabled
Advertised Capability Bits : 0000
Operational MAU Type      : 0
-Link Aggregation
Capability & Status       : Not Capable, Not In Aggregation
Aggregated Port Id       : 0
-Maximum Frame Size      : 1500

```

#### Extended 802.1 TLV Info

```
-Port VLAN Id          : 1
```

#### Port & Protocol VLAN Id

Protocol VLAN Id	Support	Protocol VLAN Status	TxStatus
2	Supported	Enabled	Enabled

```

-Vlan Name
Vlan Id      Vlan Name      TxStatus
-----
1            vlan1          Enabled
2            vlan2          Disabled

```

**NOTE:** Protocol VLAN ID of 2 is displayed as supported, enabled and not transmitting.

- At Switch B, view the neighbor information learnt on interface gigabitethernet 0/1, by executing the following command

FOR EXAMPLE: perform the following

```
iS5comm# show lldp neighbors gigabitethernet 0/1 detail
```

Capability Codes:

(R) Router, (B) Bridge, (T) Telephone, (C) DOCSIS Cable Device, (W) WLAN  
Access Point, (P) Repeater, (S) Station, (O) Other

```

Chassis Id SubType: Mac Address
Chassis Id: E8:E8:75:90:5F:81
Port Id SubType: Interface Alias
Port Id: Gi0/1

```

```

Port Description: Ethernet Interface
System Name      : iS5com
System Description : RAPTOR iMX 950, iBiome :1.5.03

```

```

Local Intf: Gi0/1
Time Remaining: 116 Seconds
System Capabilities Supported: B,R
System Capabilities Enabled: B,R

```

```

Extended 802.3 TLV Info
-MAC PHY Configuration & Status
Auto Negotiation Tlv: Not Advertised
-Link Aggregation
Link Aggregation Tlv: Not Advertised
-Maximum Frame Size Tlv: Not Advertised
Extended 802.1 TLV Info
-Port VLAN Id: 1
-Port & Protocol VLAN Id

```

```

Protocol Vlan Id SupportStatus
-----

```

```

2 Supported Enabled

```

```

-Vlan Name

```

```

Vlan Id Vlan Name
-----

```

```

1 vlan1
-----

```

```

Total Entries Displayed: 1

```

#### 4. Delete the *PPVID* i.e. unmap the protocol group 10 in interface gigabitethernet 0/1.

FOR EXAMPLE: perform the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Enter Interface Configuration Mode

```
iS5comm(config)# interface gigabitethernet 0/1
```

- For the specified interface, unmap protocol group 10.

```
iS5comm(config-if)# no switchport map protocols-group 10
```

```
iS5comm(config)# end
```

- View the configuration.

```
iS5comm# show lldp local gigabitethernet 0/1
```

```
Port Id SubType      : Interface Alias
```



```

Port Id : Gi0/1
Port Description : Ethernet Interface Port 01
Enabled Tx Tlvs : Port Description, System Name,
System Description, System Capability,
Management Address

Extended 802.3 TLV Info
-MAC PHY Configuration & Status
Auto-Neg Support & Status : Not Supported, Enabled
Advertised Capability Bits : 0000
Operational MAU Type : 0
-Link Aggregation
Capability & Status : Not Capable, Not In Aggregation
Aggregated Port Id : 0
-Maximum Frame Size : 1500

```

Extended 802.1 TLV Info

```
-Port VLAN Id : 1
```

**Port & Protocol VLAN Id**

Protocol VLAN Id	Support	Protocol VLAN Status	TxStatus
-----	-----	-----	-----
<b>0 Supported</b>	<b>Enabled</b>	<b>Enabled</b>	
-Vlan Name			
Vlan Id	Vlan Name		TxStatus
-----	-----		-----
1	vlan1		Enabled
2	vlan2		Disabled

**NOTE:** No entry (i.e. Protocol VLAN ID of 0) is displayed for Port & Protocol VLAN ID (PPVID).

- At Switch B, verify the neighbor information learnt on interface gigabitethernet 0/1 by executing the following command.

```
iS5comm# show lldp neighbors gigabitethernet 0/1 detail
```

Capability Codes:

(R) Router, (B) Bridge, (T) Telephone, (C) DOCSIS Cable Device,  
(W) WLAN Access Point, (P) Repeater, (S) Station, (O) Other

Chassis Id SubType: Mac Address

Chassis Id: E8:E8:75:90:5F:81

Port Id SubType: Interface Alias

Port Id: Gi0/1

Port Description: Ethernet Interface

```

System Name                : iS5com
System Description         : RAPTOR iMX 950, iBiome :1.5.03
Local Intf: Gi0/1
Time Remaining: 116 Seconds
System Capabilities Supported: B,R
System Capabilities Enabled: B,R

```

```

Extended 802.3 TLV Info
-MAC PHY Configuration & Status
Auto Negotiation Tlv: Not Advertised
-Link Aggregation
Link Aggregation Tlv: Not Advertised
-Maximum Frame Size Tlv: Not Advertised

```

```

Extended 802.1 TLV Info
-Port VLAN Id: 1
-Port & Protocol VLAN Id
Protocol Vlan Tlv: Not Advertised
-Vlan Name
Vlan Id Vlan Name
-----
1 vlan1
-----
Total Entries Displayed: 1

```

**NOTE:** No entry is displayed for Port & Protocol VLAN ID (*PPVID*)

5. Recreate the *PPVID*, i.e. create and map protocol group 10 to *VLAN 2*.

At Switch A:

```

- Enter the Global Configuration Mode.
iS5comm# configure terminal
- Create a protocol group 10.
iS5comm(config)# map protocol ip enet-v2 protocols-group 10
- Enter Interface Configuration Mode.
iS5comm(config)# interface gigabitethernet 0/1
- For the specified interface, map the protocol group 10 to a VLAN ID 2.
iS5comm(config-if)# switchport map protocols-group 10 vlan 2
iS5comm(config)# end
- View the configuration.
iS5comm# show lldp local gigabitethernet 0/1
Port Id SubType                : Interface Alias

```

```

Port Id : Gi0/1
Port Description : Ethernet Interface Port 01
Enabled Tx Tlvs : Port Description, System Name,
System Description, System Capability,
Management Address

Extended 802.3 TLV Info
-MAC PHY Configuration & Status
Auto-Neg Support & Status : Not Supported, Enabled
Advertised Capability Bits : 0000
Operational MAU Type : 0
-Link Aggregation
Capability & Status : Not Capable, Not In Aggregation
Aggregated Port Id : 0
-Maximum Frame Size : 1500

```

Extended 802.1 TLV Info

```
-Port VLAN Id : 1
```

**Port & Protocol VLAN Id**

Protocol VLAN Id	Support	Protocol VLAN Status	TxStatus
-----	-----	-----	-----
<b>2</b>	<b>Supported</b>	<b>Enabled</b>	<b>Disabled</b>
-Vlan Name			
Vlan Id	Vlan Name	TxStatus	
-----	-----	-----	
1	vlan1	Enabled	
2	vlan2	Disabled	

**NOTE:** Protocol VLAN ID of 2 is displayed as supported, enabled and not transmitting (*PPVID*).

- At Switch B, verify the neighbor information learnt on interface gigabitethernet 0/1, by executing the following command

```
iS5comm# show lldp neighbors gigabitethernet 0/1 detail
```

Capability Codes:

(R) Router, (B) Bridge, (T) Telephone, (C) DOCSIS Cable Device,  
(W) WLAN Access Point, (P) Repeater, (S) Station, (O) Other

Chassis Id SubType: Mac Address

Chassis Id: E8:E8:75:90:5F:81

Port Id SubType: Interface Alias

Port Id: Gi0/1

Port Description: Ethernet Interface

```

System Name                : iS5com
System Description         : RAPTOR iMX 950, iBiome :1.5.03
Local Intf: Gi0/1
Time Remaining: 116 Seconds
System Capabilities Supported: B,R
System Capabilities Enabled: B,R

```

```

Extended 802.3 TLV Info
-MAC PHY Configuration & Status
Auto Negotiation Tlv: Not Advertised
-Link Aggregation
Link Aggregation Tlv: Not Advertised
-Maximum Frame Size Tlv: Not Advertised

```

```

Extended 802.1 TLV Info
-Port VLAN Id: 1
-Port & Protocol VLAN Id
Protocol Vlan Tlv: Not Advertised
-Vlan Name
Vlan Id      Vlan Name
-----
1            vlan1
-----
Total Entries Displayed: 1
NOTE: No entry is displayed for Port & Protocol VLAN ID (PPVID).

```

## 3.10. Enabling IEEE 802.3 Organizationally Specific TLVs

### CONTEXT:

This section describes how to enable IEEE 802.3 organizationally-specific *TLVs*, whose transmission status is set to Disabled by default. They are as follows:

- *MAC-PHY* Configuration/Status
- Link Aggregation
- Max Frame Size

### At Switch A and Switch B:

**NOTE:** Configure the *LLDP* module status as enabled. Refer to section “Enabling LLDP” for details.

1. Enable IEEE 802.3 Organizationally-specific *TLVs* by executing the following commands.

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

– Enable IEEE 802.3 organizationally-specific TLVs on port P1.

```
iS5comm(config)# interface gigabitethernet 0/1
iS5comm(config-if)# lldp tlv-select dot3tlv link-aggregation
iS5comm(config-if)# lldp tlv-select dot3tlv macphy-config
iS5comm(config-if)# lldp tlv-select dot3tlv max-framesize
iS5comm(config-vlan)# end
```

2. At Switch A: view the local system information by executing the following command.

FOR EXAMPLE: Perform the following:

```
iS5comm# show lldp local gigabitethernet 0/1
```

```
Port Id SubType           : Interface Alias
Port Id                   : Gi0/1
Port Description          : Ethernet Interface Port 01
Enabled Tx Tlvs           : Port Description, System Name,
System Description, System Capability,
Management Address, Mac Phy, Link Aggregation,Max Frame Size
```

```
Extended 802.3 TLV Info
-MAC PHY Configuration & Status
Auto-Neg Support & Status : Not Supported, Enabled
Advertised Capability Bits : 0000
Operational MAU Type      : 0
```

```
-Link Aggregation
Capability & Status       : Not Capable, Not In Aggregation
Aggregated Port Id       : 0
-Maximum Frame Size      : 1500
```

```
Extended 802.1 TLV Info
Port VLAN Id             : 1
-Port & Protocol VLAN Id
```

Protocol VLAN Id	Support	Protocol VLAN Status	TxStatus
0	Supported	Enabled	Disabled

```
-Vlan Name
```

Vlan Id	Vlan Name	TxStatus
1	vlan1	Enabled

3. At Switch B, verify the neighbor information learnt on interface gigabitethernet 0/1, by executing the following command.

FOR EXAMPLE: Perform the following.

```
iS5comm# show lldp neighbors gigabitethernet 0/1 detail
```

Capability Codes:

(R) Router, (B) Bridge, (T) Telephone, (C) DOCSIS Cable Device,  
(W) WLAN Access Point, (P) Repeater, (S) Station, (O) Other

Chassis Id SubType: Mac Address

Chassis Id: E8:E8:75:90:5F:81

Port Id SubType: Interface Alias

Port Id: Gi0/1

Port Description: Ethernet Interface

System Name : iS5com

System Description : RAPTOR iMX 950, iBiome :1.5.03

Local Intf: Gi0/1

Time Remaining: 116 Seconds

System Capabilities Supported: B,R

System Capabilities Enabled: B,R

Extended 802.3 TLV Info

-MAC PHY Configuration & Status

Auto Negotiation Tlv: Supported, Disabled

Advertised Capability Bits: 6c11

10base-T(HD)

10base-T(FD)

100base-TX(HD)

100base-TX(FD)

Asym and Symm PAUSE(FD)

1000base-T(FD)

-Link Aggregation

Capability & Status: Not Capable, Not In AggregationAggregated Port Id:

1-Maximum Frame Size: 1500

Extended 802.1 TLV Info

-Port VLAN Id: 1

-Port & Protocol VLAN Id

**Protocol Vlan Tlv: Not Advertised**

-Vlan Name

```

Vlan Id      Vlan Name
-----
1            vlan1
-----

```

Total Entries Displayed: 1

**NOTE:** see the new entries for Auto Negotiation *TLV*, Link Aggregation, and Maximum Frame Size.

## 3.11. Disabling LLDP Basic Optional TLVs

CONTEXT:

At Switch A:

This section describes how to disable the basic optional *TLVs*.

**At Switch A and Switch B:**

**NOTE:** Configure the *LLDP* module status as enabled. Refer to section “Enabling LLDP” for configuring *LLDP* module status.

1. Disable basic optional *TLVs* by executing the following commands.

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Configure the basic optional *TLVs*, where “basic-tlv” stands for selecting configuring the basic optional *TLVs*.

```
iS5comm(config)# interface gigabitethernet 0/1
```

```
iS5comm(config-if)# no lldp tlv-select basic-tlv port-descr
```

```
iS5comm(config-if)# no lldp tlv-select basic-tlv sys-name
```

```
iS5comm(config-if)# no lldp tlv-select basic-tlv sys-descr
```

```
iS5comm(config-if)# no lldp tlv-select basic-tlv sys-capab
```

```
iS5comm(config-if)# no lldp tlv-select basic-tlv mgmt-addr all
```

- Exit the Global Configuration Mode

```
iS5comm(config)# exit
```

2. **At Switch A**, view the *LLDP* local system information by executing the following command.

FOR EXAMPLE: `iS5comm# show lldp local gigabitethernet 0/1`

```
Port Id SubType           : Interface Alias
```

```
Port Id                   : Gi0/1
```

```
Port Description          : Ethernet Interface Port 01
```

```
Enabled Tx Tlvs          : Mac Phy, Link Aggregation, Max Frame  
Size
```

```
Extended 802.3 TLV Info
```

```

-MAC PHY Configuration & Status
Auto-Neg Support & Status      : Not Supported, Enabled
Advertised Capability Bits     : 0000
Operational MAU Type          : 0
-Link Aggregation
Capability & Status            : Not Capable, Not In Aggregation
Aggregated Port Id             : 0
-Maximum Frame Size           : 1500

Extended 802.1 TLV Info
-Port VLAN Id                  : 1
-Port & Protocol VLAN Id
Protocol VLAN Id      Support      Protocol VLAN Status      TxStatus
-----
0                     Supported    Enabled                  Disabled
-Vlan Name
Vlan Id              Vlan Name              TxStatus
-----
1                     Disabled

```

3. At Switch B, view the information about neighbors learnt by executing the following command.

FOR EXAMPLE: Perform the following:

```
is5comm# show lldp neighbors gigabitethernet 0/1 detail
```

Capability Codes:

(R) Router, (B) Bridge, (T) Telephone, (C) DOCSIS Cable Device,  
(W) WLAN Access Point, (P) Repeater, (S) Station, (O) Other

```

Chassis Id SubType: Mac Address
Chassis Id: E8:E8:75:90:5F:81
Port Id SubType: Interface Alias
Port Id: Gi0/1
Port Description: Not Advertised
System Name      : Not Advertised
System Description : Not Advertised
Local Intf: Gi0/1
Time Remaining: 116 Seconds
System Capabilities Supported: B,R
System Capabilities Enabled: B,R
Management Addresses:
IfId SubType Address OID

```



```

-----
1009 IPv4 12.0.0.11 3 6 1 2 1 2 2 1 1

Extended 802.3 TLV Info
-MAC PHY Configuration & Status
Auto Negotiation Tlv: Not Advertise
-Link Aggregation
Link Aggregation Tlv: Not Advertised
-Maximum Frame Size Tlv: Not Advertised

Extended 802.1 TLV Info
-Port VLAN Tlv: Not Advertised
-Port & Protocol VLAN Id
Protocol Vlan Tlv: Not Advertised
-Vlan Name
Vlan Name Tlv: Not Advertised
-----
Total Entries Displayed : 1

```

## 3.12. Disabling IEEE 802.1 Organizationally Specific TLVs

### CONTEXT:

This section describes how to disable IEEE 802.1 organizationally-specific *TLVs*.

#### At Switch A and Switch B:

**NOTE:** Configure the *LLDP* module status as enabled. Refer to section “Enabling LLDP” for details.

1. Configure *VLAN* name as *vlan1* by executing the following commands.  
FOR EXAMPLE: Type the following:
  - Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

  - Configure *VLAN* name as *vlan1*.

```
iS5comm(config)# vlan 1
iS5comm(config-vlan)# ports gigabitethernet 0/1
iS5comm(config-vlan)# name vlan1
iS5comm(config-vlan)# end
```
2. Enable the IEEE 802.1 Organizationally Specific *TLVs* by executing the following commands.  
FOR EXAMPLE: Perform the following.  
Type the following:
  - Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

– **Enable IEEE 802.1 Organizationally Specific TLVs.**

```
iS5comm(config)# interface gigabitethernet 0/1
iS5comm(config-if)# lldp tlv-select dot1tlv protocol-vlan-id all
iS5comm(config-if)# lldp tlv-select dot1tlv vlan-name all
iS5comm(config-if)# lldp tlv-select dot1tlv port-vlan-id
iS5comm(config-if)# end
```

3. **Disable the IEEE 802.1 Organizationally Specific TLVs by executing the following commands.**

FOR EXAMPLE: Perform the following.

– **Enter the Global Configuration Mode.**

```
iS5comm# configure terminal
```

– **Enable IEEE 802.1 Organizationally Specific TLVs.**

```
iS5comm(config)# interface gigabitethernet 0/1
iS5comm(config-if)# no lldp tlv-select dot1tlv port-vlan-id
iS5comm(config-if)# no lldp tlv-select dot1tlv protocol-vlan-id all
iS5comm(config-if)# no lldp tlv-select dot1tlv vlan-name all
iS5comm(config-if)# end
```

4. **At Switch A, verify the local system information by executing the following command.**

FOR EXAMPLE: Perform the following:

```
iS5comm# show lldp local gigabitethernet 0/1
Port Id SubType           : Interface Alias
Port Id                   : Gi0/1
Port Description          : Ethernet Interface Port 01
Enabled Tx Tlvs           : Port Description, System Name,
System Description, System Capability, Management Address, Mac Phy, Link
Aggregation, Max Frame Size
```

```
Extended 802.3 TLV Info
```

```
-MAC PHY Configuration & Status
```

```
Auto-Neg Support & Status : Not Supported, Enabled
Advertised Capability Bits : 0000
Operational MAU Type      : 0
```

```
-Link Aggregation
```

```
Capability & Status       : Not Capable, Not In Aggregation
Aggregated Port Id       : 0
-Maximum Frame Size      : 1500
```

```
Extended 802.1 TLV Info
```

```
Port VLAN Id             : 1
```

```
-Port & Protocol VLAN Id
Protocol VLAN Id      Support      Protocol VLAN Status      TxStatus
-----
0                      Supported   Enabled                     Disabled
```

```
-Vlan Name
Vlan Id      Vlan Name      TxStatus
-----
1            vlan1          Enabled
```

**NOTE:** Enabled Tx Tlvs do not display any IEEE 802.1 Organizationally Specific TLVs, and Port & Protocol VLAN ID, VLAN name TLVs are disabled since IEEE 802.1 Organizationally Specific TLVs are disabled.

5. At Switch B, verify the neighbor information learnt on interface gigabitethernet 0/1, by executing the following command.

FOR EXAMPLE: Perform the following:

```
iS5comm# show lldp neighbors gigabitethernet 0/1 detail
```

Capability Codes:

(R) Router, (B) Bridge, (T) Telephone, (C) DOCSIS Cable Device,  
(W) WLAN Access Point, (P) Repeater, (S) Station, (O) Other

```
Chassis Id SubType: Mac Address
Chassis Id: E8:E8:75:90:5F:81
Port Id SubType: Interface Alias
Port Id: Gi0/1
Port Description: Ethernet Interface
System Name : iS5com
System Description : RAPTOR iMX 950, iBiome :1.5.03
Local Intf: Gi0/1
Time Remaining: 116 Seconds
System Capabilities Supported: B,R
System Capabilities Enabled: B,R
```

```
Extended 802.3 TLV Info
-MAC PHY Configuration & Status
Auto Negotiation Tlv: Not Advertised
-Link Aggregation
Link Aggregation Tlv: Not Advertised
-Maximum Frame Size Tlv: Not Advertised
```

```
Extended 802.1 TLV Info
-Port VLAN Tlv : Not Advertised
```

```

-Port VLAN Id: 1
-Port & Protocol VLAN Id
Protocol Vlan Tlv: Not Advertised
-Vlan Name
Vlan Name Tlv: Not Advertised
-----
Total Entries Displayed: 1

```

### 3.13. Disabling IEEE 802.3 Organizationally Specific TLVs

#### CONTEXT:

This section describes how to disable IEEE 802.3 Organizationally Specific *TLVs*.

#### At Switch A and Switch B:

**NOTE:** Configure the *LLDP* module status as enabled. Refer to section “Enabling LLDP” for details.

1. Disable IEEE 802.3 Organizationally-specific *TLVs* by executing the following commands.

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Enable IEEE 802.3 organizationally-specific *TLVs* on port P1.

```

iS5comm(config)# interface gigabitethernet 0/1
iS5comm(config-if)# no lldp tlv-select dot3tlv link-aggregation
iS5comm(config-if)# no lldp tlv-select dot3tlv macphy-config
iS5comm(config-if)# no lldp tlv-select dot3tlv max-framesize
iS5comm(config-vlan)# end

```

2. At Switch A: verify the configuration about neighbors learnt on a particular interface.

FOR EXAMPLE: Perform the following:

```

iS5comm# show lldp local gigabitethernet 0/1
Port Id SubType           : Interface Alias
Port Id                   : Gi0/1
Port Description          : Ethernet Interface Port 01
Enabled Tx Tlvs           :

```

Extended 802.3 TLV Info

-MAC PHY Configuration & Status

```

Auto-Neg Support & Status : Not Supported, Enabled
Advertised Capability Bits : 0000
Operational MAU Type      : 0

```

```
-Link Aggregation
Capability & Status          : Not Capable, Not In Aggregation
Aggregated Port Id          : 0
-Maximum Frame Size         : 1500
```

#### Extended 802.1 TLV Info

```
Port VLAN Id                : 1
```

#### -Port & Protocol VLAN Id

Protocol VLAN Id	Support	Protocol VLAN Status	TxStatus
-----	-----	-----	-----
0	Supported	Enabled	Disabled

#### -Vlan Name

Vlan Id	Vlan Name	TxStatus
-----	-----	-----
1	vlan1	Enabled

**NOTE:** Enabled Tx Tlvs do not display any IEEE 802.3 Organizationally Specific *TLVs* since IEEE 802.3 Organizationally Specific *TLVs* are disabled.

3. At Switch B, verify the neighbor information learnt on interface gigabitethernet 0/1, by executing the following command.

FOR EXAMPLE: Perform the following.

```
iS5comm# show lldp neighbors gigabitethernet 0/1 detail
```

#### Capability Codes:

(R) Router, (B) Bridge, (T) Telephone, (C) DOCSIS Cable Device,  
(W) WLAN Access Point, (P) Repeater, (S) Station, (O) Other

```
Chassis Id SubType: Mac Address
```

```
Chassis Id: E8:E8:75:90:5F:81
```

```
Port Id SubType: Interface Alias
```

```
Port Id: Gi0/1
```

```
Port Description: Ethernet Interface
```

```
System Name : iS5com
```

```
System Description : RAPTOR iMX 950, iBiome :1.5.03
```

```
Local Intf: Gi0/1
```

```
Time Remaining: 116 Seconds
```

```
System Capabilities Supported: B,R
```

```
System Capabilities Enabled: B,R
```

#### Extended 802.3 TLV Info

```
-MAC PHY Configuration & Status
```

```
Auto Negotiation Tlv: Not Advertised
-Link Aggregation
Link Aggregation Tlv: Not Advertised
-Maximum Frame Size Tlv: Not Advertised

Extended 802.1 TLV Info
-Port VLAN Tlv: Not Advertised
-Port VLAN Id: 1
-Port & Protocol VLAN Id
Protocol Vlan Tlv: Not Advertised
-Vlan Name
Vlan Name Tlv: Not Advertised
-----
Total Entries Displayed: 1
```

## 3.14. Configuring the LLDP chassis-ID-subtype

### CONTEXT:

This section describes the configuration of chassis ID subtype. Chassis ID subtype can be configured as any of the following values:

- Chassis component
- Interface alias
- Port component
- MAC address
- Network address
- Interface name
- Local

**NOTE:** While configuring Chassis ID subtype as Chassis component / Port component/ Local, an input string must be given in the command for setting Chassis ID.

### At Switch A and Switch B:

1. Configure *LLDP* chassis ID subtype by executing the following commands:.

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Configure chassis-ID subtype and enable *LLDP*.

```
i5comm(config)# lldp chassis-id-subtype chassis-comp "chassis"
```

```
iS5comm(config)# set lldp enable
```

```
iS5comm(config)# exit
```

2. At Switch A: verify the configuration about neighbors learnt on a particular interface.

FOR EXAMPLE: Perform the following:

```
iS5comm# show lldp local gigabitethernet 0/1
```

```
Port Id SubType           : Mac Address
Port Id                   : e8:e8:75:90:5f:82
Port Description          : Ethernet Interface Port 01
Enabled Tx Tlvs           :
```

```
Extended 802.3 TLV Info
```

```
-MAC PHY Configuration & Status
```

```
Auto-Neg Support & Status : Not Supported, Enabled
Advertised Capability Bits : 0000
Operational MAU Type      : 0
```

```
-Link Aggregation
```

```
Capability & Status       : Not Capable, Not In Aggregation
Aggregated Port Id        : 0
-Maximum Frame Size       : 1500
```

```
Extended 802.1 TLV Info
```

```
Port VLAN Id              : 1
```

```
-Port & Protocol VLAN Id
```

Protocol VLAN Id	Support	Protocol VLAN Status	TxStatus
0	Supported	Enabled	Disabled

```
-Vlan Name
```

Vlan Id	Vlan Name	TxStatus
1	vlan1	Enabled

3. At Switch B, verify the neighbor information learnt on interface gigabitethernet 0/1, by executing the following command.

FOR EXAMPLE: Perform the following.

```
iS5comm# show lldp neighbors gigabitethernet 0/1 detail
```

```
Capability Codes:
```

```
(R) Router, (B) Bridge, (T) Telephone, (C) DOCSIS Cable Device,
(W) WLAN Access Point, (P) Repeater, (S) Station, (O) Other
```

```
Chassis Id SubType: Chassis Component
```

```
Chassis Id: chassis
```

```
Port Id SubType: Interface Alias
Port Id: Gi0/1
Port Description: Ethernet Interface
System Name : iS5com
System Description : RAPTOR iMX 950, iBiome :1.5.03
Local Intf: Gi0/1
Time Remaining: 116 Seconds
System Capabilities Supported: B,R
System Capabilities Enabled: B,R
```

```
Extended 802.3 TLV Info
-MAC PHY Configuration & Status
Auto Negotiation Tlv: Not Advertised
-Link Aggregation
Link Aggregation Tlv: Not Advertised
-Maximum Frame Size Tlv: Not Advertised
```

```
Extended 802.1 TLV Info
-Port VLAN Tlv: Not Advertised
-Port VLAN Id: 1
-Port & Protocol VLAN Id
Protocol Vlan Tlv: Not Advertised
-Vlan Name
Vlan Name Tlv: Not Advertised
```

```
-----
Total Entries Displayed: 1
```

## 3.15. Configuring the LLDP port-ID-subtype

### CONTEXT:

This section describes the configuration of port ID subtype. Port ID subtype can be configured to any of the following values:

- Interface alias
- Port component
- MAC address
- Network address
- Interface name
- Agent Circuit Id
- Local



**NOTE:** While configuring Port ID subtype as Port component / local, an input string must be given in the command for setting Port ID.

**At Switch A and Switch B:**

1. Configure *LLDP* port ID subtype by executing the following commands.

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Configure *LLDP* port-ID subtype and enable *LLDP*.

```
iS5comm(config)# interface gigabitethernet 0/1
```

```
i5comm(config)# lldp port-id-subtype mac-addr
```

```
iS5comm(config)# set lldp enable
```

```
iS5comm(config)# exit
```

2. At Switch A: verify the configuration of neighbors learnt on a particular interface.

FOR EXAMPLE: Perform the following:

```
iS5comm# show lldp
```

```
LLDP is enabled
```

```
LLDP Version : v1
```

```
Transmit Interval : 30
```

```
Holdtime Multiplier : 4
```

```
Reinitialization Delay : 2
```

```
Tx Delay : 2
```

```
Notification Interval : 5
```

```
Chassis Id SubType : Chassis Component
```

```
Chassis Id : chassis
```

```
LLDP Tag Status : disabled
```

```
Configured Management Ipv4 Address : 0.0.0.0
```

```
Configured Management Ipv6 Address : ::
```

3. At Switch B, verify the neighbor information learnt on interface *gigabitethernet 0/1*, by executing the following command.

FOR EXAMPLE: Perform the following.

```
iS5comm# show lldp neighbors gigabitethernet 0/1 detail
```

```
Capability Codes:
```

```
(R) Router, (B) Bridge, (T) Telephone, (C) DOCSIS Cable Device,  
(W) WLAN Access Point, (P) Repeater, (S) Station, (O) Other
```

```
Chassis Id SubType: Chassis Component
```

```
Chassis Id: chassis
```

```
Port Id SubType: Mac Address
```

```
Port Id: 00:01:02:03:04:01
```

```
Port Description: Ethernet Interface
System Name : iS5com
System Description : RAPTOR iMX 950, iBiome :1.5.03
Local Intf: Gi0/1
Time Remaining: 116 Seconds
System Capabilities Supported: B,R
System Capabilities Enabled: B,R
```

```
Extended 802.3 TLV Info
-MAC PHY Configuration & Status
Auto Negotiation Tlv: Not Advertised
-Link Aggregation
Link Aggregation Tlv: Not Advertised
-Maximum Frame Size Tlv: Not Advertised
```

```
Extended 802.1 TLV Info
-Port VLAN Tlv: Not Advertised
-Port VLAN Id: 1
-Port & Protocol VLAN Id
Protocol Vlan Tlv: Not Advertised
-Vlan Name
Vlan Name Tlv: Not Advertised
```

```
-----
Total Entries Displayed: 1
```

## 3.16. Enable/Configure LLDP Notification Status/Type

### CONTEXT:

By default, notification status is Disabled, and notification type is Mis-configuration. Notification type can be set to any of the following values:

- Mis-configuration
- Remote table change

Setting notification type to Mis-configuration enables *LLDP* to send notification to *SNMP* manager when mis-configuration is observed in the system. Setting notification type to remote table change enables *LLDP* to send notification to *SNMP* manager whenever remote table change occurs with the configured notification interval between successive notifications.

### At Switch A:

1. View the default notification status and type by executing the following command.

FOR EXAMPLE: Perform the following:

```
iS5comm# show lldp interface gigabitethernet 0/1
Gi0/1:
Tx State           : Enabled
Rx State           : Enabled
Tx SEM State       : INITIALIZE
Rx SEM State       : WAIT PORT OPERATIONAL
Notification Status : Disabled
Notification Type   : Mis-configuration
DestinationMacAddr  : 01:80:c2:00:00:0e
```

2. Configure *LLDP* notification status by executing the following command.

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Configure the *LLDP* notification type.

```
iS5comm(config)# interface gigabitethernet 0/1
iS5comm(config-if)# lldp notification mis-configuration
iS5comm(config-if)# end
```

3. View the notification status by executing the following command.

FOR EXAMPLE: Perform the following:

```
iS5comm# show lldp interface gigabitethernet 0/1
Gi0/1:
Tx State           : Enabled
Rx State           : Enabled
Tx SEM State       : INITIALIZE
Rx SEM State       : WAIT PORT OPERATIONAL
```

**Notification Status : Enabled**

```
Notification Type   : Mis-configuration
DestinationMacAddr  : 01:80:c2:00:00:0e
```

4. Configure *LLDP* notification type by executing the following command.

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Configure the *LLDP* notification type, where “remote-table-chg” stands for trap notification for a change in a neighbor’s table.

```
iS5comm(config)# interface gigabitethernet 0/1
iS5comm(config-if)# lldp notification remote-table-chg mis-configuration
iS5comm(config-if)# end
```

5. View the notification type executing the following command.

FOR EXAMPLE: Perform the following:

```
iS5comm# show lldp interface gigabitethernet 0/1
Gi0/1:
Tx State           : Enabled
Rx State           : Enabled
Tx SEM State       : INITIALIZE
Rx SEM State       : WAIT PORT OPERATIONAL
```

**Notification Status : Enabled**

```
Notification Type   : RemoteTableChg and MisConfiguration
DestinationMacAddr  : 01:80:c2:00:00:0e
```

6. Reset notification status and type to default value by executing the following commands.

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Reset LLDP notification type and status to default value.

```
iS5comm(config)# interface gigabitethernet 0/1
iS5comm(config-if)# no lldp notification
iS5comm(config-if)# end
```

7. View the notification type executing the following command.

FOR EXAMPLE: Perform the following:

```
iS5comm# show lldp interface gigabitethernet 0/1
Gi0/1:
Tx State           : Enabled
Rx State           : Enabled
Tx SEM State       : INITIALIZE
Rx SEM State       : WAIT PORT OPERATIONAL
```

**Notification Status : Disabled**

```
Notification Type   : MisConfiguration
DestinationMacAddr  : 01:80:c2:00:00:0e
```

## 3.17. Clearing LLDP Traffic Counters

**CONTEXT:** This section describes how to clear the *LLDP* traffic counters. *LLDP* traffic counters are updated whenever *LLDP* operates in Transmit and Receive/Transmit Only modes.

### At Switch A and Switch B:

**NOTE:** Configure the LLDP module status as enabled. Refer to section “Enabling LLDP” for details.

1. Clear *LLDP* traffic counters by executing the following commands.

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Allow the switches (Switch A and Switch B) to transmit *LLDP*DUs, after that clear *LLDP* traffic counters.

```
iS5comm(config)# clear lldp counters
```

```
iS5comm(config)# exit
```

2. At Switch A: verify the configuration of neighbors learnt on a particular interface.

FOR EXAMPLE: Perform the following:

```
iS5comm# show lldp traffic
```

```
Total Tagged Frames Out           : 0
Total Entries Aged                 : 0
Total Frames In                   : 0
Total Frames Received In Error     : 0
Total Frames Discarded             : 0
Total TLVS Unrecognized            : 0
Total TLVS Discarded               : 0
Total PDU length error Drops       : 0
Total LLDP-MED Frames Out          : 0
Total LLDP-MED Frames In           : 0
Total LLDP-MED Frames Discarded    : 0
Total LLDP-MED TLVs Discarded      : 0
Total Media Capability TLVs Discarded : 0
Total Network Policy TLVs Discarded : 0
Total Inventory TLVs Discarded     : 0
Total Location TLVs Discarded      : 0
Total Ex-PowerViaMDI TLVs Discarded : 0
Med-Capability TLV Discard Reason  : Not Applicable
Nw-Policy TLV Discard Reason       : Not Applicable
Inventory TLV Discard Reason       : Not Applicable
Location-ID TLV Discard Reason     : Not Applicable
Ex-PowerViaMDI TLV Discard Reason  : Not Applicable
```

## 3.18. Clearing LLDP Remote Table

**CONTEXT:** This section describes how to clear the *LLDP* remote table. *LLDP* remote table is updated when *LLDP* operates in Transmit and Receive/Receive Only modes.

**At Switch A and Switch B:**

**NOTE:** Configure the *LLDP* module status as enabled. Refer to section “Enabling LLDP” for details.

1. Clear *LLDP* remote table by executing the following commands.

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Allow the switches (Switch A and Switch B) to learn neighbors, after that clear *LLDP* remote table.

```
iS5comm(config)# clear lldp table
```

```
iS5comm(config)# exit
```

2. At Switch A: verify the configuration of neighbors learnt on a particular interface.

FOR EXAMPLE: Perform the following:

```
iS5comm# show lldp neighbors
```

```
Capability Codes      :
```

```
(R) Router, (B) Bridge, (T) Telephone, (C) DOCSIS Cable Device,  
(W) WLAN Access Point, (P) Repeater, (S) Station, (O) Other
```

Chassis ID	Local Intf	Hold-time	Capability	Port Id
-----	-----	-----	-----	-----

```
Total Entries Displayed : 0
```

## 3.19. Show LLDP Errors

**CONTEXT:**

This command displays the information about the count number of memory allocation failures, queue and table overflows in *LLDP*:

- Memory allocation failures—count number of times memory allocation failed in *LLDP*
- Queue overflows—count number of times the input queue overflow occurred in *LLDP*
- Table overflows—count number of times the remote table overflows occurred in *LLDP* (i.e. number of times remote table has dropped the newly learnt neighbor entry because of insufficient space in the remote system table)

**At Switch A and Switch B:**

**NOTE:** Configure the *LLDP* module status as enabled. Refer to section “Enabling LLDP” for details.

1. View the *LLDP* errors by executing the following command.

FOR EXAMPLE: Perform the following:

```
iS5comm# show lldp errors
Total Memory Allocation Failures : 0
Total Input Queue Overflows      : 0
Total Table Overflows            : 0
```

## 3.20. Configuring LLDP Trace Options

1. Enable all trace options by executing the following command.

FOR EXAMPLE: Perform the following:

```
iS5comm# debug lldp all
```

- View the trace option by executing the following command.

```
iS5comm# debug lldp
[LLDP] : MAIN: Recvd Tmr Exp Event
[LLDP] : LldpTimerExpHandler: Timer expiry to be handled
[LLDP] : Timer to be processed 43c272b8
[LLDP] : TimerId: 3      Offset: 184
[LLDP] : LLDP MsgInterval timer expired
[LLDP] : TX-Timer-SEM[9], STATE: LLDP_TX_TMR_IDLE, EVENT:
LLDP_TX_TMR_EV_MSG_INTVAL
[LLDP] : TXTMR-SEM[9]: Event Timer Expiry.
[LLDP] : TXTMR-SEM[9]: Event Signal Tx .
[LLDP] : TX-SEM[9], STATE: LLDP_TX_IDLE, EVENT: LLDP_TX_EV_TX_NOW
[LLDP] : TX-SEM[9]: State = LLDP_TX_INFO_FRAME
[LLDP] : LldpPortHandleOutgoingPkt: LLDP Frame is successfully
transmitted on Port: 9.
[LLDP] : Dumping Transmitted LLDP FRAME :
01 80 c2 00 00 0e e8 e8 75 90 5f 8a 88 cc 02 08
01 63 68 61 73 73 69 73 04 06 01 47 69 30 2f 39
06 02 00 78 08 1a 45 74 68 65 72 6e 65 74 20 49
6e 74 65 72 66 61 63 65 20 50 6f 72 74 20 30 39
0a 06 69 53 35 63 6f 6d 0c 1c 52 41 50 54 4f 52
20 69 4d 58 39 35 30 2c 20 69 42 69 6f 6d 65 20
```

- To interrupt the operation of the debug lldp command, type the following.

```
iS5comm# no debug lldp all
```

Enable Packet Dump TLV traces by executing the following command.

```
iS5comm# debug lldp pkt-dump
```

```
iS5comm# [LLDP] : Dumping Transmitted LLDP FRAME :
01 80 c2 00 00 0e e8 e8 75 90 5f 8a 88 cc 02 08
01 63 68 61 73 73 69 73 04 06 01 47 69 30 2f 39
06 02 00 78 08 1a 45 74 68 65 72 6e 65 74 20 49
6e 74 65 72 66 61 63 65 20 50 6f 72 74 20 30 39
0a 06 69 53 35 63 6f 6d 0c 1c 52 41 50 54 4f 52
20 69 4d 58 39 35 30 2c 20 69 42 69 6f 6d 65 20
31 2e 35 2e 30 33 0e 04 00 14 00 14 00 00
[LLDP] : Dumping Transmitted LLDP FRAME :
01 80 c2 00 00 0e e8 e8 75 90 5f 8a 88 cc 02 08
01 63 68 61 73 73 69 73 04 06 01 47 69 30 2f 39
06 02 00 78 08 1a 45 74 68 65 72 6e 65 74 20 49
6e 74 65 72 66 61 63 65 20 50 6f 72 74 20 30 39
0a 06 69 53 35 63 6f 6d 0c 1c 52 41 50 54 4f 52
20 69 4d 58 39 35 30 2c 20 69 42 69 6f 6d 65 20
31 2e 35 2e 30 33 0e 04 00 14 00 14 00 00
iS5comm# no debug lldp pkt-dump
```

## 3.21. Configuration of LLDP Neighbor MAC Address for LLDP Session

CONTEXT:

### At Switch A and Switch B:

1. Enable the *LLDP* module in both switches.

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
iS5comm(config)# set lldp enable
iS5comm(config)# set lldp version v2
```

### At Switch A:

- Configure the destination MAC address.

```
iS5comm(config)# interface gigabitethernet 0/1
iS5comm(config-if)# lldp dest-mac 00:02:02:03:04:01
iS5comm(config)# exit
```

### At Switch B:

- Configure the destination MAC address.

```
iS5comm(config)# interface gigabitethernet 0/1
iS5comm(config-if)# lldp dest-mac 00:01:02:03:04:01
iS5comm(config)# exit
```



2. At Switch A: verify the destination *MAC* address using the following command.

FOR EXAMPLE: Perform the following:

```
is5comm# show lldp interface gigabitethernet 0/1
Gi0/1:
Tx State           : Enabled
Rx State           : Enabled
Tx SEM State       : INITIALIZE
Rx SEM State       : WAIT PORT OPERATIONAL
Notification Status : Disabled
Notification Type   : Mis-configuration
DestinationMacAddr  : 01:80:c2:00:00:0e
Gi0/1:
Tx State           : Enabled
Rx State           : Enabled
Tx SEM State       : INITIALIZE
Rx SEM State       : WAIT PORT OPERATIONAL
Notification Status : Disabled
Notification Type   : Mis-configuration
DestinationMacAddr  : 00:02:02:03:04:01
```

3. At Switch B: verify the destination *MAC* address using the following command.

FOR EXAMPLE: Perform the following:

```
is5comm# show lldp interface gigabitethernet 0/1
Gi0/1:
Tx State           : Enabled
Rx State           : Enabled
Tx SEM State       : INITIALIZE
Rx SEM State       : WAIT PORT OPERATIONAL
Notification Status : Disabled
Notification Type   : Mis-configuration
DestinationMacAddr  : 01:80:c2:00:00:0e
Gi0/1:
Tx State           : Enabled
Rx State           : Enabled
Tx SEM State       : INITIALIZE
Rx SEM State       : WAIT PORT OPERATIONAL
Notification Status : Disabled
Notification Type   : Mis-configuration
DestinationMacAddr  : 00:01:02:03:04:01
```

4. Unmap the *MAC* address in both switches.

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

**At Switch A:**

- Unmap the destination *MAC* address.

```
iS5comm(config)# interface gigabitethernet 0/1
```

```
iS5comm(config-if)# no lldp dest-mac 00:02:02:03:04:01
```

```
iS5comm(config)# exit
```

**At Switch B:**

- Unmap the destination *MAC* address.

```
iS5comm(config)# interface gigabitethernet 0/1
```

```
iS5comm(config-if)# no lldp dest-mac 00:01:02:03:04:01
```

```
iS5comm(config)# exit
```

5. At Switch A: verify the destination *MAC* address using the following command.

FOR EXAMPLE: Perform the following:

```
iS5comm# show lldp interface gigabitethernet 0/1
```

```
Gi0/1:
```

```
Tx State           : Enabled
```

```
Rx State           : Enabled
```

```
Tx SEM State       : INITIALIZE
```

```
Rx SEM State       : WAIT PORT OPERATIONAL
```

```
Notification Status : Disabled
```

```
Notification Type   : Mis-configuration
```

```
DestinationMacAddr  : 01:80:c2:00:00:0e
```

6. At Switch B: verify the destination *MAC* address using the following command.

FOR EXAMPLE: Perform the following:

```
iS5comm# show lldp interface gigabitethernet 0/1
```

```
Gi0/1:
```

```
Tx State           : Enabled
```

```
Rx State           : Enabled
```

```
Tx SEM State       : INITIALIZE
```

```
Rx SEM State       : WAIT PORT OPERATIONAL
```

```
Notification Status : Disabled
```

```
Notification Type   : Mis-configuration
```

```
DestinationMacAddr  : 01:80:c2:00:00:0e
```

## 3.22. Configuration of LLDP Multiple Neighbor MAC Address

### CONTEXT:

According to latest *LLDP* specification 802.1AB-2009, *LLDP* supports multiple *LLDP* agents on the same interface. This section configures *LLDP* stack for multiple agents.

#### At Switch A, B, C & D:

1. Enable the *LLDP* Version 2 on all switches.

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
iS5comm(config)# set lldp enable
iS5comm(config)# set lldp version v2
```

2. Configure the destination *MAC* address for port 1 and 2.

FOR EXAMPLE: Type the following:

#### At Switch A:

- Configure the destination *MAC* address.

```
iS5comm(config)# interface gigabitethernet 0/1
iS5comm(config-if)# lldp dest-mac 00:02:02:03:04:01
iS5comm(config-if)# lldp dest-mac 00:03:02:03:04:01
iS5comm(config-if)# exit
iS5comm(config)# interface gigabitethernet 0/2
iS5comm(config-if)# lldp dest-mac 00:04:02:03:04:01
iS5comm(config-if)# end
```

#### At Switch B:

- Configure the destination *MAC* address.

```
iS5comm(config)# interface gigabitethernet 0/1
iS5comm(config-if)# lldp dest-mac 00:01:02:03:04:01
iS5comm(config)# exit
```

#### At Switch C:

- Configure the destination *MAC* address.

```
iS5comm(config)# interface gigabitethernet 0/1
iS5comm(config-if)# lldp dest-mac 00:01:02:03:04:01
iS5comm(config)# exit
```

#### At Switch D:

- Configure the destination *MAC* address.

```
iS5comm(config)# interface gigabitethernet 0/1
iS5comm(config-if)# lldp dest-mac 00:01:02:03:04:02
iS5comm(config)# exit
```

3. At Switch A: verify the neighbors configuration using the show command as shown below.

FOR EXAMPLE: Perform the following:

```
iS5comm# show lldp neighbors
```

Capability Codes :

(R) Router, (B) Bridge, (T) Telephone, (C) DOCSIS Cable Device,  
(W) WLAN Access Point, (P) Repeater, (S) Station, (O) Other

Chassis ID	Local Intf	Hold-time	Capability	Port Id
-----	-----	-----	-----	-----
00:02:02:03:04:01	Gi0/1	120		Gi0/1
00:03:02:03:04:01	Gi0/1	120		Gi0/1
00:04:02:03:04:01	Gi0/2	120		Gi0/1

Total Entries Displayed: 3

4. At Switch B: verify the neighbors configuration using the show command as shown below.

FOR EXAMPLE: Perform the following:

```
iS5comm# show lldp neighbors
```

Capability Codes :

(R) Router, (B) Bridge, (T) Telephone, (C) DOCSIS Cable Device,  
(W) WLAN Access Point, (P) Repeater, (S) Station, (O) Other

Chassis ID	Local Intf	Hold-time	Capability	Port Id
-----	-----	-----	-----	-----
00:01:02:03:04:01	Gi0/1	120		Gi0/1

Total Entries Displayed: 1

5. At Switch C: verify the neighbors configuration using the show command as shown below.

FOR EXAMPLE: Perform the following:

```
iS5comm# show lldp neighbors
```

Capability Codes :

(R) Router, (B) Bridge, (T) Telephone, (C) DOCSIS Cable Device,  
(W) WLAN Access Point, (P) Repeater, (S) Station, (O) Other

Chassis ID	Local Intf	Hold-time	Capability	Port Id
-----	-----	-----	-----	-----
00:01:02:03:04:01	Gi0/1	120		Gi0/1

Total Entries Displayed: 1

6. At Switch D: verify the neighbors configuration using the show command as shown below.

FOR EXAMPLE: Perform the following:

```
iS5comm# show lldp neighbors
```

Capability Codes :

(R) Router, (B) Bridge, (T) Telephone, (C) DOCSIS Cable Device,  
(W) WLAN Access Point, (P) Repeater, (S) Station, (O) Other

Chassis ID	Local Intf	Hold-time	Capability	Port Id
-----	-----	-----	-----	-----
00:01:02:03:04:02	Gi0/1	120		Gi0/2

Total Entries Displayed: 1

### 3.23. Configuration of LLDP Management VID

CONTEXT:

Management VID is a new TLV supported for compliance with LLDP specification 802.1AB-2009. Refer to Section 3.2 for LLDP-V2 Topology.

**At Switch A, B, C & D:**

1. Enable the LLDP Version 2 on all switches.

FOR EXAMPLE: Type the following:

– Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

```
iS5comm(config)# set lldp enable
```

```
iS5comm(config)# set lldp version v2
```

2. **At Switch A:** enable management VID (VLAN ID) in the switch.

FOR EXAMPLE: Type the following:

– Configure the destination MAC address.

```
iS5comm(config)# interface gigabitethernet 0/1
```

```
iS5comm(config-if)# lldp tlv-select dot1tlv vid-usage-digest
```

```
iS5comm(config-if)# lldp tlv-select dot1tlv mgmt-vid
```

```
iS5comm(config-if)# end
```

– Verify the management VID using the show command as given below.

```
iS5comm# show lldp local gigabitethernet 0/1
```

```
Port Id SubType          : Interface Alias
```

```
Port Id                  : Gi0/1
```

```
Port Description         : Ethernet Interface Port 01
```

```
Enabled Tx Tlvs          : Port Description, System Name,
```

System Description, System Capability,  
Management Address

Extended 802.3 TLV Info

-MAC PHY Configuration & Status

Auto-Neg Support & Status : ,  
Advertised Capability Bits : 0000  
Operational MAU Type : 0  
-Maximum Frame Size : 1500

Extended 802.1 TLV Info

-Port VLAN Id : 1

-Port & Protocol VLAN Id

Protocol VLAN Id	Support	Protocol VLAN Status	TxStatus
-----	-----	-----	-----
0	Supported	Enabled	Disabled

-Vlan Name

Vlan Id	Vlan Name	TxStatus
-----	-----	-----
1		Disabled

-Link Aggregation

Capability & Status : Not Capable, Not In Aggregation  
Aggregated Port Id : 0

-VID TLV:

VID	TxStatus
-----	-----
1dcdf777	Enabled

-Management Vid TLV:

Vlan Id	TxStatus
-----	-----
1	Enabled

LLDP-MED Admin Status : Disabled

-LLDP-MED Capability TLV

LLDP-MED Tx Supported : MedCapability, NetworkPolicy,

```

LocationIdentity,
Ex-PowerViaMDI-PSE, Inventory
LLDP-MED Tx Enabled          :

-LLDP-MED Network Policy TLV
Application Type              :
Unknown Policy Flag          :
VlanType                     :
VlanID                       :
Priority                     :
Dscp                         :

-LLDP-MED Location TLV Info
Location Subtype              :
Location Info                 :

-LLDP-MED Ex-PowerViaMDI TLV Info
Power Priority                 : Critical
Power Value                   : 1000
-----

```

3. At Switch B, verify the management *VID* using the show command as given below;

FOR EXAMPLE: Type the following

```
is5comm# show lldp neighbors detail
```

Capability Codes:

(R) Router, (B) Bridge, (T) Telephone, (C) DOCSIS Cable Device,  
(W) WLAN Access Point, (P) Repeater, (S) Station, (O) Other

```

Chassis Id SubType           : Mac Address
Chassis Id                   : e8:e8:75:90:0b:01
Port Id SubType              : Interface Alias
Port Id                      : Gi0/1
Port Description              : Not Advertised
System Name                  : Not Advertised
System Desc                  : Not Advertised
Local Intf                   : Gi0/1
Time Remaining               : 104 Seconds
System Capabilities Tlv      : Not Advertised
Management Address           : Not Advertised

```

```
Extended 802.3 TLV Info
```

```

-MAC PHY Configuration & Status
Auto Negotiation Tlv          : Not Advertised
-Link Aggregation
Link Aggregation Tlv          : Not Advertised
-Maximum Frame Size Tlv       : Not Advertised
Extended 802.1 TLV Info
-Port VLAN Tlv                : Not Advertised
-Port & Protocol VLAN Id
Protocol Vlan Tlv             : Not Advertised
-Vlan Name
Vlan Name Tlv                 : Not Advertised
-VID TLV:0
-Management Vid TLV      :1

```

4. At Switch C, verify the management VID using the show command as given below;

FOR EXAMPLE: Type the following

```
iS5comm# show lldp neighbors detail
```

Capability Codes:

(R) Router, (B) Bridge, (T) Telephone, (C) DOCSIS Cable Device,  
(W) WLAN Access Point, (P) Repeater, (S) Station, (O) Other

```

Chassis Id SubType           : Mac Address
Chassis Id                   : e8:e8:75:90:0b:01
Port Id SubType              : Interface Alias
Port Id                      : Gi0/1
Port Description              : Not Advertised
System Name                  : Not Advertised
System Desc                  : Not Advertised
Local Intf                   : Gi0/1
Time Remaining               : 104 Seconds
System Capabilities Tlv      : Not Advertised
Management Address           : Not Advertised

```

Extended 802.3 TLV Info

```

-MAC PHY Configuration & Status
Auto Negotiation Tlv          : Not Advertised
-Link Aggregation
Link Aggregation Tlv          : Not Advertised
-Maximum Frame Size Tlv       : Not Advertised
Extended 802.1 TLV Info
-Port VLAN Tlv                : Not Advertised

```



```

-Port & Protocol VLAN Id
Protocol Vlan Tlv           : Not Advertised
-Vlan Name
Vlan Name Tlv              : Not Advertised
-VID TLV:0
-Management Vid TLV      :1

```

5. At Switch D, verify the management VID using the show command as given below;

FOR EXAMPLE: Type the following

```
iS5comm# show lldp neighbors detail
```

Capability Codes:

(R) Router, (B) Bridge, (T) Telephone, (C) DOCSIS Cable Device,  
(W) WLAN Access Point, (P) Repeater, (S) Station, (O) Other

```

Chassis Id SubType          : Mac Address
Chassis Id                  : 00:01:02:03:04:01
Port Id SubType             : Interface Alias
Port Id                     : Gi0/2
Port Description            : Not Advertised
System Name                 : Not Advertised
System Desc                 : Not Advertised
Local Intf                  : Gi0/1
Time Remaining              : 104 Seconds
System Capabilities Tlv     : Not Advertised
Management Address          : Not Advertised

```

Extended 802.3 TLV Info

-MAC PHY Configuration & Status

```

Auto Negotiation Tlv        : Not Advertised
-Link Aggregation
Link Aggregation Tlv        : Not Advertised
-Maximum Frame Size Tlv     : Not Advertised
Extended 802.1 TLV Info
-Port VLAN Tlv              : Not Advertised
-Port & Protocol VLAN Id
Protocol Vlan Tlv           : Not Advertised
-Vlan Name
Vlan Name Tlv              : Not Advertised
-VID TLV:0
-Management Vid TLV      :1

```

## 3.24. Configuration of LLDP VID Digest

### CONTEXT:

*LLDP VID Digest* is a new *TLV* supported for compliance with *LLDP* specification 802.1AB-2009. Refer to Section 3.2 for *LLDP-V2 Topology*.

### At Switch A, B, C & D:

1. Enable the *LLDP* Version 2 on all switches.

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
iS5comm(config)# set lldp enable
iS5comm(config)# set lldp version v2
```

2. **At Switch A:** Enable Management *VID* in the switch.

FOR EXAMPLE: Type the following:

- Configure the destination MAC address.

```
iS5comm(config)# interface gigabitethernet 0/1
iS5comm(config-if)# lldp tlv-select dot1tlv vid-usage-digest
iS5comm(config-if)# lldp tlv-select dot1tlv mgmt-vid
iS5comm(config-if)# end
```

- Verify the management *VID* using the show command as given below.

```
iS5comm# show lldp local gigabitethernet 0/1
Port Id SubType           : Interface Alias
Port Id                   : Gi0/1
Port Description          : Ethernet Interface Port 01
Enabled Tx Tlvs           : Port Description, System Name,
System Description, System Capability,
Management Address
```

Extended 802.3 TLV Info

-MAC PHY Configuration & Status

```
Auto-Neg Support & Status : ,
Advertised Capability Bits : 0000
Operational MAU Type      : 0
-Maximum Frame Size      : 1500
```

Extended 802.1 TLV Info

-Port VLAN Id : 1

-Port & Protocol VLAN Id

Protocol VLAN Id	Support	Protocol VLAN Status	TxStatus
------------------	---------	----------------------	----------

-----	-----	-----	-----
0	Supported	Enabled	Disabled

-Vlan Name

Vlan Id	Vlan Name	TxStatus
---------	-----------	----------

-----	-----	-----
1		Disabled

-Link Aggregation

Capability & Status : Not Capable, Not In Aggregation

Aggregated Port Id : 0

-VID TLV:

VID	TxStatus
-----	----------

-----	-----
1dcdf777	Enabled

-Management Vid TLV:

Vlan Id	TxStatus
---------	----------

-----	-----
1	Enabled

LLDP-MED Admin Status : Disabled

-LLDP-MED Capability TLV

LLDP-MED Tx Supported : MedCapability, NetworkPolicy,  
LocationIdentity,  
Ex-PowerViaMDI-PSE, Inventory  
LLDP-MED Tx Enabled :

-LLDP-MED Network Policy TLV

Application Type :  
Unknown Policy Flag :  
VlanType :  
VlanID :  
Priority :  
Dscp :

-LLDP-MED Location TLV Info

Location Subtype :

```

Location Info                                     :

-LLDP-MED Ex-PowerViaMDI TLV Info
Power Priority                                   : Critical
Power Value                                     : 1000
-----

```

3. At Switch B, verify the management VID using the show command as given below;

FOR EXAMPLE: Type the following

```
iS5comm# show lldp neighbors detail
```

Capability Codes:

(R) Router, (B) Bridge, (T) Telephone, (C) DOCSIS Cable Device,  
(W) WLAN Access Point, (P) Repeater, (S) Station, (O) Other

```

Chassis Id SubType           : Mac Address
Chassis Id                   : e8:e8:75:90:0b:01
Port Id SubType              : Interface Alias
Port Id                      : Gi0/1
Port Description              : Not Advertised
System Name                   : Not Advertised
System Desc                   : Not Advertised
Local Intf                   : Gi0/1
Time Remaining                : 104 Seconds
System Capabilities Tlv      : Not Advertised
Management Address           : Not Advertised

```

Extended 802.3 TLV Info

-MAC PHY Configuration & Status

```
Auto Negotiation Tlv         : Not Advertised
```

-Link Aggregation

```
Link Aggregation Tlv         : Not Advertised
```

```
-Maximum Frame Size Tlv      : Not Advertised
```

Extended 802.1 TLV Info

```
-Port VLAN Tlv               : Not Advertised
```

-Port & Protocol VLAN Id

```
Protocol Vlan Tlv           : Not Advertised
```

-Vlan Name

```
Vlan Name Tlv               : Not Advertised
```

**-VID TLV:0**

```
-Management Vid TLV        :1
```

4. At Switch C, verify the management *VID* using the show command as given below;

FOR EXAMPLE: Type the following

```
iS5comm# show lldp neighbors detail
```

Capability Codes:

(R) Router, (B) Bridge, (T) Telephone, (C) DOCSIS Cable Device,  
(W) WLAN Access Point, (P) Repeater, (S) Station, (O) Other

```
Chassis Id SubType      : Mac Address
Chassis Id              : e8:e8:75:90:0b:01
Port Id SubType         : Interface Alias
Port Id                 : Gi0/1
Port Description        : Not Advertised
System Name             : Not Advertised
System Desc             : Not Advertised
Local Intf              : Gi0/1
Time Remaining          : 104 Seconds
System Capabilities Tlv : Not Advertised
Management Address      : Not Advertised
```

Extended 802.3 TLV Info

-MAC PHY Configuration & Status

```
Auto Negotiation Tlv      : Not Advertised
```

-Link Aggregation

```
Link Aggregation Tlv      : Not Advertised
```

```
-Maximum Frame Size Tlv   : Not Advertised
```

Extended 802.1 TLV Info

```
-Port VLAN Tlv            : Not Advertised
```

-Port & Protocol VLAN Id

```
Protocol Vlan Tlv         : Not Advertised
```

-Vlan Name

```
Vlan Name Tlv             : Not Advertised
```

-VID TLV:0

**-Management Vid TLV :1**

5. At Switch D, verify the management *VID* using the show command as given below;

FOR EXAMPLE: Type the following

```
iS5comm# show lldp neighbors detail
```

Capability Codes:

(R) Router, (B) Bridge, (T) Telephone, (C) DOCSIS Cable Device,  
(W) WLAN Access Point, (P) Repeater, (S) Station, (O) Other

---

Chassis Id SubType	: Mac Address
Chassis Id	: 00:01:02:03:04:01
Port Id SubType	: Interface Alias
Port Id	: Gi0/2
Port Description	: Not Advertised
System Name	: Not Advertised
System Desc	: Not Advertised
Local Intf	: Gi0/1
Time Remaining	: 104 Seconds
System Capabilities Tlv	: Not Advertised
Management Address	: Not Advertised

## Extended 802.3 TLV Info

## -MAC PHY Configuration &amp; Status

Auto Negotiation Tlv	: Not Advertised
----------------------	------------------

## -Link Aggregation

Link Aggregation Tlv	: Not Advertised
----------------------	------------------

-Maximum Frame Size Tlv	: Not Advertised
-------------------------	------------------

## Extended 802.1 TLV Info

-Port VLAN Tlv	: Not Advertised
----------------	------------------

## -Port &amp; Protocol VLAN Id

Protocol Vlan Tlv	: Not Advertised
-------------------	------------------

## -Vlan Name

Vlan Name Tlv	: Not Advertised
---------------	------------------

## -VID TLV:0

<b>-Management Vid TLV</b>	<b>:1</b>
----------------------------	-----------

# Configuring LLDP-MED

## 4. LLDP-MED Configuration

The following sections describe the configuration of *LLDP-MED* (Media Endpoint Discovery).

### 4.1. Enabling LLDP-MED Organizationally Specific TLVs

This section describes configuration of enabling *LLDP-MED* Organizationally Specific *TLVs* for transmission, whose transmission status is set to Disabled by default. The following are the *TLVs* in *LLDP-MED*:

- MedCapability *TLV*
- Network Policy *TLV*
- Inventory Management *TLV*
- Location Identification *TLV*
- Extended Power-Via- *MDI TLV*

#### Enabling LLDP-MED Capability TLV

CONTEXT:

**At Switch A:**

Configure the *LLDP* module status as enabled. Refer to section “Enabling LLDP” for configuring *LLDP* module status.

#### CLI Configuration

1. Enable *LLDP-MED* Capability *TLV* by executing the following commands.

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Enable *LLDP-MED* Capability *TLV* on port P1.

```
iS5comm(config)# interface gigabitethernet 0/1
```

```
iS5comm(config-if)# lldp med-tlv-select med-capability
```

```
iS5comm(config-if)# end
```

2. View the local system information by executing the following command

FOR EXAMPLE: Type the following:

```

iS5comm# show lldp local gigabitethernet 0/1
Port Id SubType          : Interface Alias
Port Id                  : Gi0/1
Port Description         : Ethernet Interface Port 01
Enabled Tx Tlvs          : Port Description, System Name,
System Description, System Capability,
Management Address

Extended 802.3 TLV Info
-MAC PHY Configuration & Status
Auto-Neg Support & Status : ,
Advertised Capability Bits : 0000
Operational MAU Type      : 0
-Maximum Frame Size       : 1500

Extended 802.1 TLV Info
-Port VLAN Id             : 1
-Port & Protocol VLAN Id

Protocol VLAN Id      Support      Protocol VLAN Status      TxStatus
-----
0                     Supported    Enabled                     Disabled

-Vlan Name
Vlan Id              Vlan Name              TxStatus
-----
1                     Disabled

-Link Aggregation
Capability & Status    : Not Capable, Not In Aggregation
Aggregated Port Id     : 0

-VID TLV:
VID                  TxStatus
-----
1dcd7f777           Enabled

-Management Vid TLV:
Vlan Id              TxStatus
-----
1                     Enabled

```



```
LLDP-MED Admin Status      : Disabled
```

```
-LLDP-MED Capability TLV
```

```
LLDP-MED Tx Supported      : MedCapability, NetworkPolicy,
LocationIdentity,
Ex-PowerViaMDI-PSE, Inventory
```

```
LLDP-MED Tx Enabled :MedCapability
```

```
-LLDP-MED Network Policy TLV
```

```
Application Type           :
Unknown Policy Flag        :
VlanType                   :
VlanID                     :
Priority                   :
Dscp                       :
```

```
-LLDP-MED Location TLV Info
```

```
Location Subtype           :
Location Info               :
```

```
-LLDP-MED Ex-PowerViaMDI TLV Info
```

```
Power Priority              : Critical
Power Value                 : 1000
```

```
-----
```

3. View the information about neighbors learnt on a particular interface by executing the following command;

FOR EXAMPLE: Type the following

```
iS5comm# show lldp neighbors detail
```

Capability Codes:

(R) Router, (B) Bridge, (T) Telephone, (C) DOCSIS Cable Device,  
(W) WLAN Access Point, (P) Repeater, (S) Station, (O) Other

```
Chassis Id SubType         : Mac Address
Chassis Id                 : e8:e8:75:90:0b:01
Port Id SubType            : Interface Alias
Port Id                    : Gi0/1
Port Description           : Not Advertised
System Name                : Not Advertised
System Desc                : Not Advertised
```

```

Local Intf                : Gi0/1
Time Remaining            : 104 Seconds
System Capabilities Tlv   : Not Advertised
Management Address        : Not Advertised

Extended 802.3 TLV Info
-MAC PHY Configuration & Status
Auto Negotiation Tlv      : Not Advertised
-Link Aggregation
Link Aggregation Tlv      : Not Advertised
-Maximum Frame Size Tlv   : Not Advertised
Extended 802.1 TLV Info
-Port VLAN Tlv           : Not Advertised
-Port & Protocol VLAN Id
Protocol Vlan Tlv         : Not Advertised
-Vlan Name
Vlan Name Tlv            : Not Advertised
-VID TLV:0
-Management Vid TLV      :0
-LLDP MED Capability TLV
Capabilities Supported     : MedCapability, NetworkPolicy, Inventory
Capabilities Enabled      : MedCapability
Device Class              : Endpoint Class III

-LLDP MED Inventory TLV   : Not Advertised
Hardware Revision         : 0
Firmware Revision        : 0
Software Revision         : 0
Serial Number             : 0

```

## Enabling LLDP-MED Capability TLV for Destination MAC Address

CONTEXT:

### At Switch A:

Configure the *LLDP* module status as enabled. Refer to section “Enabling LLDP” for configuring *LLDP* module status.

1. Enable *LLDP-MED* Capability TLV for specific destination mac-address by executing the following commands

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Configure destination mac-address and enable *LLDP-MED* Capability TLV for that specific destination mac-address on port P1.

```
iS5comm(config)# interface gigabitethernet 0/1
```

```
iS5comm(config-if)# lldp dest-mac 00:02:04:05:06:07
```

```
iS5comm(config-if)# lldp med-tlv-select med-capability mac-address  
00:02:04:05:06:07
```

```
iS5comm(config-if)# end
```

## 2. View the local system information by executing the following command.

FOR EXAMPLE: Type the following:

```
iS5comm# show lldp local gigabitethernet 0/1 mac-address 00:02:04:05:06:07
```

```
Port Id SubType                : Interface Alias
```

```
Port Id                        : Gi0/1
```

```
Port Description               : Ethernet Interface Port 01
```

```
Enabled Tx Tlvs                : Port Description, System Name,
```

```
System Description, System Capability,
```

```
Management Address
```

```
Extended 802.3 TLV Info
```

```
-MAC PHY Configuration & Status
```

```
Auto-Neg Support & Status      : ,
```

```
Advertised Capability Bits     : 0000
```

```
Operational MAU Type           : 0
```

```
-Maximum Frame Size            : 1500
```

```
Extended 802.1 TLV Info
```

```
-Port VLAN Id                  : 1
```

```
-Port & Protocol VLAN Id
```

Protocol VLAN Id	Support	Protocol VLAN Status	TxStatus
0	Supported	Enabled	Disabled

0	Supported	Enabled	Disabled
---	-----------	---------	----------

0	Supported	Enabled	Disabled
---	-----------	---------	----------

```
-Vlan Name
```

Vlan Id	Vlan Name	TxStatus
1		Disabled

1		Disabled
---	--	----------

1		Disabled
---	--	----------

```
-Link Aggregation
```

```
Capability & Status            : Not Capable, Not In Aggregation
```

```
Aggregated Port Id            : 0
```

-VID TLV:

VID	TxStatus
-----	-----
1dcdf777	Enabled

**-Management Vid TLV:**

Vlan Id	TxStatus
-----	-----
1	Enabled

LLDP-MED Admin Status : Disabled

-LLDP-MED Capability TLV

LLDP-MED Tx Supported : MedCapability, NetworkPolicy,  
LocationIdentity,  
Ex-PowerViaMDI-PSE, Inventory  
LLDP-MED Tx Enabled :MedCapability

-LLDP-MED Network Policy TLV

Application Type	:
Unknown Policy Flag	:
VlanType	:
VlanID	:
Priority	:
Dscp	:

-LLDP-MED Location TLV Info

Location Subtype	:
Location Info	:

-LLDP-MED Ex-PowerViaMDI TLV Info

Power Priority	: Critical
Power Value	: 1000

-----

## Disabling LLDP-MED Capability TLV

CONTEXT:

**At Switch A:**

Configure the *LLDP* module status as enabled. Refer to section “Enabling LLDP” for configuring *LLDP* module status.

### CLI Configuration

1. Disable *LLDP-MED* Capability TLV by executing the following commands;

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

2. Disable *LLDP-MED* Capability TLV by executing the following commands.

FOR EXAMPLE: Type the following:

- Disable *LLDP-MED* Capability TLV on port P1

```
iS5comm(config)# interface gigabitethernet 0/1
```

```
iS5comm(config-if)# no lldp med-tlv-select med-capability
```

```
iS5comm(config-if)# end
```

- View the local system information by executing the following command.

```
iS5comm# show lldp local gigabitethernet 0/1
```

```
Port Id SubType          : Interface Alias
```

```
Port Id                  : Gi0/1
```

```
Port Description         : Ethernet Interface Port 01
```

```
Enabled Tx Tlvs          : Port Description, System Name,
```

```
System Description, System Capability,
```

```
Management Address
```

```
Extended 802.3 TLV Info
```

```
-MAC PHY Configuration & Status
```

```
Auto-Neg Support & Status : ,
```

```
Advertised Capability Bits : 0000
```

```
Operational MAU Type      : 0
```

```
-Maximum Frame Size       : 1500
```

```
Extended 802.1 TLV Info
```

```
-Port VLAN Id             : 1
```

```
-Port & Protocol VLAN Id
```

Protocol VLAN Id	Support	Protocol VLAN Status	TxStatus
0	Supported	Enabled	Disabled

Protocol VLAN Id	Support	Protocol VLAN Status	TxStatus
0	Supported	Enabled	Disabled

Protocol VLAN Id	Support	Protocol VLAN Status	TxStatus
0	Supported	Enabled	Disabled

```
-Vlan Name
```

Vlan Id	Vlan Name	TxStatus
-----	-----	-----

Vlan Id	Vlan Name	TxStatus
-----	-----	-----

```

1                                     Disabled

-Link Aggregation
Capability & Status                  : Not Capable, Not In Aggregation
Aggregated Port Id                   : 0

-VID TLV:
VID          TxStatus
-----
1dcdf777     Enabled

-Management Vid TLV:
Vlan Id      TxStatus
-----
1            Enabled

LLDP-MED Admin Status                : Disabled

-LLDP-MED Capability TLV
LLDP-MED Tx Supported                 : MedCapability, NetworkPolicy,
LocationIdentity,
Ex-PowerViaMDI-PSE, Inventory
LLDP-MED Tx Enabled:

-LLDP-MED Network Policy TLV
Application Type                      :
Unknown Policy Flag                   :
VlanType                             :
VlanID                               :
Priority                              :
Dscp                                  :

-LLDP-MED Location TLV Info
Location Subtype                      :
Location Info                         :

-LLDP-MED Ex-PowerViaMDI TLV Info
Power Priority                        : Critical
Power Value                          : 1000
-----

```

3. View the information about neighbors learnt on a particular interface by executing the following command;

FOR EXAMPLE: Type the following

```
iS5comm# show lldp neighbors detail
```

Capability Codes:

(R) Router, (B) Bridge, (T) Telephone, (C) DOCSIS Cable Device,  
(W) WLAN Access Point, (P) Repeater, (S) Station, (O) Other

```
Chassis Id SubType      : Mac Address
Chassis Id              : e8:e8:75:90:0b:01
Port Id SubType         : Interface Alias
Port Id                 : Gi0/1
Port Description        : Not Advertised
System Name             : Not Advertised
System Desc             : Not Advertised
Local Intf              : Gi0/1
Time Remaining          : 104 Seconds
System Capabilities Tlv : Not Advertised
Management Address      : Not Advertised
```

Extended 802.3 TLV Info

-MAC PHY Configuration & Status

```
Auto Negotiation Tlv      : Not Advertised
```

-Link Aggregation

```
Link Aggregation Tlv      : Not Advertised
```

```
-Maximum Frame Size Tlv   : Not Advertised
```

Extended 802.1 TLV Info

```
-Port VLAN Tlv            : Not Advertised
```

-Port & Protocol VLAN Id

```
Protocol Vlan Tlv         : Not Advertised
```

-Vlan Name

```
Vlan Name Tlv             : Not Advertised
```

**-VID TLV:0**

```
-Management Vid TLV       :0
```

-LLDP MED Capability TLV

```
Capabilities Supported     : MedCapability, NetworkPolicy, Inventory
```

```
Capabilities Enabled       : MedCapability
```

```
Device Class               : Endpoint Class III
```

```
-LLDP MED Inventory TLV   : Not Advertised
```

```

Hardware Revision      : 0
Firmware Revision     : 0
Software Revision      : 0
Serial Number         : 0

```

## Disabling LLDP-MED Capability TLV for Destination MAC Address

CONTEXT:

### At Switch A:

Configure the *LLDP* module status as enabled. Refer to section “Enabling LLDP” for configuring *LLDP* module status.

1. Disable *LLDP-MED* Capability TLV for specific destination mac-address by executing the following commands.

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Disable *LLDP-MED* Capability TLV for that specific destination mac-address on port P1.

```
iS5comm(config)# interface gigabitethernet 0/1
```

```
iS5comm(config-if)# no lldp dest-mac 00:02:04:05:06:07
```

```
iS5comm(config-if)# end
```

2. View the local system information by executing the following command.

FOR EXAMPLE: Type the following:

```
iS5comm# show lldp local gigabitethernet 0/1 mac-address 00:02:04:05:06:07
```

```
Port Id SubType          : Interface Alias
```

```
Port Id                  : Gi0/1
```

```
Port Description         : Ethernet Interface Port 01
```

```
Enabled Tx Tlvs          : Port Description, System Name,
```

```
System Description, System Capability,
```

```
Management Address
```

```
Extended 802.3 TLV Info
```

```
-MAC PHY Configuration & Status
```

```
Auto-Neg Support & Status : ,
```

```
Advertised Capability Bits : 0000
```

```
Operational MAU Type      : 0
```

```
-Maximum Frame Size       : 1500
```

```
Extended 802.1 TLV Info
```

```
-Port VLAN Id             : 1
```



**-Port & Protocol VLAN Id**

Protocol VLAN Id	Support	Protocol VLAN Status	TxStatus
-----	-----	-----	-----
0	Supported	Enabled	Disabled

**-Vlan Name**

Vlan Id	Vlan Name	TxStatus
-----	-----	-----
1		Disabled

**-Link Aggregation**

Capability & Status : Not Capable, Not In Aggregation  
 Aggregated Port Id : 0

**-VID TLV:**

VID	TxStatus
-----	-----
1dcdf777	Enabled

**-Management Vid TLV:**

Vlan Id	TxStatus
-----	-----
1	Enabled

LLDP-MED Admin Status : Disabled

**-LLDP-MED Capability TLV**

LLDP-MED Tx Supported : MedCapability, NetworkPolicy,  
 LocationIdentity,  
 Ex-PowerViaMDI-PSE, Inventory  
 LLDP-MED Tx Enabled :

**-LLDP-MED Network Policy TLV**

Application Type :  
 Unknown Policy Flag :  
 VlanType :  
 VlanID :  
 Priority :  
 Dscp :

```

-LLDP-MED Location TLV Info
Location Subtype          :
Location Info             :

-LLDP-MED Ex-PowerViaMDI TLV Info
Power Priority             : Critical
Power Value               : 1000
-----

```

## Enabling Network Policy TLV

CONTEXT:

### At Switch A:

Configure the *LLDP* module status as enabled. Refer to section “Enabling LLDP” for configuring *LLDP* module status.

### CLI Configuration

1. Enable *LLDP-MED* Network Policy TLV by executing the following commands;

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Enable *LLDP-MED* Network Policy TLV on port P1.

```
iS5comm(config)# interface gigabitethernet 0/1
```

```
iS5comm(config-if)# lldp med-tlv-select network-policy
```

```
iS5comm(config-if)# end
```

2. View the local system information by executing the following command

FOR EXAMPLE: Type the following:

```
iS5comm# show lldp local gigabitethernet 0/1
```

```
Port Id SubType          : Interface Alias
```

```
Port Id                  : Gi0/1
```

```
Port Description         : Ethernet Interface Port 01
```

```
Enabled Tx Tlvs          : Port Description, System Name,
```

```
System Description, System Capability,
```

```
Management Address
```

```
Extended 802.3 TLV Info
```

```
-MAC PHY Configuration & Status
```

```
Auto-Neg Support & Status : ,
```

```
Advertised Capability Bits : 0000
```

```

Operational MAU Type           : 0
-Maximum Frame Size           : 1500

Extended 802.1 TLV Info
-Port VLAN Id                  : 1
-Port & Protocol VLAN Id

Protocol VLAN Id      Support      Protocol VLAN Status      TxStatus
-----
0                     Supported    Enabled                    Disabled

-Vlan Name
Vlan Id              Vlan Name              TxStatus
-----
1                     Disabled

-Link Aggregation
Capability & Status      : Not Capable, Not In Aggregation
Aggregated Port Id      : 0

-VID TLV:
VID                   TxStatus
-----
1dcdf777             Enabled

-Management Vid TLV:
Vlan Id              TxStatus
-----
1                     Enabled

LLDP-MED Admin Status      : Disabled

-LLDP-MED Capability TLV
LLDP-MED Tx Supported      : MedCapability, NetworkPolicy,
LocationIdentity,
Ex-PowerViaMDI-PSE, Inventory
LLDP-MED Tx Enabled :NetworkPolicy

-LLDP-MED Network Policy TLV
Application Type          :
Unknown Policy Flag       :
```

```

VlanType          :
VlanID            :
Priority           :
Dscp              :

-LLDP-MED Location TLV Info
Location Subtype   :
Location Info      :

-LLDP-MED Ex-PowerViaMDI TLV Info
Power Priority      : Critical
Power Value        : 1000
-----

```

3. View the information about neighbors learnt on a particular interface by executing the following command;

FOR EXAMPLE: Type the following

```
iS5comm# show lldp neighbors detail
```

Capability Codes:

(R) Router, (B) Bridge, (T) Telephone, (C) DOCSIS Cable Device,  
(W) WLAN Access Point, (P) Repeater, (S) Station, (O) Other

```

Chassis Id SubType      : Mac Address
Chassis Id              : e8:e8:75:90:0b:01
Port Id SubType         : Interface Alias
Port Id                 : Gi0/1
Port Description        : Not Advertised
System Name             : Not Advertised
System Desc             : Not Advertised
Local Intf              : Gi0/1
Time Remaining          : 104 Seconds
System Capabilities Tlv : Not Advertised
Management Address      : Not Advertised

```

```

Extended 802.3 TLV Info
-MAC PHY Configuration & Status
Auto Negotiation Tlv     : Not Advertised
-Link Aggregation
Link Aggregation Tlv     : Not Advertised
-Maximum Frame Size Tlv  : Not Advertised
Extended 802.1 TLV Info

```

```

-Port VLAN Tlv                : Not Advertised
-Port & Protocol VLAN Id
Protocol Vlan Tlv              : Not Advertised
-Vlan Name
Vlan Name Tlv                  : Not Advertised
-VID TLV:0
-Management Vid TLV           :0
-LLDP MED Capability TLV
Capabilities Supported          : MedCapability, NetworkPolicy, Inventory
Capabilities Enabled            : NetworkPolicy
Device Class                    : Endpoint Class III

-LLDP MED Inventory TLV        : Not Advertised
Hardware Revision               : 0
Firmware Revision               : 0
Software Revision               : 0
Serial Number                   : 0

```

## Enabling LLDP-MED Network TLV for Destination MAC Address

CONTEXT:

### At Switch A:

Configure the *LLDP* module status as enabled. Refer to section “Enabling LLDP” for configuring *LLDP* module status.

1. Enable *LLDP-MED* Network *TLV* for specific destination mac-address by executing the following commands

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Configure destination mac-address and enable *LLDP-MED* Network policy *TLV* for that specific destination mac-address on port P1.

```
iS5comm(config)# interface gigabitethernet 0/1
```

```
iS5comm(config-if)# lldp dest-mac 00:02:04:05:06:07
```

```
iS5comm(config-if)# lldp med-tlv-select network-policy mac-address
00:02:04:05:06:07
```

```
iS5comm(config-if)# end
```

2. View the local system information by executing the following command.

FOR EXAMPLE: Type the following:

```
iS5comm# show lldp local gigabitethernet 0/1 mac-address 00:02:04:05:06:07
```

```
Port Id SubType                : Interface Alias
```

```

Port Id                : Gi0/1
Port Description       : Ethernet Interface Port 01
Enabled Tx Tlvs       : Port Description, System Name,
System Description, System Capability,
Management Address

Extended 802.3 TLV Info
-MAC PHY Configuration & Status
Auto-Neg Support & Status : ,
Advertised Capability Bits : 0000
Operational MAU Type      : 0
-Maximum Frame Size      : 1500

Extended 802.1 TLV Info
-Port VLAN Id           : 1
-Port & Protocol VLAN Id
Protocol VLAN Id      Support   Protocol VLAN Status   TxStatus
-----
0                     Supported Enabled                 Disabled

-Vlan Name
Vlan Id      Vlan Name      TxStatus
-----
1                               Disabled

-Link Aggregation
Capability & Status      : Not Capable, Not In Aggregation
Aggregated Port Id      : 0

-VID TLV:
VID            TxStatus
-----
1dcdf777      Enabled

-Management Vid TLV:
Vlan Id      TxStatus
-----
1            Enabled

LLDP-MED Admin Status    : Disabled

```

```

-LLDP-MED Capability TLV
LLDP-MED Tx Supported           : MedCapability, NetworkPolicy,
LocationIdentity,
Ex-PowerViaMDI-PSE, Inventory
LLDP-MED Tx Enabled :NetworkPolicy

-LLDP-MED Network Policy TLV
Application Type                  :
Unknown Policy Flag               :
VlanType                         :
VlanID                           :
Priority                         :
Dscp                             :

-LLDP-MED Location TLV Info
Location Subtype                  :
Location Info                     :

-LLDP-MED Ex-PowerViaMDI TLV Info
Power Priority                    : Critical
Power Value                      : 1000
-----

```

## Disabling Network Policy TLV

CONTEXT:

### At Switch A:

Configure the *LLDP* module status as enabled. Refer to section “Enabling LLDP” for configuring *LLDP* module status.

1. Disable *LLDP-MED* Network Policy TLV by executing the following commands;

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Disable *LLDP-MED* Network Policy TLV on port P1.

```
iS5comm(config)# interface gigabitethernet 0/1
```

```
iS5comm(config-if)# no lldp med-tlv-select network-policy
```

```
iS5comm(config-if)# end
```

## 2. View the local system information by executing the following command

FOR EXAMPLE: Type the following:

```
iS5comm# show lldp local gigabitethernet 0/1
Port Id SubType          : Interface Alias
Port Id                  : Gi0/1
Port Description         : Ethernet Interface Port 01
Enabled Tx Tlvs          : Port Description, System Name,
System Description, System Capability,
Management Address

Extended 802.3 TLV Info
-MAC PHY Configuration & Status
Auto-Neg Support & Status : ,
Advertised Capability Bits : 0000
Operational MAU Type      : 0
-Maximum Frame Size       : 1500

Extended 802.1 TLV Info
-Port VLAN Id             : 1
-Port & Protocol VLAN Id

Protocol VLAN Id      Support      Protocol VLAN Status      TxStatus
-----
0                     Supported    Enabled                     Disabled

-Vlan Name
Vlan Id              Vlan Name                      TxStatus
-----
1                     Disabled

-Link Aggregation
Capability & Status    : Not Capable, Not In Aggregation
Aggregated Port Id     : 0

-VID TLV:
VID                  TxStatus
-----
1dcdcf777           Enabled

-Management Vid TLV:
Vlan Id              TxStatus
```



```

-----
1           Enabled

LLDP-MED Admin Status           : Disabled

-LLDP-MED Capability TLV
LLDP-MED Tx Supported           : MedCapability, NetworkPolicy,
LocationIdentity,
Ex-PowerViaMDI-PSE, Inventory
LLDP-MED Tx Enabled :

-LLDP-MED Network Policy TLV
Application Type                 :
Unknown Policy Flag              :
VlanType                        :
VlanID                          :
Priority                        :
Dscp                            :

-LLDP-MED Location TLV Info
Location Subtype                 :
Location Info                    :

-LLDP-MED Ex-PowerViaMDI TLV Info
Power Priority                   : Critical
Power Value                     : 1000
-----

```

3. View the information about neighbors learnt on a particular interface by executing the following command;

FOR EXAMPLE: Type the following

```
iS5comm# show lldp neighbors detail
```

Capability Codes:

(R) Router, (B) Bridge, (T) Telephone, (C) DOCSIS Cable Device,  
(W) WLAN Access Point, (P) Repeater, (S) Station, (O) Other

```

Chassis Id SubType              : Mac Address
Chassis Id                      : e8:e8:75:90:0b:01
Port Id SubType                 : Interface Alias
Port Id                        : Gi0/1
Port Description                 : Not Advertised

```

```

System Name                : Not Advertised
System Desc                : Not Advertised
Local Intf                 : Gi0/1
Time Remaining             : 104 Seconds
System Capabilities Tlv    : Not Advertised
Management Address        : Not Advertised

```

#### Extended 802.3 TLV Info

##### -MAC PHY Configuration & Status

```
Auto Negotiation Tlv      : Not Advertised
```

##### -Link Aggregation

```
Link Aggregation Tlv     : Not Advertised
```

```
-Maximum Frame Size Tlv  : Not Advertised
```

#### Extended 802.1 TLV Info

```
-Port VLAN Tlv           : Not Advertised
```

##### -Port & Protocol VLAN Id

```
Protocol Vlan Tlv        : Not Advertised
```

##### -Vlan Name

```
Vlan Name Tlv            : Not Advertised
```

#### -VID TLV:0

```
-Management Vid TLV      :0
```

##### -LLDP MED Capability TLV

```
Capabilities Supported    : MedCapability, NetworkPolicy, Inventory
```

```
Capabilities Enabled      :
```

```
Device Class             : Endpoint Class III
```

```
-LLDP MED Inventory TLV  : Not Advertised
```

```
Hardware Revision        : 0
```

```
Firmware Revision        : 0
```

```
Software Revision        : 0
```

```
Serial Number            : 0
```

## Disabling LLDP-MED Network TLV for Destination MAC Address

CONTEXT:

**At Switch A:**

Configure the *LLDP* module status as enabled. Refer to section “Enabling LLDP” for configuring *LLDP* module status.

1. Disable *LLDP-MED* Network *TLV* for specific destination mac-address by executing the following commands:

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Configure destination mac-address and disable *LLDP-MED* network policy *TLV* for that specific destination mac-address on port P1.

```
iS5comm(config)# interface gigabitethernet 0/1
```

```
iS5comm(config-if)# no lldp med-tlv-select network-policy mac-address  
00:02:04:05:06:07
```

```
iS5comm(config-if)# end
```

2. At Switch A, view the local system information by executing the following command.

FOR EXAMPLE: Type the following:

```
iS5comm# show lldp local gigabitethernet 0/1 mac-address 00:02:04:05:06:07
```

```
Port Id SubType          : Interface Alias
```

```
Port Id                  : Gi0/1
```

```
Port Description         : Ethernet Interface Port 01
```

```
Enabled Tx Tlvs          : Port Description, System Name,
```

```
System Description, System Capability,
```

```
Management Address
```

```
Extended 802.3 TLV Info
```

```
-MAC PHY Configuration & Status
```

```
Auto-Neg Support & Status : ,
```

```
Advertised Capability Bits : 0000
```

```
Operational MAU Type      : 0
```

```
-Maximum Frame Size       : 1500
```

```
Extended 802.1 TLV Info
```

```
-Port VLAN Id             : 1
```

```
-Port & Protocol VLAN Id
```

Protocol VLAN Id	Support	Protocol VLAN Status	TxStatus
0	Supported	Enabled	Disabled

```
-Vlan Name
```

Vlan Id	Vlan Name	TxStatus
-----	-----	-----

```

1                                     Disabled

-Link Aggregation
Capability & Status                  : Not Capable, Not In Aggregation
Aggregated Port Id                   : 0

-VID TLV:
VID           TxStatus
-----
0             Disabled

-Management Vid TLV:
Vlan Id       TxStatus
-----
1             Disabled

LLDP-MED Admin Status                : Disabled

-LLDP-MED Capability TLV
LLDP-MED Tx Supported                 : MedCapability, NetworkPolicy, Inventory
LLDP-MED Tx Enabled :

-LLDP-MED Network Policy TLV
Application Type                      :
Unknown Policy Flag                   :
VlanType                             :
VlanID                               :
Priority                             :
Dscp                                  :

-LLDP-MED Location TLV Info
Location Subtype                      :
Location Info                         :

-LLDP-MED Ex-PowerViaMDI TLV Info
Power Priority                        : Critical
Power Value                          : 1000
-----

```

## Enabling Inventory Management TLV

CONTEXT:

### At Switch A:

Configure the *LLDP* module status as enabled. Refer to section “Enabling LLDP” for configuring *LLDP* module status.

### CLI Configuration

1. Enable *LLDP-MED* Inventory management *TLV* by executing the following commands;

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.

```
is5comm# configure terminal
```

- Enable *LLDP-MED* Inventory management *TLV* on port P1.

```
is5comm(config)# interface gigabitethernet 0/1
```

```
is5comm(config-if)# lldp med-tlv-select inventory-management
```

```
is5comm(config-if)# end
```

2. View the local system information by executing the following command.

FOR EXAMPLE: Type the following:

```
is5comm# show lldp local gigabitethernet 0/1
```

```
Port Id SubType           : Interface Alias
```

```
Port Id                   : Gi0/1
```

```
Port Description          : Ethernet Interface Port 01
```

```
Enabled Tx Tlvs           : Port Description, System Name,
```

```
System Description, System Capability,
```

```
Management Address
```

```
Extended 802.3 TLV Info
```

```
-MAC PHY Configuration & Status
```

```
Auto-Neg Support & Status : ,
```

```
Advertised Capability Bits : 0000
```

```
Operational MAU Type      : 0
```

```
-Maximum Frame Size       : 1500
```

```
Extended 802.1 TLV Info
```

```
-Port VLAN Id             : 1
```

```
-Port & Protocol VLAN Id
```

Protocol VLAN Id	Support	Protocol VLAN Status	TxStatus
0	Supported	Enabled	Disabled

-Vlan Name

Vlan Id	Vlan Name	TxStatus
-----	-----	-----
1		Disabled

-Link Aggregation

Capability & Status : Not Capable, Not In Aggregation  
 Aggregated Port Id : 0

-VID TLV:

VID	TxStatus
-----	-----
1dcdf777	Enabled

-Management Vid TLV:

Vlan Id	TxStatus
-----	-----
1	Enabled

LLDP-MED Admin Status : Disabled

-LLDP-MED Capability TLV

LLDP-MED Tx Supported : MedCapability, NetworkPolicy,  
 LocationIdentity,  
 Ex-PowerViaMDI-PSE, Inventory  
**LLDP-MED Tx Enabled :Inventory**

-LLDP-MED Network Policy TLV

Application Type :  
 Unknown Policy Flag :  
 VlanType :  
 VlanID :  
 Priority :  
 Dscp :

-LLDP-MED Location TLV Info

Location Subtype :  
 Location Info :

```
-LLDP-MED Ex-PowerViaMDI TLV Info
Power Priority           : Critical
Power Value             : 1000
-----
```

3. View the information about neighbors learnt on a particular interface by executing the following command;

FOR EXAMPLE: Type the following

```
iS5comm# show lldp neighbors detail
```

Capability Codes:

(R) Router, (B) Bridge, (T) Telephone, (C) DOCSIS Cable Device,  
(W) WLAN Access Point, (P) Repeater, (S) Station, (O) Other

```
Chassis Id SubType      : Mac Address
Chassis Id              : e8:e8:75:90:0b:01
Port Id SubType         : Interface Alias
Port Id                 : Gi0/1
Port Description        : Not Advertised
System Name             : Not Advertised
System Desc             : Not Advertised
Local Intf              : Gi0/1
Time Remaining          : 104 Seconds
System Capabilities Tlv : Not Advertised
Management Address      : Not Advertised
```

Extended 802.3 TLV Info

-MAC PHY Configuration & Status

```
Auto Negotiation Tlv    : Not Advertised
```

-Link Aggregation

```
Link Aggregation Tlv    : Not Advertised
```

```
-Maximum Frame Size Tlv : Not Advertised
```

Extended 802.1 TLV Info

```
-Port VLAN Tlv          : Not Advertised
```

-Port & Protocol VLAN Id

```
Protocol Vlan Tlv       : Not Advertised
```

-Vlan Name

```
Vlan Name Tlv           : Not Advertised
```

**-VID TLV:0**

```
-Management Vid TLV     :0
```

-LLDP MED Capability TLV

```
Capabilities Supported   : MedCapability, NetworkPolicy, Inventory
```

```

Capabilities Enabled      : NetworkPolicy
Device Class              : Endpoint Class III

-LLDP MED Inventory TLV  : Not Advertised
Hardware Revision         : 0
Firmware Revision        : 0
Software Revision        : 0
Serial Number             : 0

```

## Enabling LLDP-MED Network Policy TLV for Destination MAC Address

CONTEXT:

### At Switch A:

Configure the *LLDP* module status as enabled. Refer to section “Enabling LLDP” for configuring *LLDP* module status.

1. Enable *LLDP-MED* Network TLV for specific destination mac-address by executing the following commands

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Configure destination mac-address and Enable *LLDP-MED* Network policy TLV for that specific destination mac-address on port P1.

```
iS5comm(config)# interface gigabitethernet 0/1
```

```
iS5comm(config-if)# lldp med-tlv-select network-policy mac-address
00:02:04:05:06:07
```

```
iS5comm(config-if)# end
```

2. View the local system information by executing the following command.

FOR EXAMPLE: Type the following:

```
iS5comm# show lldp local gigabitethernet 0/1 mac-address 00:02:04:05:06:07
```

```
Port Id SubType          : Interface Alias
```

```
Port Id                  : Gi0/1
```

```
Port Description         : Ethernet Interface Port 01
```

```
Enabled Tx Tlvs          : Port Description, System Name,
```

```
System Description, System Capability,
```

```
Management Address
```

```
Extended 802.3 TLV Info
```

```
-MAC PHY Configuration & Status
```

```
Auto-Neg Support & Status : ,
```

```
Advertised Capability Bits : 0000
```



```

Operational MAU Type           : 0
-Maximum Frame Size           : 1500

Extended 802.1 TLV Info
-Port VLAN Id                  : 1
-Port & Protocol VLAN Id

Protocol VLAN Id      Support      Protocol VLAN Status      TxStatus
-----
0                     Supported    Enabled                    Disabled

-Vlan Name
Vlan Id      Vlan Name      TxStatus
-----
1                        Disabled

-Link Aggregation
Capability & Status      : Not Capable, Not In Aggregation
Aggregated Port Id      : 0

-VID TLV:
VID      TxStatus
-----
1dcdf777 Enabled

-Management Vid TLV:
Vlan Id      TxStatus
-----
1            Enabled

LLDP-MED Admin Status      : Disabled

-LLDP-MED Capability TLV
LLDP-MED Tx Supported      : MedCapability, NetworkPolicy,
LocationIdentity,
Ex-PowerViaMDI-PSE, Inventory
LLDP-MED Tx Enabled :NetworkPolicy

-LLDP-MED Network Policy TLV
Application Type           :
Unknown Policy Flag       :
```

```

VlanType          :
VlanID            :
Priority           :
Dscp              :

-LLDP-MED Location TLV Info
Location Subtype   :
Location Info      :

-LLDP-MED Ex-PowerViaMDI TLV Info
Power Priority      : Critical
Power Value        : 1000
-----

```

## Disabling Inventory Management TLV

CONTEXT:

### At Switch A:

Configure the *LLDP* module status as enabled. Refer to section “Enabling LLDP” for configuring *LLDP* module status.

### CLI Configuration

1. Disable *LLDP-MED* Inventory management *TLV* by executing the following commands;

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Disable *LLDP-MED* Inventory management *TLV* on port P1.

```
iS5comm(config)# interface gigabitethernet 0/1
```

```
iS5comm(config-if)# no lldp med-tlv-select inventory-management
```

```
iS5comm(config-if)# end
```

2. View the local system information by executing the following command

FOR EXAMPLE: Type the following:

```
iS5comm# show lldp local gigabitethernet 0/1
```

```
Port Id SubType          : Interface Alias
```

```
Port Id                  : Gi0/1
```

```
Port Description         : Ethernet Interface Port 01
```

```
Enabled Tx Tlvs          : Port Description, System Name,
```

```
System Description, System Capability,
```

```
Management Address
```

## Extended 802.3 TLV Info

## -MAC PHY Configuration &amp; Status

Auto-Neg Support & Status : ,  
 Advertised Capability Bits : 0000  
 Operational MAU Type : 0  
 -Maximum Frame Size : 1500

## Extended 802.1 TLV Info

-Port VLAN Id : 1

## -Port &amp; Protocol VLAN Id

Protocol VLAN Id	Support	Protocol VLAN Status	TxStatus
-----	-----	-----	-----
0	Supported	Enabled	Disabled

## -Vlan Name

Vlan Id	Vlan Name	TxStatus
-----	-----	-----
1		Disabled

## -Link Aggregation

Capability & Status : Not Capable, Not In Aggregation  
 Aggregated Port Id : 0

## -VID TLV:

VID	TxStatus
-----	-----
1dcdf777	Enabled

## -Management Vid TLV:

Vlan Id	TxStatus
-----	-----
1	Enabled

LLDP-MED Admin Status : Disabled

## -LLDP-MED Capability TLV

LLDP-MED Tx Supported : MedCapability, NetworkPolicy,  
 LocationIdentity,  
 Ex-PowerViaMDI-PSE, Inventory

LLDP-MED Tx Enabled :

-LLDP-MED Network Policy TLV

```
Application Type      :
Unknown Policy Flag   :
VlanType              :
VlanID                :
Priority              :
Dscp                  :
```

-LLDP-MED Location TLV Info

```
Location Subtype      :
Location Info         :
```

-LLDP-MED Ex-PowerViaMDI TLV Info

```
Power Priority         : Critical
Power Value           : 1000
```

-----

3. View the information about neighbors learnt on a particular interface by executing the following command;

FOR EXAMPLE: Type the following

```
iS5comm# show lldp neighbors detail
```

Capability Codes:

(R) Router, (B) Bridge, (T) Telephone, (C) DOCSIS Cable Device,  
(W) WLAN Access Point, (P) Repeater, (S) Station, (O) Other

```
Chassis Id SubType    : Mac Address
Chassis Id            : e8:e8:75:90:0b:01
Port Id SubType       : Interface Alias
Port Id               : Gi0/1
Port Description      : Not Advertised
System Name           : Not Advertised
System Desc           : Not Advertised
Local Intf            : Gi0/1
Time Remaining        : 104 Seconds
System Capabilities Tlv : Not Advertised
Management Address    : Not Advertised
```

Extended 802.3 TLV Info

-MAC PHY Configuration & Status

```

Auto Negotiation Tlv           : Not Advertised
-Link Aggregation
Link Aggregation Tlv           : Not Advertised
-Maximum Frame Size Tlv        : Not Advertised
Extended 802.1 TLV Info
-Port VLAN Tlv                 : Not Advertised
-Port & Protocol VLAN Id
Protocol Vlan Tlv              : Not Advertised
-Vlan Name
Vlan Name Tlv                  : Not Advertised
-VID TLV:0
-Management Vid TLV            :0
-LLDP MED Capability TLV
Capabilities Supported           : MedCapability, NetworkPolicy, Inventory
Capabilities Enabled            : NetworkPolicy
Device Class                    : Endpoint Class III

-LLDP MED Inventory TLV        : Not Advertised
Hardware Revision               : 0
Firmware Revision               : 0
Software Revision               : 0
Serial Number                   : 0

```

## Disabling LLDP-MED Inventory Management TLV for Destination MAC Address

CONTEXT:

### At Switch A:

Configure the *LLDP* module status as enabled. Refer to section “Enabling LLDP” for configuring *LLDP* module status.

1. Disabling *LLDP-MED* Inventory Management *TLV* for specific destination mac-address by executing the following commands

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Disable *LLDP-MED* Inventory *TLV* for that specific destination mac-address on port P1.

```
iS5comm(config)# interface gigabitethernet 0/1
```

```
iS5comm(config-if)# no lldp med-tlv-select inventory-management
mac-address 00:02:04:05:06:07
```

```
iS5comm(config-if)# end
```

## 2. View the local system information by executing the following command.

FOR EXAMPLE: Type the following:

iS5comm# show lldp local gigabitethernet 0/1 mac-address 00:02:04:05:06:07

```

Port Id SubType          : Interface Alias
Port Id                  : Gi0/1
Port Description         : Ethernet Interface Port 01
Enabled Tx Tlvs          : Port Description, System Name,
System Description, System Capability,
Management Address

```

Extended 802.3 TLV Info

-MAC PHY Configuration &amp; Status

```

Auto-Neg Support & Status : ,
Advertised Capability Bits : 0000
Operational MAU Type      : 0
-Maximum Frame Size       : 1500

```

Extended 802.1 TLV Info

-Port VLAN Id : 1

-Port &amp; Protocol VLAN Id

Protocol VLAN Id	Support	Protocol VLAN Status	TxStatus
0	Supported	Enabled	Disabled

-Vlan Name

Vlan Id	Vlan Name	TxStatus
1		Disabled

-Link Aggregation

```

Capability & Status : Not Capable, Not In Aggregation
Aggregated Port Id : 0

```

-VID TLV:

VID	TxStatus
1dcdf777	Enabled

-Management Vid TLV:

Vlan Id	TxStatus
---------	----------

```

-----
1              Enabled

LLDP-MED Admin Status          : Disabled

-LLDP-MED Capability TLV
LLDP-MED Tx Supported          : MedCapability, NetworkPolicy,
LocationIdentity,
Ex-PowerViaMDI-PSE, Inventory
LLDP-MED Tx Enabled :

-LLDP-MED Network Policy TLV
Application Type                :
Unknown Policy Flag             :
VlanType                        :
VlanID                          :
Priority                        :
Dscp                            :

-LLDP-MED Location TLV Info
Location Subtype                :
Location Info                   :

-LLDP-MED Ex-PowerViaMDI TLV Info
Power Priority                   : Critical
Power Value                     : 1000
-----

```

## Enabling Location Identification TLV

CONTEXT:

### At Switch A:

Configure the *LLDP* module status as enabled. Refer to section “Enabling LLDP” for configuring *LLDP* module status.

### CLI Configuration

1. Enable *LLDP-MED* Location Identification *TLV* by executing the following commands;

FOR EXAMPLE: Type the following:

– Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Enable *LLDP-MED* Location Identification TLV on port P1.

```
iS5comm(config)# interface gigabitethernet 0/1
iS5comm(config-if)# lldp med-tlv-select location-id
iS5comm(config-if)# end
```

## 2. View the local system information by executing the following command

FOR EXAMPLE: Type the following:

```
iS5comm# show lldp local gigabitethernet 0/1
Port Id SubType           : Interface Alias
Port Id                   : Gi0/1
Port Description          : Ethernet Interface Port 01
Enabled Tx Tlvs           : Port Description, System Name,
System Description, System Capability,
Management Address

Extended 802.3 TLV Info
-MAC PHY Configuration & Status
Auto-Neg Support & Status : ,
Advertised Capability Bits : 0000
Operational MAU Type      : 0
-Maximum Frame Size       : 1500

Extended 802.1 TLV Info
-Port VLAN Id             : 1
-Port & Protocol VLAN Id

Protocol VLAN Id      Support      Protocol VLAN Status      TxStatus
-----
0                     Supported   Enabled                    Disabled

-Vlan Name
Vlan Id              Vlan Name                      TxStatus
-----
1                     Disabled

-Link Aggregation
Capability & Status    : Not Capable, Not In Aggregation
Aggregated Port Id    : 0

-VID TLV:
VID                  TxStatus
-----
```



```
1dcdf777      Enabled
```

**-Management Vid TLV:**

```
Vlan Id      TxStatus
-----      -
1            Enabled
```

```
LLDP-MED Admin Status      : Disabled
```

**-LLDP-MED Capability TLV**

```
LLDP-MED Tx Supported      : MedCapability, NetworkPolicy,
LocationIdentity,
Ex-PowerViaMDI-PSE, Inventory
```

**LLDP-MED Tx Enabled :LocationIdentity**

**-LLDP-MED Network Policy TLV**

```
Application Type      :
Unknown Policy Flag   :
VlanType              :
VlanID                :
Priority              :
Dscp                  :
```

**-LLDP-MED Location TLV Info**

```
Location Subtype      :
Location Info         :
```

**-LLDP-MED Ex-PowerViaMDI TLV Info**

```
Power Priority        : Critical
Power Value           : 1000
```

```
-----
```

3. View the information about neighbors learnt on a particular interface by executing the following command;

FOR EXAMPLE: Type the following

```
iS5comm# show lldp neighbors detail
```

Capability Codes:

```
(R) Router, (B) Bridge, (T) Telephone, (C) DOCSIS Cable Device,
(W) WLAN Access Point, (P) Repeater, (S) Station, (O) Other
```

```
Chassis Id SubType      : Mac Address
```

```

Chassis Id           : e8:e8:75:90:0b:01
Port Id SubType      : Interface Alias
Port Id              : Gi0/1
Port Description     : Not Advertised
System Name          : Not Advertised
System Desc          : Not Advertised
Local Intf           : Gi0/1
Time Remaining       : 104 Seconds
System Capabilities Tlv : Not Advertised
Management Address   : Not Advertised

```

#### Extended 802.3 TLV Info

##### -MAC PHY Configuration & Status

```
Auto Negotiation Tlv      : Not Advertised
```

##### -Link Aggregation

```
Link Aggregation Tlv      : Not Advertised
```

```
-Maximum Frame Size Tlv   : Not Advertised
```

#### Extended 802.1 TLV Info

```
-Port VLAN Tlv           : Not Advertised
```

##### -Port & Protocol VLAN Id

```
Protocol Vlan Tlv        : Not Advertised
```

##### -Vlan Name

```
Vlan Name Tlv            : Not Advertised
```

#### **-VID TLV:0**

```
-Management Vid TLV      :0
```

##### -LLDP MED Capability TLV

```
Capabilities Supported    : MedCapability, NetworkPolicy, Inventory
```

```
Capabilities Enabled      : LocationIdentity
```

```
Device Class              : Endpoint Class III
```

```
-LLDP MED Inventory TLV   : Not Advertised
```

```
Hardware Revision         : 0
```

```
Firmware Revision        : 0
```

```
Software Revision         : 0
```

```
Serial Number             : 0
```

## Enabling Location Identification TLV for Destination MAC Address

CONTEXT:

**At Switch A:**

Configure the *LLDP* module status as enabled. Refer to section “Enabling LLDP” for configuring *LLDP* module status.

1. Enable *LLDP-MED* Location Identification *TLV* for specific destination mac-address by executing the following commands;

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Configure destination mac-address and enable *LLDP-MED* Location Identification *TLV* for that specific destination mac-address on port P1.

```
iS5comm(config)# interface gigabitethernet 0/1
```

```
iS5comm(config-if)# lldp dest-mac 00:02:04:05:06:07
```

```
iS5comm(config-if)# lldp med-tlv-select location-id mac-address  
00:02:04:05:06:07
```

```
iS5comm(config-if)# end
```

2. View the local system information by executing the following command

FOR EXAMPLE: Type the following:

```
iS5comm# show lldp local gigabitethernet 0/1 mac-address  
00:02:04:05:06:07
```

```
Port Id SubType          : Interface Alias
```

```
Port Id                  : Gi0/1
```

```
Port Description         : Ethernet Interface Port 01
```

```
Enabled Tx Tlvs          : Port Description, System Name,  
System Description, System Capability,  
Management Address
```

```
Extended 802.3 TLV Info
```

```
-MAC PHY Configuration & Status
```

```
Auto-Neg Support & Status : ,
```

```
Advertised Capability Bits : 0000
```

```
Operational MAU Type      : 0
```

```
-Maximum Frame Size       : 1500
```

```
Extended 802.1 TLV Info
```

```
-Port VLAN Id             : 1
```

```
-Port & Protocol VLAN Id
```

Protocol VLAN Id	Support	Protocol VLAN Status	TxStatus
0	Supported	Enabled	Disabled

```
-Vlan Name
```

---

Vlan Id	Vlan Name	TxStatus
-----	-----	-----
1		Disabled

-Link Aggregation  
 Capability & Status : Not Capable, Not In Aggregation  
 Aggregated Port Id : 0

-VID TLV:

VID	TxStatus
-----	-----
1dcdf777	Enabled

-Management Vid TLV:

Vlan Id	TxStatus
-----	-----
1	Enabled

LLDP-MED Admin Status : Disabled

-LLDP-MED Capability TLV  
 LLDP-MED Tx Supported : MedCapability, NetworkPolicy,  
 LocationIdentity,  
 Ex-PowerViaMDI-PSE, Inventory  
 LLDP-MED Tx Enabled :LocationIdentity

-LLDP-MED Network Policy TLV  
 Application Type :  
 Unknown Policy Flag :  
 VlanType :  
 VlanID :  
 Priority :  
 Dscp :

-LLDP-MED Location TLV Info  
 Location Subtype :  
 Location Info :

-LLDP-MED Ex-PowerViaMDI TLV Info  
 Power Priority : Critical

---

```
Power Value                : 1000
```

---

## Disabling Location Identification TLV

CONTEXT:

### At Switch A:

Configure the *LLDP* module status as enabled. Refer to section “Enabling LLDP” for configuring *LLDP* module status.

1. Disable *LLDP-MED* Location Identification TLV by executing the following commands.

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Disable *LLDP-MED* Location Identification TLV on port P1.

```
iS5comm(config)# interface gigabitethernet 0/1
```

```
iS5comm(config-if)# no lldp med-tlv-select location-id
```

```
iS5comm(config-if)# end
```

2. View the local system information by executing the following command

FOR EXAMPLE: Type the following:

```
iS5comm# show lldp local gigabitethernet 0/1
```

```
Port Id SubType                : Interface Alias
```

```
Port Id                        : Gi0/1
```

```
Port Description                : Ethernet Interface Port 01
```

```
Enabled Tx Tlvs                 : Port Description, System Name,
```

```
System Description, System Capability,
```

```
Management Address
```

```
Extended 802.3 TLV Info
```

```
-MAC PHY Configuration & Status
```

```
Auto-Neg Support & Status      : ,
```

```
Advertised Capability Bits     : 0000
```

```
Operational MAU Type           : 0
```

```
-Maximum Frame Size            : 1500
```

```
Extended 802.1 TLV Info
```

```
-Port VLAN Id                  : 1
```

```
-Port & Protocol VLAN Id
```

Protocol VLAN Id	Support	Protocol VLAN Status	TxStatus
------------------	---------	----------------------	----------

-----	-----	-----	-----
-------	-------	-------	-------

---

0	Supported	Enabled	Disabled
---	-----------	---------	----------

**-Vlan Name**

Vlan Id	Vlan Name	TxStatus
-----	-----	-----
1		Disabled

**-Link Aggregation**

Capability & Status	: Not Capable, Not In Aggregation
Aggregated Port Id	: 0

**-VID TLV:**

VID	TxStatus
-----	-----
<b>1dcdf777</b>	<b>Enabled</b>

**-Management Vid TLV:**

Vlan Id	TxStatus
-----	-----
1	Enabled

LLDP-MED Admin Status	: Disabled
-----------------------	------------

**-LLDP-MED Capability TLV**

LLDP-MED Tx Supported	: MedCapability, NetworkPolicy,
LocationIdentity,	
Ex-PowerViaMDI-PSE, Inventory	
LLDP-MED Tx Enabled :	

**-LLDP-MED Network Policy TLV**

Application Type	:
Unknown Policy Flag	:
VlanType	:
VlanID	:
Priority	:
Dscp	:

**-LLDP-MED Location TLV Info**

Location Subtype	:
Location Info	:

```
-LLDP-MED Ex-PowerViaMDI TLV Info
Power Priority           : Critical
Power Value             : 1000
-----
```

## Disabling Location Identification TLV for Destination MAC Address

CONTEXT:

### At Switch A:

Configure the *LLDP* module status as enabled. Refer to section “Enabling LLDP” for configuring *LLDP* module status.

1. Disable *LLDP-MED* Location Identification *TLV* for specific destination mac-address by executing the following commands;

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Disable *LLDP-MED* Location Identification *TLV* for that specific destination mac-address on port P1.

```
iS5comm(config)# interface gigabitethernet 0/1
```

```
iS5comm(config-if)# no lldp med-tlv-select location-id mac-address
00:02:04:05:06:07
```

```
iS5comm(config-if)# end
```

2. View the local system information by executing the following command

FOR EXAMPLE: Type the following:

```
iS5comm# show lldp local gigabitethernet 0/1 mac-address
00:02:04:05:06:07
```

```
Port Id SubType           : Interface Alias
```

```
Port Id                   : Gi0/1
```

```
Port Description          : Ethernet Interface Port 01
```

```
Enabled Tx Tlvs           : Port Description, System Name,
```

```
System Description, System Capability,
```

```
Management Address
```

```
Extended 802.3 TLV Info
```

```
-MAC PHY Configuration & Status
```

```
Auto-Neg Support & Status : ,
```

```
Advertised Capability Bits : 0000
```

```
Operational MAU Type      : 0
```

```
-Maximum Frame Size       : 1500
```

## Extended 802.1 TLV Info

-Port VLAN Id : 1

-Port &amp; Protocol VLAN Id

Protocol VLAN Id	Support	Protocol VLAN Status	TxStatus
-----	-----	-----	-----
0	Supported	Enabled	Disabled

-Vlan Name

Vlan Id	Vlan Name	TxStatus
-----	-----	-----
1		Disabled

-Link Aggregation

Capability &amp; Status : Not Capable, Not In Aggregation

Aggregated Port Id : 0

-VID TLV:

VID	TxStatus
-----	-----
1dcdf777	Enabled

-Management Vid TLV:

Vlan Id	TxStatus
-----	-----
1	Enabled

LLDP-MED Admin Status : Disabled

-LLDP-MED Capability TLV

LLDP-MED Tx Supported : MedCapability, NetworkPolicy,  
LocationIdentity,  
Ex-PowerViaMDI-PSE, Inventory  
LLDP-MED Tx Enabled :

-LLDP-MED Network Policy TLV

Application Type :  
Unknown Policy Flag :  
VlanType :  
VlanID :



```

Priority                               :
Dscp                                   :

-LLDP-MED Location TLV Info
Location Subtype                       :
Location Info                         :

-LLDP-MED Ex-PowerViaMDI TLV Info
Power Priority                         : Critical
Power Value                           : 1000
-----

```

## Enabling Extended Power-Via-MDI TLV

CONTEXT:

### At Switch A:

Configure the *LLDP* module status as enabled. Refer to section “Enabling LLDP” for configuring *LLDP* module status.

### CLI Configuration

1. Enable Extended Power-Via-MDI *TLV* by executing the following commands;

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Enable Extended Power-Via-MDI *TLV* on port P1.

```
iS5comm(config)# interface gigabitethernet 0/1
```

```
iS5comm(config-if)# lldp med-tlv-select ex-power-via-mdi
```

```
iS5comm(config-if)# end
```

2. View the local system information by executing the following command

FOR EXAMPLE: Type the following:

```
iS5comm# show lldp local gigabitethernet 0/1
```

```
Port Id SubType                : Interface Alias
```

```
Port Id                        : Gi0/1
```

```
Port Description               : Ethernet Interface Port 01
```

```
Enabled Tx Tlvs                : Port Description, System Name,
```

```
System Description, System Capability,
```

```
Management Address
```

```
Extended 802.3 TLV Info
```

**-MAC PHY Configuration & Status**

```

Auto-Neg Support & Status      : ,
Advertised Capability Bits     : 0000
Operational MAU Type           : 0
-Maximum Frame Size            : 1500

```

**Extended 802.1 TLV Info**

```

-Port VLAN Id                  : 1
-Port & Protocol VLAN Id
Protocol VLAN Id      Support  Protocol VLAN Status  TxStatus
-----
0                     Supported Enabled              Disabled

```

**-Vlan Name**

```

Vlan Id      Vlan Name      TxStatus
-----
1            Disabled

```

**-Link Aggregation**

```

Capability & Status          : Not Capable, Not In Aggregation
Aggregated Port Id          : 0

```

**-VID TLV:**

```

VID      TxStatus
-----
1dcdf777 Enabled

```

**-Management Vid TLV:**

```

Vlan Id      TxStatus
-----
1            Enabled

```

```

LLDP-MED Admin Status      : Disabled

```

**-LLDP-MED Capability TLV**

```

LLDP-MED Tx Supported      : MedCapability, NetworkPolicy,
LocationIdentity,
Ex-PowerViaMDI-PSE, Inventory

```

```

LLDP-MED Tx Enabled :Ex-PowerViaMDI-PSE

```

```

-LLDP-MED Network Policy TLV
Application Type           :
Unknown Policy Flag       :
VlanType                   :
VlanID                     :
Priority                   :
Dscp                       :

-LLDP-MED Location TLV Info
Location Subtype          :
Location Info             :

-LLDP-MED Ex-PowerViaMDI TLV Info
Power Priority             : Critical
Power Value               : 1000
-----

```

3. View the information about neighbors learnt on a particular interface by executing the following command;

FOR EXAMPLE: Type the following

```
is5comm# show lldp neighbors gigabitethernet 0/1 detail
```

Capability Codes:

(R) Router, (B) Bridge, (T) Telephone, (C) DOCSIS Cable Device,  
(W) WLAN Access Point, (P) Repeater, (S) Station, (O) Other

```

Chassis Id SubType        : Mac Address
Chassis Id                : e8:e8:75:90:0b:01
Port Id SubType           : Interface Alias
Port Id                   : Gi0/1
Port Description          : Not Advertised
System Name               : Not Advertised
System Desc               : Not Advertised
Local Intf                : Gi0/1
Time Remaining            : 104 Seconds
System Capabilities Tlv   : Not Advertised
Management Address        : Not Advertised

```

Extended 802.3 TLV Info

-MAC PHY Configuration & Status

```
Auto Negotiation Tlv      : Not Advertised
```

-Link Aggregation

```

Link Aggregation Tlv           : Not Advertised
-Maximum Frame Size Tlv       : Not Advertised
Extended 802.1 TLV Info
-Port VLAN Tlv                : Not Advertised
-Port & Protocol VLAN Id
Protocol Vlan Tlv              : Not Advertised
-Vlan Name
Vlan Name Tlv                  : Not Advertised
-VID TLV:0
-Management Vid TLV           :0
-LLDP MED Capability TLV
Capabilities Supported          : MedCapability, NetworkPolicy, Inventory
Capabilities Enabled            : Ex-PowerViaMDI-PSE
Device Class                    : Endpoint Class III

-LLDP MED Inventory TLV       : Not Advertised
Hardware Revision              : 0
Firmware Revision              : 0
Software Revision              : 0
Serial Number                   : 0

```

## Enabling Extended Power-Via-MDI TLV for Destination MAC Address

CONTEXT:

### At Switch A:

Configure the *LLDP* module status as enabled. Refer to section “Enabling LLDP” for configuring *LLDP* module status.

1. Enable Extended Power-Via-MDI *TLV* for specific destination mac-address by executing the following commands;

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Configure destination mac-address and enable *LLDP-MED* Extended Power-Via-MDI *TLV* for that specific destination mac-address on port P1.

```
iS5comm(config)# interface gigabitethernet 0/1
```

```
iS5comm(config-if)# lldp dest-mac 00:02:04:05:06:07
```

```
iS5comm(config-if)# lldp med-tlv-select ex-power-via-mdi mac-address
00:02:04:05:06:07
```

```
iS5comm(config-if)# end
```

## 2. View the local system information by executing the following command

FOR EXAMPLE: Type the following:

```
iS5comm# show lldp local gigabitethernet 0/1 mac-address
00:02:04:05:06:07
```

```
Port Id SubType          : Interface Alias
Port Id                  : Gi0/1
Port Description         : Ethernet Interface Port 01
Enabled Tx Tlvs          : Port Description, System Name,
System Description, System Capability,
Management Address
```

Extended 802.3 TLV Info

-MAC PHY Configuration &amp; Status

```
Auto-Neg Support & Status : ,
Advertised Capability Bits : 0000
Operational MAU Type      : 0
-Maximum Frame Size      : 1500
```

Extended 802.1 TLV Info

-Port VLAN Id : 1

-Port &amp; Protocol VLAN Id

Protocol VLAN Id	Support	Protocol VLAN Status	TxStatus
0	Supported	Enabled	Disabled

-Vlan Name

Vlan Id	Vlan Name	TxStatus
1		Disabled

-Link Aggregation

```
Capability & Status : Not Capable, Not In Aggregation
Aggregated Port Id : 0
```

-VID TLV:

VID	TxStatus
1dcdf777	Enabled

-Management Vid TLV:

```

Vlan Id      TxStatus
-----
1            Enabled

LLDP-MED Admin Status      : Disabled

-LLDP-MED Capability TLV
LLDP-MED Tx Supported      : MedCapability, NetworkPolicy,
LocationIdentity,
Ex-PowerViaMDI-PSE, Inventory
LLDP-MED Tx Enabled :Ex-PowerViaMDI-PSE

-LLDP-MED Network Policy TLV
Application Type           :
Unknown Policy Flag        :
VlanType                   :
VlanID                     :
Priority                   :
Dscp                       :

-LLDP-MED Location TLV Info
Location Subtype           :
Location Info              :

-LLDP-MED Ex-PowerViaMDI TLV Info
Power Priority              : Critical
Power Value                : 1000
-----

```

## Disabling Extended Power-Via-MDI TLV

CONTEXT:

### At Switch A:

Configure the *LLDP* module status as enabled. Refer to section “Enabling LLDP” for configuring *LLDP* module status.

1. Disable *LLDP-MED* Extended Power-Via-MDI *TLV* by executing the following commands.

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.
- ```
iS5comm# configure terminal
```
- Disable *LLDP-MED* Location Identification *TLV* on port P1.

```
iS5comm(config)# interface gigabitethernet 0/1
iS5comm(config-if)# no lldp med-tlv-select ex-power-via-mdi
iS5comm(config-if)# end
```

## 2. View the local system information by executing the following command.

FOR EXAMPLE: Type the following:

```
iS5comm# show lldp local gigabitethernet 0/1
Port Id SubType           : Interface Alias
Port Id                   : Gi0/1
Port Description          : Ethernet Interface Port 01
Enabled Tx Tlvs           : Port Description, System Name,
System Description, System Capability,
Management Address

Extended 802.3 TLV Info
-MAC PHY Configuration & Status
Auto-Neg Support & Status : ,
Advertised Capability Bits : 0000
Operational MAU Type      : 0
-Maximum Frame Size       : 1500

Extended 802.1 TLV Info
-Port VLAN Id             : 1
-Port & Protocol VLAN Id

Protocol VLAN Id      Support      Protocol VLAN Status      TxStatus
-----
0                     Supported   Enabled                    Disabled

-Vlan Name
Vlan Id              Vlan Name                      TxStatus
-----
1                     Disabled

-Link Aggregation
Capability & Status    : Not Capable, Not In Aggregation
Aggregated Port Id     : 0

-VID TLV:
VID                  TxStatus
-----
1dcdf777            Enabled
```

```

-Management id TLV:
Vlan Id      TxStatus
-----      -
1            Enabled

LLDP-MED Admin Status      : Disabled

-LLDP-MED Capability TLV
LLDP-MED Tx Supported      : MedCapability, NetworkPolicy,
LocationIdentity,
Ex-PowerViaMDI-PSE, Inventory
LLDP-MED Tx Enabled :

-LLDP-MED Network Policy TLV
Application Type           :
Unknown Policy Flag        :
VlanType                   :
VlanID                     :
Priority                   :
Dscp                       :

-LLDP-MED Location TLV Info
Location Subtype           :
Location Info              :

-LLDP-MED Ex-PowerViaMDI TLV Info
Power Priority              : Critical
Power Value                 : 1000
-----

```

## Disabling Extended Power-Via-MDI TLV for Destination MAC Address

CONTEXT:

### At Switch A:

Configure the *LLDP* module status as enabled. Refer to section “Enabling LLDP” for configuring *LLDP* module status.

1. Disable Extended Power-Via-MDI *TLV* for specific destination mac-address by executing the following commands;

FOR EXAMPLE: Type the following:



- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Configure destination mac-address and Enable *LLDP-MED* Extended Power-Via-MDI TLV for that specific destination mac-address on port P1.

```
iS5comm(config)# interface gigabitethernet 0/1
```

```
iS5comm(config-if)# no lldp med-tlv-select ex-power-via-mdi mac-address  
00:02:04:05:06:07
```

```
iS5comm(config-if)# end
```

## 2. View the local system information by executing the following command

FOR EXAMPLE: Type the following:

```
iS5comm# show lldp local gigabitethernet 0/1 mac-address  
00:02:04:05:06:07
```

```
Port Id SubType           : Interface Alias  
Port Id                   : Gi0/1  
Port Description          : Ethernet Interface Port 01  
Enabled Tx Tlvs           : Port Description, System Name,  
System Description, System Capability,  
Management Address
```

Extended 802.3 TLV Info

-MAC PHY Configuration & Status

```
Auto-Neg Support & Status : ,  
Advertised Capability Bits : 0000  
Operational MAU Type      : 0  
-Maximum Frame Size       : 1500
```

Extended 802.1 TLV Info

-Port VLAN Id : 1

-Port & Protocol VLAN Id

| Protocol VLAN Id | Support   | Protocol VLAN Status | TxStatus |
|------------------|-----------|----------------------|----------|
| 0                | Supported | Enabled              | Disabled |

-Vlan Name

| Vlan Id | Vlan Name | TxStatus |
|---------|-----------|----------|
| 1       |           | Disabled |

-Link Aggregation

Capability & Status : Not Capable, Not In Aggregation

Aggregated Port Id : 0

-VID TLV:

| VID      | TxStatus |
|----------|----------|
| -----    | -----    |
| 1dcdf777 | Enabled  |

-Management Vid TLV:

| Vlan Id | TxStatus |
|---------|----------|
| -----   | -----    |
| 1       | Enabled  |

LLDP-MED Admin Status : Disabled

-LLDP-MED Capability TLV

LLDP-MED Tx Supported : MedCapability, NetworkPolicy,  
LocationIdentity,  
Ex-PowerViaMDI-PSE, Inventory

**LLDP-MED Tx Enabled :**

-LLDP-MED Network Policy TLV

|                     |   |
|---------------------|---|
| Application Type    | : |
| Unknown Policy Flag | : |
| VlanType            | : |
| VlanID              | : |
| Priority            | : |
| Dscp                | : |

-LLDP-MED Location TLV Info

|                  |   |
|------------------|---|
| Location Subtype | : |
| Location Info    | : |

-LLDP-MED Ex-PowerViaMDI TLV Info

|                |            |
|----------------|------------|
| Power Priority | : Critical |
| Power Value    | : 1000     |

-----

## 4.2. Configuring Location Identification Information—Elin Location subtype

This section describes the configuration of *LLDP-MED* Location Identification *TLV* information—Elin Location subtype.

### Enabling of Elin Location Subtype

CONTEXT:

#### At Switch A:

Configure the *LLDP* module status as enabled. Refer to section “Enabling LLDP” for configuring *LLDP* module status.

#### CLI Configuration

1. Enable *LLDP-MED* Location Identification *TLV* and configure Elin Location subtype by executing the following commands.

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Enable Location Identification *TLV* and configure Elin Location subtype on port P1.

```
iS5comm(config)# interface gigabitethernet 0/1
```

```
iS5comm(config-if)# lldp med-tlv-select med-capability
```

```
iS5comm(config-if)# lldp med-tlv-select location-id
```

```
iS5comm(config-if)# lldp med-location elin-location location-id  
36789231367
```

```
iS5comm(config-if)# end
```

2. View the local system information by executing the following command

FOR EXAMPLE: Type the following:

```
iS5comm# show lldp local gigabitethernet 0/1
```

```
Port Id SubType           : Interface Alias
```

```
Port Id                   : Gi0/1
```

```
Port Description          : Ethernet Interface Port 01
```

```
Enabled Tx Tlvs           : Port Description, System Name,
```

```
System Description, System Capability,
```

```
Management Address
```

```
Extended 802.3 TLV Info
```

```
-MAC PHY Configuration & Status
```

```
Auto-Neg Support & Status : ,
```

```

Advertised Capability Bits      : 0000
Operational MAU Type           : 0
-Maximum Frame Size            : 1500

Extended 802.1 TLV Info
-Port VLAN Id                  : 1
-Port & Protocol VLAN Id
Protocol VLAN Id      Support      Protocol VLAN Status      TxStatus
-----
0                      Supported    Enabled                  Disabled

-Vlan Name
Vlan Id      Vlan Name      TxStatus
-----
1                      Disabled

-Link Aggregation
Capability & Status      : Not Capable, Not In Aggregation
Aggregated Port Id       : 0

-VID TLV:
VID      TxStatus
-----
1dcdf777 Enabled

-Management Vid TLV:
Vlan Id      TxStatus
-----
1            Enabled

LLDP-MED Admin Status      : Disabled

-LLDP-MED Capability TLV
LLDP-MED Tx Supported      : MedCapability, NetworkPolicy,
LocationIdentity,
Ex-PowerViaMDI-PSE, Inventory
LLDP-MED Tx Enabled : MedCapability, LocationIdentity,
Ex-PowerViaMDI-PSE

-LLDP-MED Network Policy TLV
Application Type           :

```

```

Unknown Policy Flag      :
VlanType                 :
VlanID                   :
Priority                  :
Dscp                      :

-LLDP-MED Location TLV Info
Location Subtype : Elin Location
Location Info : 36789231367

-LLDP-MED Ex-PowerViaMDI TLV Info
Power Priority      : Critical
Power Value        : 1000
-----

```

## Disabling of Elin Location Subtype

CONTEXT:

### At Switch A:

Configure the *LLDP* module status as enabled. Refer to section “Enabling LLDP” for configuring *LLDP* module status.

1. Disable the configured Elin Location subtype by executing the following commands.

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Disable Elin Location subtype on port P1.

```
iS5comm(config)# interface gigabitethernet 0/1
```

```
iS5comm(config-if)# no lldp med-location elin-location
```

```
iS5comm(config-if)# end
```

2. View the local system information by executing the following command

FOR EXAMPLE: Type the following:

```
iS5comm# show lldp local gigabitethernet 0/1
```

```
Port Id SubType      : Interface Alias
```

```
Port Id              : Gi0/1
```

```
Port Description     : Ethernet Interface Port 01
```

```
Enabled Tx Tlvs      : Port Description, System Name,
```

```
System Description, System Capability,
```

```
Management Address
```

## Extended 802.3 TLV Info

## -MAC PHY Configuration &amp; Status

Auto-Neg Support & Status : ,  
 Advertised Capability Bits : 0000  
 Operational MAU Type : 0  
 -Maximum Frame Size : 1500

## Extended 802.1 TLV Info

-Port VLAN Id : 1

## -Port &amp; Protocol VLAN Id

| Protocol VLAN Id | Support   | Protocol VLAN Status | TxStatus |
|------------------|-----------|----------------------|----------|
| -----            | -----     | -----                | -----    |
| 0                | Supported | Enabled              | Disabled |

## -Vlan Name

| Vlan Id | Vlan Name | TxStatus |
|---------|-----------|----------|
| -----   | -----     | -----    |
| 1       |           | Disabled |

## -Link Aggregation

Capability & Status : Not Capable, Not In Aggregation  
 Aggregated Port Id : 0

## -VID TLV:

| VID      | TxStatus |
|----------|----------|
| -----    | -----    |
| 1dcdf777 | Enabled  |

## -Management Vid TLV:

| Vlan Id | TxStatus |
|---------|----------|
| -----   | -----    |
| 1       | Enabled  |

LLDP-MED Admin Status : Disabled

## -LLDP-MED Capability TLV

LLDP-MED Tx Supported : MedCapability, NetworkPolicy,  
 LocationIdentity,  
 Ex-PowerViaMDI-PSE, Inventory  
 LLDP-MED Tx Enabled : MedCapability, LocationIdentity,  
 Ex-PowerViaMDI-PSE

-LLDP-MED Network Policy TLV

Application Type :

Unknown Policy Flag :

VlanType :

VlanID :

Priority :

Dscp :

-LLDP-MED Location TLV Info

Location Subtype :

Location Info :

-LLDP-MED Ex-PowerViaMDI TLV Info

Power Priority : Critical

Power Value : 1000

-----

# Configuring Tagged LLDP

## 5. Configuring Tagged LLDP

This feature is applicable in an edge virtual bridge (*EVB*) bridge which has Uplink Access Port ( *UAP*) towards servers.

When Tagged *LLDP* is enabled, the *LLDP* packets with destination address as 'nearest bridge address (01-80-c2-00-00-0E)' will be replicated for all S-Channels emulated over that *UAP*. Also, a specific management address which may or may not be present in the system can be

### 5.1. Enabling Tagged LLDP

This section describes how to enable the Tagged *LLDP* feature whose status is set to DISABLED by default.

CONTEXT:

**At Switch A:**

Configure the *LLDP* module status as enabled. Refer to section “Enabling LLDP” for configuring *LLDP* module status.

#### CLI Configuration

1. Enable Tagged *LLDP TLV* by executing the following commands;

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Enable *LLDP-MED* Inventory management *TLV* on port P1.

```
iS5comm(config)# set lldp tag status enable
```

```
iS5comm(config)# exit
```

2. View the local system information by executing the following command

FOR EXAMPLE: Type the following:

```
iS5comm# show lldp
```

```
LLDP is enabled
```

```
LLDP Version                : v2
```

```
Transmit Interval           : 30
```

```
Holdtime Multiplier         : 4
```

```
Reinitialization Delay      : 2
```



```

Notification Interval           : 30
TxCreditMax                     : 5
MessageFastTx                   : 1
TxFastInit                      : 4
Chassis Id SubType              : Mac Address
Chassis Id                      : e8:e8:75:90:5f:81
LLDP Tag Status                : enabled
Configured Management Ipv4 Address : 0.0.0.0
Configured Management Ipv6 Address : ::

```

3. View the information about neighbors learnt on a particular interface by executing the following command;

FOR EXAMPLE: Type the following

```

iS5comm# show lldp traffic gigabitethernet 0/1
Total Frames Out                  : 64
Total Tagged Frames Out           : 32
Total Entries Aged                 : 0
Total Frames In                   : 0
Total Frames Received In Error    : 0
Total Frames Discarded            : 0
Total TLVS Unrecognized           : 0
Total TLVs Discarded              : 0
Total PDU length error Drops      : 0
Total LLDP-MED Frames Out         : 0
Total LLDP-MED Frames In          : 0
Total LLDP-MED Frames Discarded   : 0
Total LLDP-MED TLVs Discarded     : 0
Total Media Capability TLVs Discarded : 0
Total Network Policy TLVs Discarded : 0
Total Inventory TLVs Discarded    : 0

```

## 5.2. Disabling Tagged LLDP

This section describes how to disable the Tagged *LLDP* feature whose status is set to DISABLED by default.

CONTEXT:

**At Switch A:**

Configure the *LLDP* module status as enabled. Refer to section “Enabling LLDP” for configuring *LLDP* module status.

## CLI Configuration

1. Disable Tagged *LLDP TLV* by executing the following commands;

FOR EXAMPLE: Type the following:

- Enter the Global Configuration Mode.

```
iS5comm# configure terminal
```

- Enable LLDP-MED Inventory management *TLV* on port P1.

```
iS5comm(config)# set lldp tag status disable
```

```
iS5comm(config)# exit
```

2. View the local system information by executing the following command

FOR EXAMPLE: Type the following:

```
iS5comm# show lldp
```

```
LLDP is enabled
```

```
LLDP Version : v2
```

```
Transmit Interval : 30
```

```
Holdtime Multiplier : 4
```

```
Reinitialization Delay : 2
```

```
Notification Interval : 30
```

```
TxCreditMax : 5
```

```
MessageFastTx : 1
```

```
TxFastInit : 4
```

```
Chassis Id SubType : Mac Address
```

```
Chassis Id : e8:e8:75:90:5f:81
```

```
LLDP Tag Status : disabled
```

```
Configured Management Ipv4 Address : 0.0.0.0
```

```
Configured Management Ipv6 Address : ::
```